

WorkForce Enterprise

WF-C20600 D4TW



Small-in-One with individual inks, user-friendly Wi-Fi for multiple users and mobile printing.

The Epson Expression Home XP-215 comes with Epson Connect¹, offering greater flexibility and freedom. It allows you to quickly and easily print documents and photos over Wi-Fi from smartphones and tablet PCs. You can also print from anywhere in the world by emailing documents and photos directly to the printer.


Cloud Support

The automatic Wi-Fi set-up² makes configuring laptops and computers to print and scan wirelessly extremely easy. You don't need to know your network settings, as the XP-215 automatically finds the relevant connection settings in order to configure itself.

Automatic Wi-Fi set-up²

Cartridge sizes

DATASHEET / BROCHURE

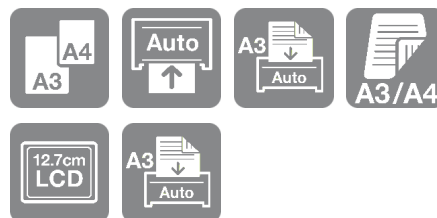

KEY FEATURES

- **Faster performance**
Fast FCOT of 5.6 seconds and print speeds of up to 60ppm
- **High capacity ink yield**
Users can print up to 100,000 pages in mono or 50,000 in colour without changing the ink supplies¹
- **Improved finishing capability**
Advanced finishing such as booklet finisher and hole punch options
- **Powerful scanning capability**
Thin paper support and improved scanning quality
- **Works with Epson Remote Services**
Cloud based, advanced diagnosis of Epson printers and MFPs

PRODUCT SPECIFICATIONS

TECHNOLOGY

| | |
|----------------------|--|
| Printing Method | PrecisionCore™ Micro TFP printhead |
| Nozzle Configuration | 8,676 Nozzles Black, 8,676 Nozzles per Color |
| Minimum Droplet Size | 3.5 pl |
| Ink Technology | DURABrite™ Pro |
| Category | Office Departmental |
| All-in-One Functions | Print, Scan, Copy |

PRINT

| | |
|--|--|
| First Page Out | Monochrome 5.6 Seconds, Colour 5.6 Seconds |
| Printing Speed ISO/IEC 24734 | 60 pages/min Monochrome, 60 pages/min Colour |
| Duplex Printing Speed ISO/IEC 24734 | 60 A4 Pages/min Monochrome, 60 A4 Pages/min Colour |
| Printing Speed ISO/IEC 24734 (A3) | 37 pages/min Monochrome, 37 pages/min Colour |
| Duplex Printing Speed ISO/IEC 24734 (A3) | 37 A4 Pages/min Monochrome, 37 A4 Pages/min Colour |
| Maximum Printing Speed | 60 pages/min Monochrome (plain paper 75 g/m²), 60 pages/min Colour (plain paper 75 g/m²) |
| Printing Resolution | 600 x 2,400 DPI |
| Printing Volume | 400,000 pages per month The maximum number of printed pages per month based on the performance capabilities of the printer, including ISO rated print speeds and paper handling capabilities. |
| Recommended Duty Cycle | 8,000 - 100,000 pages per month |
| Colours | Black, Cyan, Yellow, Magenta |

For detailed information on printing speeds please visit <http://www.epson.eu/testing>.

SCAN

| | |
|-------------------------------|---|
| Double-sided scanning | Yes |
| Scanning Speed | 60 ipm (Monochrome, Single-sided, 300 dpi, ADF); 60 ipm (Colour, Single-sided, 300 dpi, ADF); 110 ipm (Monochrome, Double-sided, 300 dpi, ADF); 110 ipm (Colour, Double-sided, 300 dpi, ADF); |
| Optical Resolution | 600 DPI x 600 DPI (Horizontal x Vertical) |
| Optical Resolution (ADF) | 600 DPI x 600 DPI (Horizontal x Vertical) |
| Advanced document integration | Scan to Email, Scan to FTP, Scan to USB, Computer (Epson Document Capture Pro), USB Memory Device / Card |
| Output formats | BMP, JPEG, TIFF, multi-TIFF, PDF, PNG |
| Scanner type | Contact image sensor (CIS) |
| Optical Resolution | 600 DPI x 600 DPI (Horizontal x Vertical) |

FAX

| | |
|------------------------|---|
| Type of fax | Walk-up black and white and colour fax capability |
| Fax Transmission Speed | Up to 33.6kbps / Approx. 3 sec/page |
| Error correction mode | CCITT/ITU Group3 fax with Error Correction Mode |
| Fax speed dials (max) | 2,000 names and numbers |
| Page memory | Up to 550 pages/ 6MB (ITU-T No. 1 chart) |
| Fax Functions | PC Fax, Fax to E-mail, Memory Reception, Auto Redial, Fax to Folder, Address Book, Fax Preview, Polling Reception |

WorkForce Enterprise WF-C20600 D4TW

WHAT'S IN THE BOX

- Information sheet
- Power cable
- User guide

PRODUCT SPECIFICATIONS

WorkForce Enterprise WF-C20600 D4TW

COPY

| | |
|--------------------------|--|
| Copy Speed | Up to 60 ipm Black, Up to 60 ipm Colour *Simplex ADF 600 x 600 dpi (ISO/ IEC 24735) |
| Copy resolution (dpi) | 600 x 1200 |
| Reduction / Enlargement | 25 % - 400 % |
| Maximum number of copies | 9,999 |
| Maximum Copy Size | A3 |

CONNECTIVITY

| | |
|------------------------------|---|
| Network Printing Protocols | IPP, LDP, Port 9100, WSD |
| Network Management Protocols | SNMP, HTTP, DHCP, BOOTP, APIPA, DDNS, mDNS, SNTP, SLP, WSD, LLTD, Ping, SNMP |
| Network Protocol | 2.0c, SNMP 3.0 |
| Network Protocol | IPv4, IPv6 |
| Network Scanning Protocols | WSD-Scan, FTP |
| Interfaces | 10 Base-T, Ethernet interface (100 Base-TX / 10 Base-T), Ethernet 1000, Ethernet Interface (1000 Base-T/ 100-Base TX/ 10-Base-T), Wireless LAN IEEE 802.11a/b/g/n, Wi-Fi Direct, USB 1.0-A, USB 2.0-A, USB 3.0 Type B |
| WLAN Security | WEP 64 Bit, WEP 128 Bit, WPA PSK (TKIP), WPA PSK (AES) |
| Network Protocol | TCP/IPv4, TCP/IPv6, TCP, HTTP, HTTPS, IPv4, IPv6, IPSEC, SSL/TLS |

PAPER / MEDIA HANDLING

| | |
|---------------------------------|---|
| Paper Formats | A3 (29.7x42.0 cm), A4 (21.0x29.7 cm), Postcard, A3+, A5 (14.8x21.0 cm), A6 (10.5x14.8 cm), B4, B5, B6, C4 (Envelope), C5 (Envelope), C6 (Envelope), DL (Envelope), Executive, Letter, Legal, HLT, No. 10 (Envelope), User defined |
| Automatic Document Feed | 150 pages |
| Compatible Paper Weight | 60 - 350g/m ² |
| Duplex | Yes (A4/A3, plain paper) |
| Standard Paper input | 2,350 Sheets Standard, 150 Sheets MP tray, 550 Sheets paper tray |
| Output Tray Capacity | 550 Sheets |
| Maximum paper input | 5,350 |
| Rear paper path (special media) | Yes |
| Number of paper trays | 4 |

PAPER FEED RASF

| | |
|-------------------------|--|
| Paper Input Name | RASF |
| Paper Formats | A3+, A3, A4, A5, A6, B4, B5, B6, C4 (Envelope), C5 (Envelope), C6 (Envelope), DL (Envelope), Letter, 20 x 25 cm, HLT, User defined, SRA3 |
| Custom sizes | Min 55x 330 mm to Max 127x 1,200 mm |
| Compatible paper weight | 60 g/m ² - 350 g/m ² |
| Paper Capacity 1 | 150 80gsm |
| Media type | Plain Paper, Recycled Paper, Colour Paper, Letterhead |

PAPER FEED C1

| | |
|-------------------------|---|
| Paper Input Name | C1 |
| Paper Formats | A3, A4, A5, B4, B5, Letter, HLT, Executive |
| Custom sizes | Min 140x 297 mm to Max 182x 432 mm |
| Compatible paper weight | 60 g/m ² - 160 g/m ² |
| Paper Capacity 1 | 550 80gsm |
| Media type | Plain Paper, Recycled Paper, Colour Paper, Letterhead |

PAPER FEED C2-C4

| | |
|-------------------------|---|
| Paper Input Name | C2-C4 |
| Paper Formats | A3, A4, A5, B4, B5, Letter, HLT |
| Custom sizes | Min 140x 297 mm to Max 182x 432 mm |
| Compatible paper weight | 60 g/m ² - 160 g/m ² |
| Paper Capacity 1 | 550 80gsm |
| Media type | Plain Paper, Recycled Paper, Colour Paper, Letterhead |

PAPER FEED LCT

| | |
|-------------------------|--|
| Paper Input Name | LCT |
| Paper Formats | A4, Letter |
| Compatible paper weight | 60 g/m ² - 160 g/m ² |
| Paper Capacity 1 | 3,000 80gsm |
| Media type | Plain Paper, Recycled Paper, Colour Paper |

PAPER FEED DUPLEX

| | |
|-------------------------|--|
| Paper Input Name | Duplex |
| Compatible paper weight | 60 g/m ² - 160 g/m ² |

PRODUCT SPECIFICATIONS

GENERAL

| | |
|------------------------------|---|
| Energy Use | 160 Watt (standalone copying, ISO/IEC 24712 pattern), 1.1 Watt (sleep mode), 76 Watt (Ready), 0.1 Watt (Power off), TEC 0.31 kWh/week |
| Supply Voltage | AC 100 V - 240 V, 50 Hz - 60 Hz |
| Product dimensions | 674 x 757 x 1,243 mm (Width x Depth x Height) |
| Product weight | 177.1 kg |
| Compatible Operating Systems | Mac OS 10.10.x, Mac OS 10.7.x, Mac OS 10.8.x, Mac OS 10.9.x, Mac OS X 10.11.x, Mac OS X 10.12.x, Mac OS X 10.13.x, Mac OS X 10.6.8, Windows 10 (32/64 bit), Windows 11, Windows 7 (32/64 bit), Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows Server 2003 R2 x64, Windows Server 2003 SP2, Windows Server 2008 R2, Windows Server 2016, Windows Vista (32/64 bit), Windows XP SP3, Windows XP SP3 or later (32-bit), Windows Server 2003 SP2 or later, XP Professional x64 Edition SP2 |
| Sound Power | Operation:7.5 B (A) |
| Noise | Operation:60 dB (A) |
| Power supply | 220V, 240V |

ADDITIONAL FEATURES

| | |
|--------------------|--|
| Features | Touchscreen |
| Panel | Type: Color, Touchscreen, Diagonal:22.7 cm |
| Media Handling | Duplex (A4/A3, plain paper) |
| Security Functions | Limit access function with Epson Web Config, Secure confidential printing with PIN code release, LDAP Address Book, IPsec, IEEE802.1x, SSL (Server authentication), Panel Admin Mode |
| HDD | HDD, Encrypted, 320GB |

OTHER FEATURES

| | |
|------------|--|
| Emulations | PCL5c, PCL6, PostScript 3, PDF 1.7, ESC/P, ESC/P-R, PCL5e, ESC/Page, ESC/Page-Colour |
|------------|--|

SUPPLIES

| | |
|--|--------------|
| ● WorkForce Enterprise WF-C20600 Black Ink | 50,000 pages |
| ● WorkForce Enterprise WF-C20600 Cyan Ink | 50,000 pages |
| ● WorkForce Enterprise WF-C20600 Magenta Ink | 50,000 pages |
| ● WorkForce Enterprise WF-C20600 Yellow Ink | 50,000 pages |
| ● Maintenance box | |
| ● WFE Paper Feed Roller for Cassette | |

OPTIONAL ACCESSORIES

- EpsonNet 10/100/1000Base Tx Int
- Super G3/G3 Fax Board
- Cassette Lock

WorkForce Enterprise WF-C20600 D4TW

INK YIELD DATA



● 50,000 pages*

● 50,000 pages*

* Approx. page yield based on ISO/IEC 24711/24712 or ISO/IEC 29102/29103. Actual yield will vary depending on images printed and usage conditions. For more information visit <http://www.epson.eu/pageyield>

1. ¹Approx. page yield with the WF-C20600. Actual yield will vary depending on images printed and usage conditions. For more information visit www.epson.eu/pageyield.

2. ²Fax optional in certain territories at an additional cost. Please contact your local Epson office for more information.

3. ³Approx. based on internal testing; may vary depending on the number of copies selected, the output environment, as well as the settings for size, orientation, position of paper.

EPSON®