PRODUCT CATALOGUE

2025





ABOUT US IN A NUTSHELL

We are a family business operating for over 20 years based in the south-east of Poland that specialises in the production and distribution of premium quality engineered flooring.

Every year, we export over 90% of our products that enrich the space of customers in Europe, North America and Poland.

Our production facilities are equipped with modern tools: a line for profiling floors by H.B Schroeder GmbH, a line for oiling and varnishing by CEFLA Finishing and an automatic line for packing floors by Mecca Moderna.

20

We have been operating continously for over 20 years

500.000

We delivery over 500.000m2 of flooring per year

7 production halls

17 wood drying chambers

Our professionalism and the quality of the flooring has been confirmed by the following certificates:













A line for profiling floors by H.B Schroeder GmbH Germany




A line for UV oiling and varnishing by CEFLA Finishing Italy



A line for packing floors by Meccanica Moderna Italy

OUR TECHNOLOGY

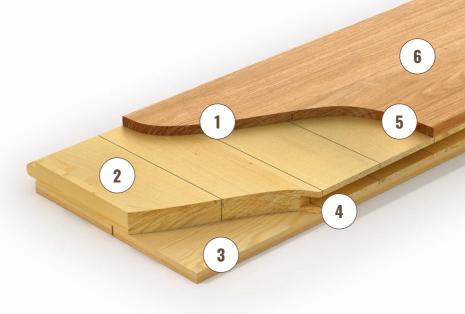

1.

The European noble oak top layer of a 3-6mm thickness

2.

The middle layer made of coniferous underlay in the form of slats

3.

The bottom layer made of 2mm spruce veener

4.

A Tongue-and-groove joint or a Click 5G connection

5.

An option of both brushed and smooth surface as well as 2V/4V bevel *6.

Multiple layers of oil-wax in differents colours hardened by UV rays



OUR PRODUCTS



PREMIUM

This is the highest grade available in timber flooring. Specially selected material with a delicate wood grain and subdued, uniform colouring. Small knots allowed only. Sapwood does not occur. If you like an engineered oak floor with minimal feature and character, this is for you.

STANDARD

The wood contains very few and small knots. Colour variation is controlled to the minimum. The finish will be clear, with virtually no major visible flaws. It's perfect for customers who want clean and uniform look of their floor.

STYLE

Products are characterized by clear and contrasting grains, as well as visible knots and cracks. The putty used to fill in the cracks can be either lighter or darker in colour and can look attractive in both ways, depending on personal preference. This is the floor for you if you like feature and character.

* WIDE PLANK


13 to 20mm Thickness (≤ 0.2mm)

Length (+/-0,1%) From 1080 to 3000mm (1080, 1600, 1800, 2200, 2400, 3000mm)

Width (+/- 0.2mm) From 140 to 300mm (140, 160, 190, 250, 300)









* HERRINGBONE AND CHEVRON

Thickness (≤ 0.2mm)

13 to 20mm

Length (+/-0,1%) Width (+/- 0.2mm) From 450 to 1100mm (450, 600, 700, 900, 1100)

From 90 to 140mm (90, 100, 120, 140)



HERRINGBONE PREMIUM



HERRINGBONE STYLE







+48 784 204 482 PODLOGI.PL@GMAIL.COM WWW.PODLOGI.EU.COM

> PODŁOGI SP. Z.O.O. UL. KOLEJOWA 7 37-100 ŁAŃCUT

