

**D-TACK**  
FOR PROFESSIONALS



PRODUCT BROCHURE  
**FLOORING & INTERIOR DESIGN**  
2024/2025



## A GOOD RELATIONSHIP

Dear readers,

D-TACK offers quality service and best product quality, since 1995!  
If your goal is to work efficiently - we will match perfectly!

We at D-TACK set a high value on a good business relationship with you and have therefore specialized ourselves on the demands of interior designers and flooring installers.

The foundation of the partnership that we offer lies in a carefully selected product range, which we update and optimize regularly. Our professional technical advisors support and advise you by phone or via E-Mail at any time should you need us.

D-TACK GmbH deals with developing, perfecting and with the direct sale of products for the craft. Today the company employs more than 80 employees in the areas of technology, sales and administration.

I look forward to a good business relationship!



Florian Müller  
Managing Director



**»All of our employees are working very hard to satisfy your every need.«**



## INSTALLATION OF SKIRTING BOARDS

P. 04 - 09

## DRY-FITTING

P. 10 - 21

## BONDING OF STAIR COVERINGS

P. 22 - 24

## FLOOR PROTECTION

P. 25 - 27

## CONTACT

- ☎ +49 (0) 73 61 / 63 37-262 - Sales Dept.
- ☎ +49 (0) 73 61 / 63 37-100 - Main Desk
- 🖨 +49 (0) 73 61 / 63 37-101
- ✉ sales@d-tack.com

D-TACK GmbH  
Handwerkerstr. 1  
73460 Hüttlingen / Germany



# INSTALLATION OF SKIRTING BOARDS



# INSTALLATION OF SKIRTING BOARDS

SKIRTING TAPES

HOT-MELT GLUE

ACCESSORIES

CONNECTIONS, OVERLAPPING & PENETRATIONS

SEALING SLEEVES & NAIL SEALINGS

SEALANTS & PU-FOAMS

WINDOW CONNECTIONS



## TACIT® for the wall installation of skirting



For the installation of textile skirting as well as the bonding of carpet strips into inlay skirting.

Suitable for all common surfaces with a wall structure of up to 1,5 mm.

Tested and approved for coverings with:

- synthetic double backings (SDR)
- textile secondary backing (TR)
- fleece backing (PES)

Material: Special acrylic adhesive with reinforcing polyester thread, with double-sided strong adhesion.

- Permanent, invisible bonding of skirting
- Time saving in comparison to wet adhesives
- High initial and permanent adhesion
- Odourless and free of solvents,
- Approved for private and public interiors
- Adhesive coating: 250 g/m<sup>2</sup>



Recommended for the installation of materials from the following manufacturers: Anker, Girloon, HTP, Dura, Infloor, etc.

Item-No.	Width x Length	Packaging Unit
105030	30 mm x 50 m	40 ro.
105040	40 mm x 50 m	28 ro.
105050	50 mm x 50 m	36 ro.
105055	55 mm x 50 m	30 ro.
105070	70 mm x 50 m	24 ro.

## TACIT®spezial for the wall installation of hardboard & carpet skirting



For the installation of common hardboard skirting (max. wall structure: 1mm) as well as for carpet skirting (max. wall structure: 3mm) with:

- synthetic double backings (SDR)
- textile secondary backing (TR)
- fleece backing (PES)
- woven fabrics
- needle felt

Material: Special acrylic adhesive with reinforcing polyester thread, with double-sided heavy duty adhesion

- Permanent, invisible bonding of skirting
- Time saving in comparison to wet adhesives
- High initial and permanent adhesion
- Odourless and free of solvents,
- Approved for private and public interiors
- Adhesive coating: 450 g/m<sup>2</sup>



Recommended for the installation of materials from the following manufacturers: Anker, Girloon, HTP, Dura, Infloor, Filzfabrik Fulda, Fabromont, Döllken, Bolta, etc.

Item-No.	Width x Length	Packaging Unit
115035	35 mm x 50 m	32 ro.
112545	45 mm x 25 m	36 ro.
115050	50 mm x 50 m	24 ro.
115060	60 mm x 50 m	20 ro.



Installation of a solidcore-skirting profile



Installation of textile skirting strips



Applying pressure to a freshly installed needle-felt strip

## TACIT<sup>®</sup>one for common cases of skirting installation



For the installation of a multitude of skirting boards as well as covering strips. The release liner made of PE-foil prevents it from tearing when removing it from the tape.

For all common solidcore- / rigid foam core skirting on all common surfaces with a wall structure of up to 0,5 mm. Also ideal for the installation of textile skirting with a wall structure of up to 1,5 mm.

Tested and approved for textile coverings with:

- synthetic double backings (SDR)
- textile secondary backing (TR)
- fleece backing (PES)

as well as woven goods and needle felt.

Also ideal for the bonding of carpet strips into inlay-skirting and rubber strips.

Material: Special acrylic adhesive with reinforcing polyester thread, with double-sided strong adhesion.

- Universally usable
- PE-foil liner, no tearing
- Permanent skirting installation
- Strong initial- and permanent adhesive power
- Odourless and free of solvents, therefore approved both for private as well as public interiors
- PE-foil liner can be recycled

Recommended for the installation of materials from the following manufacturers: Anker, Girloon, HTP, Dura, Infloor, Filzfabrik Fulda, Fabromont, Döllken, Bolta, SaarFloor, Nora, etc.


Item-No.	Width x Length	Packaging Unit
135035	35 mm x 50 m	32 Ro.
135050	50 mm x 50 m	24 Ro.
135070	70 mm x 50 m	16 Ro.
135090	90 mm x 50 m	12 Ro.

## PRIVATE LABEL - OUR PRODUCTS IN YOUR DESIGN

Most of our adhesive tapes are available in custom widths and / or with your own design.

### PRIVATE LABEL IN 8 EASY STEPS:

1. Approach your contact person at D-TACK to discuss availability and first details
2. D-TACK designs the layout-drafts according to your corporate design-guidelines
3. Confirmation of those drafts by you or your employees
4. Printing of the labels in high quality and colour fastness
5. Labeling of the ordered products with your custom labels
6. Order picking of your goods for a delivery on time
7. Delivery of the goods to your preferred delivery address
8. Satisfied customers!

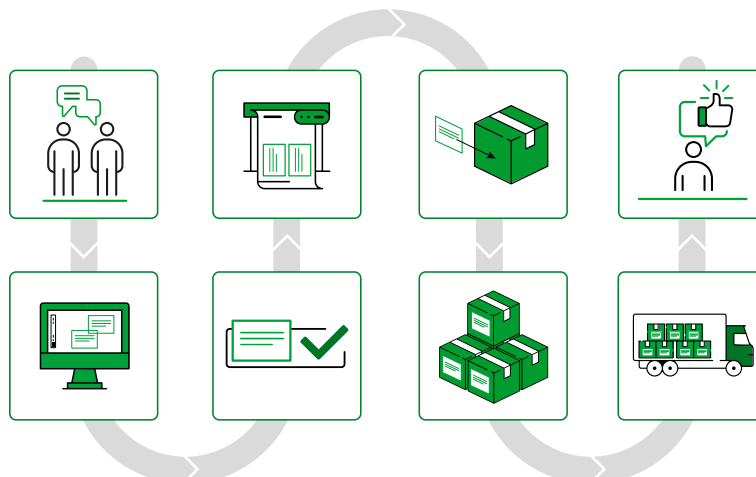

## TACIT®lino-gum for rubber skirting, PVC- and linoleum strips



Recommended for the installation of materials from the following manufacturers: SaarFloor, Nora, Gerflor, etc. as well as linoleum from several manufacturers.

For the installation of rubber skirting as well as for covering strips made of homogeneous PVC and linoleum.

Ideal for all common surfaces with a wall structure of up to 1,5 mm.

Suitable for:

- linoleum strips into inlay skirting
- for the creation of PVC-/ rubber socket with and without coverings

Material: Special acrylic adhesive with reinforcing polyester thread, with double-sided, very strong adhesion.

- Permanent, invisible bonding of skirting
- Time saving in comparison to wet adhesives
- Odourless and free of solvents,
- Approved for private and public interiors
- Adhesive coating: 330 g/m<sup>2</sup>

Item-No.	Width x Length	Packaging Unit
155040	40 mm x 50 m	28 ro.
155050	50 mm x 50 m	24 ro.
155060	60 mm x 50 m	20 ro.
155070	70 mm x 50 m	16 ro.
155090	90 mm x 50 m	12 ro.



Tape width 40 mm

For linoleum and covering strips made of homogenous PVC and rubber skirting



Tape width 50 mm

For rubber profiles, linoleum strips and strips made of homogenous PVC



Tape width 90 mm

For homogenous PVC- / rubber-coverings with / without coving profiles

## TACIT®elastic for soft PVC skirting, PVC rigid socket, LVT stripes into inlay



Recommended for the installation of materials from the following manufacturers: Döllken WL, Bolta WSL, etc.

For the installation of PVC soft skirting and CV rigid skirting as well as for LVT strips into inlay skirting and wall area.

Suitable for all common surfaces with flat and finely felted wall structures of up to 0,5 mm.

Tested and approved for coverings with:

- PVC soft skirting with a flat back
- Rigid skirting made of CV or heterogeneous PVC
- Covering strips made of PVC/CV, LVT into inlay skirting
- Door mat products (FR-back) and Flotex into inlay skirting

Material: Modified acrylic adhesive on a stabilizing foil carrier. Double-sided adhesion with varying degrees of bond strength. Stronger adhesion on the wall-facing side, with a blocker against plasticizer migration on the side of the covering.

- Foil carrier with double-sided adhesion with a varying degree of bond strength as well as a blocker against plasticizer migration
- Permanent, invisible bonding of skirting
- Time saving in comparison to wet adhesives
- Odourless and free of solvents,
- Approved for private and public interiors

Item-No.	Width x Length	Packaging Unit
185045	45 mm x 50 m	36 ro.
185055	55 mm x 50 m	30 ro.
185095	95 mm x 50 m	18 ro.



Installation of PVC-soft-skirting



Installation of profiles made of CV / heterogeneous PVC



Installation of LVT covering strips into inlay-skirting



## WOODtac mounting adhesive for wooden skirting and metal profiles



For the invisible bonding of wooden skirting and metal profiles on all common surfaces. Also for the application of stucco skirting made of hard foam and PU.

Suitable for rough structured surfaces.

Material: fast setting, solvent free 1K-polymer adhesive.

- Permanent, invisible bonding of skirting
- Replaces nails and screws
- Permanently elastic, stable against construction movements
- Odourless and free of solvents, therefore approved both for private as well as public interiors
- Apply even faster now: With our Multi-tip nozzle!

Multi-tip nozzle:

For a the smooth and even application of cartridge adhesives. Skirtings with widths up to 70 mm can be coated with adhesive in a single step.

Material: Impact resistant, rigid plastic.



Item-No.	Content	Packaging Unit
Z140546	310 ml = 490 g	24 pcs.
Z650043	Multi-tip nozzle	20 pcs.

## HOTtac GUN and glue sticks including 4 nozzles

Sturdy carrying case with space for HOTtac glue sticks



### HOTtac GUN:

Industrial hot melt gun for the processing of glue sticks with ø 18 mm.

Including three straight and one cranked nozzle with heat protection. Comes in a sturdy carrying case.

Material: GS-tested electric tool, with 600 W.

### HOTtac glue sticks:

For the installation of hardboard skirting on walls with structures up to 3 mm.

Tested and approved for hardboard skirting from the following manufacturers:

Döllken, Bolta, Carl Prinz, etc.

Material: solvent free, transparent industrial hot melt glue. 300 mm length and ø 18,3 mm, suitable for all 18 mm professional hot melt guns with a minimum processing temperature of 170 °C.

- Temperature regulation between 140 °C - 230 °C
- Short heat-up time
- Easy and smooth output of glue
- No dripping
- Cable length: 2,3 m
- Replaces nails and screws
- Invisible and safe installation
- Permanently elastic
- Withstands construction movements and mechanical stress
- Free of solvents and therefore approved both for private as well as public interiors
- Consumption: depending on profile and substrate, approx. 400 m – 700 m per 10 kg

Item-No.	Content	Packaging Unit
990012	1 pistol in a case incl. 4 special nozzles	1 pc.
Z990012	Spare cranked nozzle, 150°	2 pcs.
Z143018	Glue sticks, 2,5 kg	12 bags (= 30 kg)



# DRY-FITTING


DRY-FITTING

EDGE TAPES

INSTALLATION TOOLS AND ACCESSORIES

# DUO-LAY®

for the full-area, removable installation onto flat subfloors.

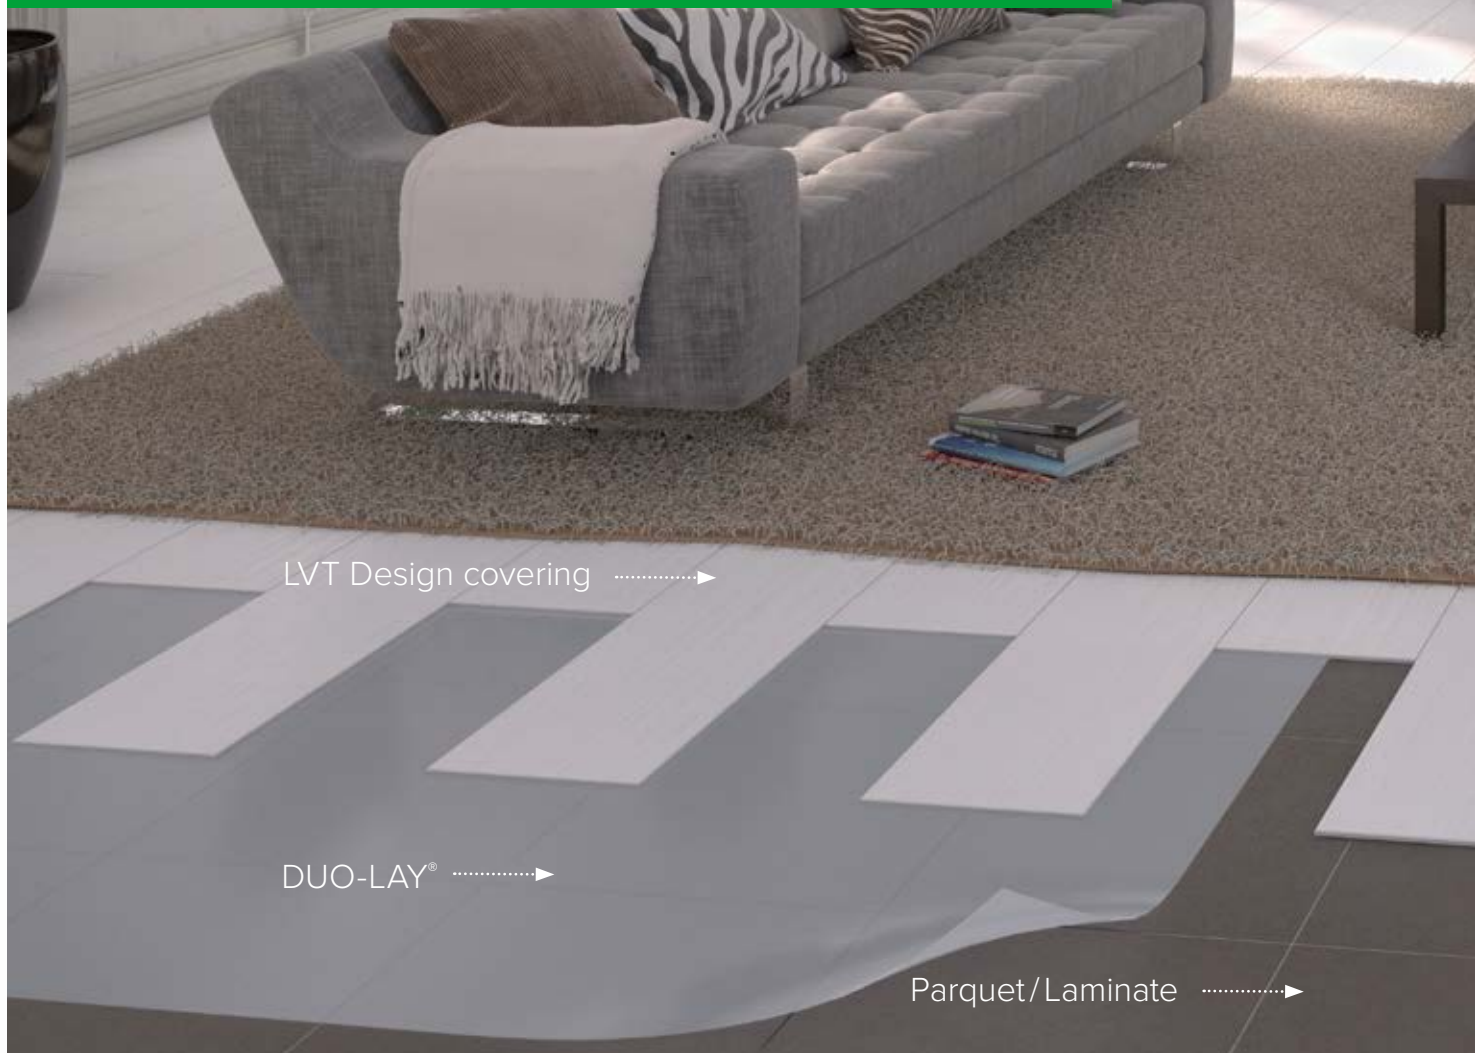

LVT Design covering →

DUO-LAY® →

Parquet/Laminate →

- ✓ Time saving / no flash-off times
- ✓ Immediately accessible

- ✓ Removable without residues
- ✓ No dirt/dust during change of flooring



## SUITABLE COVERINGS

- LVT design coverings<sup>1)</sup>, PVC- /CV coverings<sup>2)</sup>
- Rubber tiles
- Textile coverings with fleece backing (PES) and double backing (TR, SDR)
- Needle felt (PP-fibre), ball-yarn etc.
- SL tiles (e.g. Tretford ECO tiles)
- Flotex, Sauberlauf latex backing (Coral FR)
- Dovetail plates (Gerflor GTI)



## SUITABLE SUBFLOORS

- Laminate
- Varnished parquet
- Varnished cork
- Linoleum
- Ceramic tiles\*
- PVC-/CV coverings
- Rubber coverings



## SYSTEM-PRODUCTS



<sup>1)</sup> dimensionally stable up to 0,25 % (EN 434)

<sup>2)</sup> dimensionally stable up to 0,4 % (EN 434), afterwards with seam-welding

\*Our professional adviser support you at questions for installation details of nature stone covering and Terrazzo.



## DUO-LAY®



### PROPERTIES

- For private or public sectors
- Ideal for underfloor heating
- For office chair & wheel chair according to DIN 12529
- Plasticizer migration resistant
- Cleaning resistant
- Free of solvents and therefore replacement according to TRGS 610
- General building inspectorate approval

Full-area installation of PVC-/CV, design coverings (LVT) and textile coverings on existing subfloors like PVC/CV, ceramic tiles, linoleum, parquet, laminate and rubber.

The special foil carrier is less tacky at the lower side and therefore smooth to the subfloor when being removed. The upper side has a high tack to achieve an optimal connection with the new floor covering.

Tested and approved for products from: Amtico, Anker, Girloon, Gerflor, Flotex/Forbo, HTP, WPT, Dura, Fabromont, Toucan-T, Infloor, Wineo, Debolon, Vorwerk, etc.

### SAFETY & CERTIFICATES



Item-No.	Width x Length	Packaging Unit
1625500	500 mm x 25 m	6 ro. (= 75 m <sup>2</sup> )
162510	1000 mm x 25 m	3 ro. (= 75 m <sup>2</sup> )

Tests should be done directly on site, installation instructions should always be adhered to.

# EXTRA-LAY®

for the full-area, removable installation on fillers.



- ✓ Time saving / no flash-off times
- ✓ Immediately accessible

- ✓ Good plasticizer migration resistance
- ✓ Removable without residues (D-TACK REMOVE)

## SUITABLE COVERINGS

- LVT design coverings<sup>1)</sup>, PVC- /CV coverings<sup>2)</sup>
- Rubber tiles
- Textile coverings with fleece backing (PES) and double backing (TR, SDR)
- Needle felt (PP-fibre), ball-yarn etc.
- SL tiles (e.g. Tretford ECO tiles)
- Flotex, Sauberlauf latex backing (Coral FR)
- Dovetail plates (Gerflor GTI)

## SUITABLE SUBFLOORS

- Primed screed
  - Primed putty
  - Primed chipboard
  - Primed OSB-/MDF plates (Jumpax)
  - Untreated metal
  - Access floor
  - Short-pile textile coverings
- (for further intended uses please contact your professional adviser)

## SYSTEM-PRODUCTS



<sup>1)</sup>form stable up to 0,25% according to EN 434

<sup>2)</sup>form stable up to 0,4% according to EN 434, overhaed with seam welding

For a residue free removal hard surfaces have to be primed with D-TACK REMOVE.



## EXTRA-LAY® dry-fitting of textile and LVT-coverings



Full-area installation of PVC-/CV and design coverings (LVT), textile coverings or carpet tiles on with D-TACK REMOVE primed subfloors like screed, putty, chipboard and OSB plates.

D-TACK EXTRA-LAY is made of a high quality mesh which is coated with adhesive on both sides.

Tested and approved for products from: Amtico, Anker, Girloon, Gerflor, Flotex/Forbo, HTP, WPT, Dura, Fabromont, Toucan-T, Infloor, Wineo, Debolon, Vorwerk, Unifloor, etc.

### **i** PROPERTIES

- For private or public sectors
- Ideal for underfloor heating
- Suitable for office chair & wheel chair according to DIN 12529
- Plasticizer migration resistant
- Cleaning resistant
- Free of solvents and therefore replacement according to TRGS 610
- General building inspectorate approval




### **SAFETY & CERTIFICATES**



Item-No.	Width x Length	Packaging Unit
142550	500 mm x 25 m	6 ro. (= 75 m <sup>2</sup> )
142510	1000 mm x 25 m	3 ro. (= 75 m <sup>2</sup> )

Tests should be done directly on site, installation instructions should always be adhered to.

**POWER-LAY®** for the permanent installation of textile coverings.

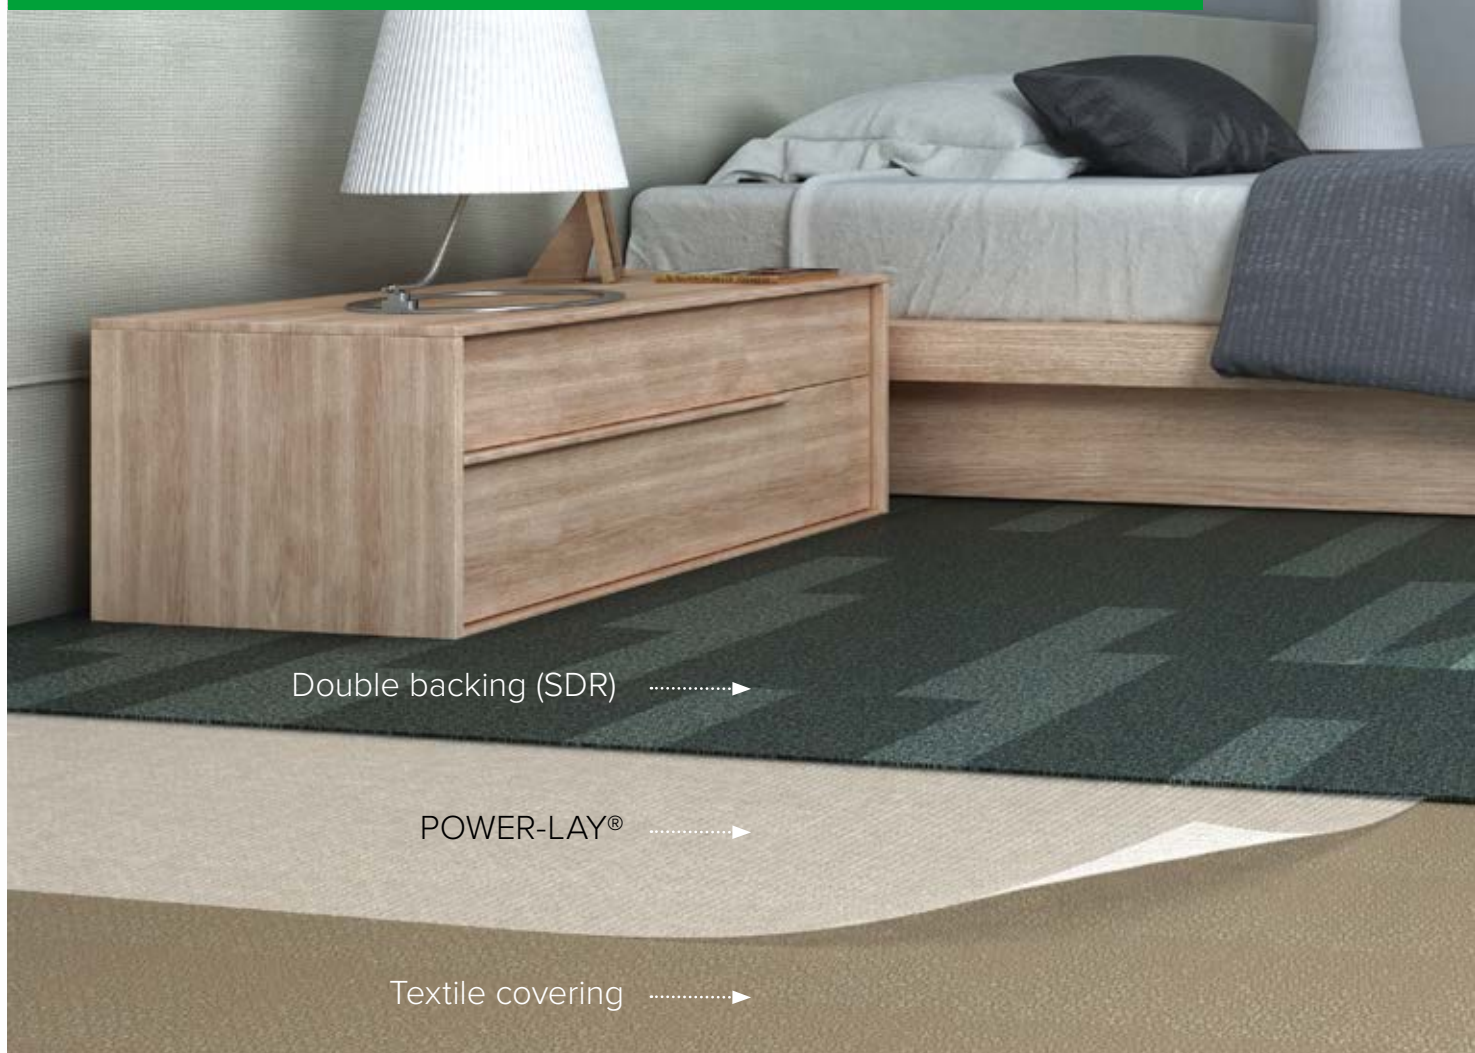

- ✓ Time saving at renovations
- ✓ Very high initial tack

- ✓ No flash-off times
- ✓ Immediately accessible



**SUITABLE COVERINGS**

- Textile coverings with fleece backing (PES) and double backing (TR, SDR)
- Needle felt (PP-fibre), ball-yarn etc.



**SUITABLE SUBFLOORS**

- Needle felt
- Short-pile textile coverings
- Primed screed
- Primed putty
- Primed chipboards
- Primed OSB-/MDF plates
- Access floor



**SYSTEM-PRODUCTS**



Not suitable for subfloors containing plasticizers like CV/PVC coverings.





## POWER-LAY® dry-fitting of textile coverings



Full-area, permanent installation of textile coverings onto existing carpets, primed chipboard and putty.

D-TACK POWER-LAY consists of a highly flexible polyester thread with an extremely strong glue coating. The special adhesive migrates durable into the particular material and ensures an ideal adhesion.

Tested and approved for products from: Fabromont, Findeisen, HTP, Infloor, Vorwerk, Filzfabrik Fulda, Anker, Girloon, Dura, etc.

### PROPERTIES

- Suitable for private or public sectors
- Ideal for underfloor heating
- Suitable for office chair & wheel chair according to DIN 12529
- Free of residential toxins, solvents, etc.
- General building inspectorate approval

### SAFETY & CERTIFICATES




Item-No.	Width x Length	Packaging Unit
152550	500 mm x 25 m	8 ro. (= 100 m <sup>2</sup> )
152510	1000 mm x 25 m	4 ro. (= 100 m <sup>2</sup> )

Tests should be done directly on site, installation instructions should always be adhered to.

# DRY-FITTING MESH SOFT

for the fixation on various subfloors.

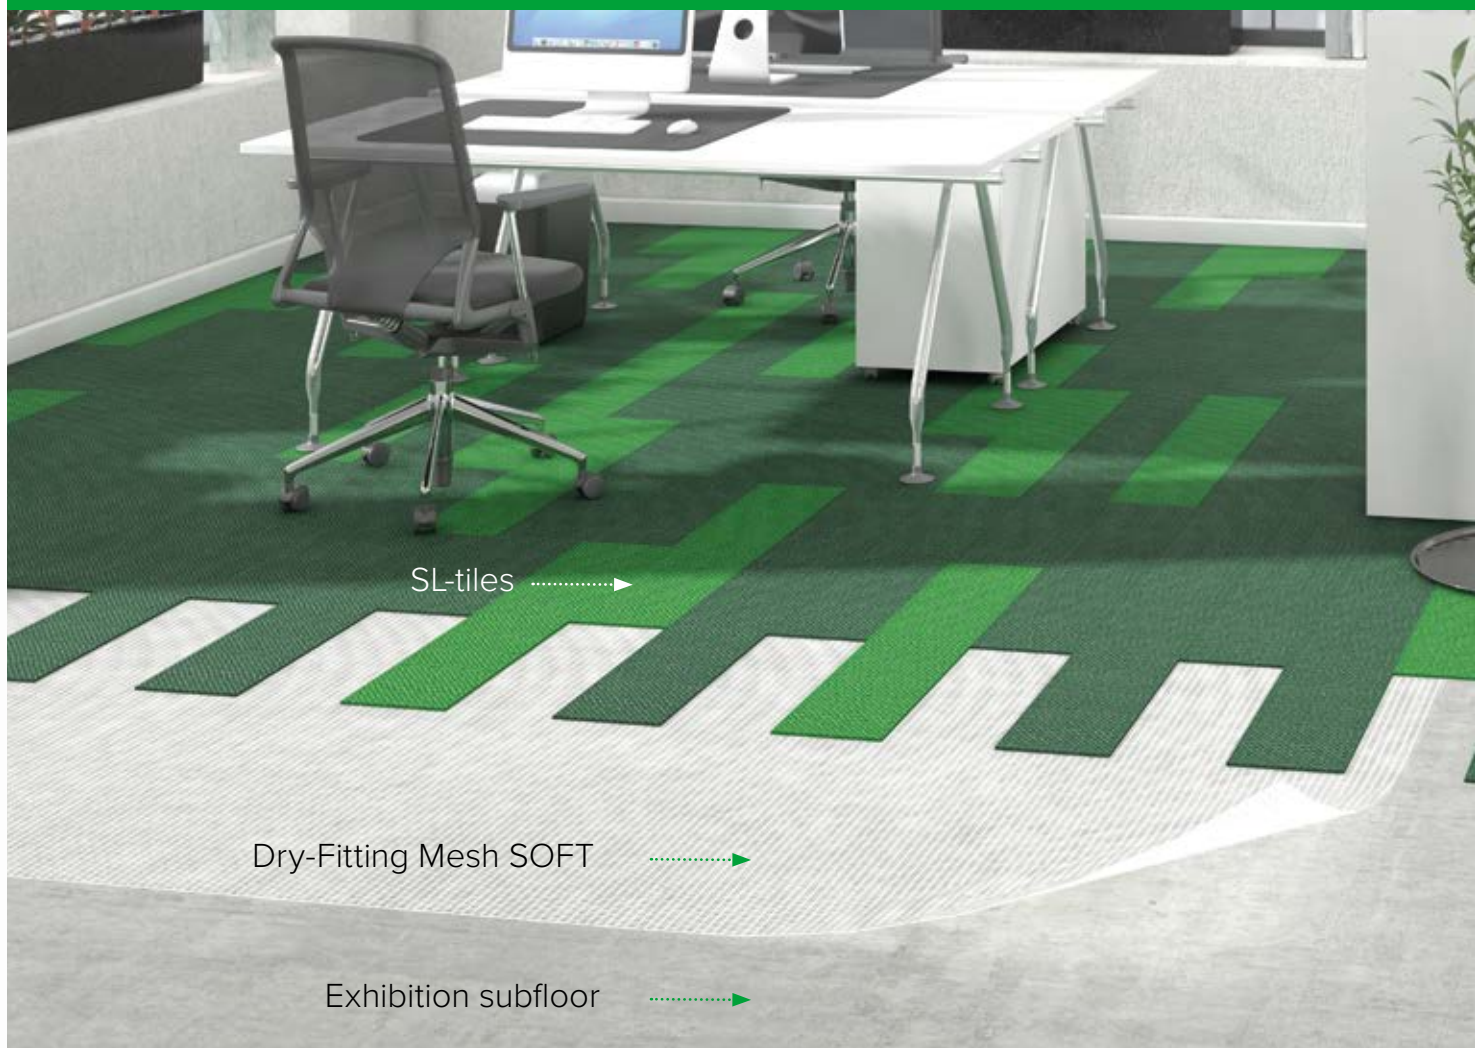

- ✓ For trade fairs and exhibitions
- ✓ Smooth and quick installation

- ✓ For CV- /textile coverings
- ✓ Removable by hand at any time

## SUITABLE COVERINGS

- CV coverings<sup>1)</sup>
- Exhibition coverings
- SL tiles (for e.g. Tretford ECO tiles)
- Textile coverings with fleece backing (PES) and double backing (TR, SDR)

## SUITABLE SUBFLOORS

- Primed putty
- Exhibition subfloors
- Primed chipboards
- Primed OSB-/MDF plates
- PVC-/CV subfloors
- Ceramic tiles
- Linoleum
- Laminate
- Varnished parquet
- Varnished cork

## SYSTEM-PRODUCTS



<sup>1)</sup>form stable up to 0,4 mm according to EN 434, beyond that with seam welding.



## Dry-Fitting Mesh **SOFT** dry-fitting and fixation of textile- and CV-coverings



Full-area fixation of CV- and textile coverings. Ideal for all common undergrounds and existing subfloors like for e.g. PVC/CV, ceramic tiles, linoleum, parquet and laminate.

Dry-Fitting Mesh **SOFT** consists of a strong glass fibre mesh which is coated with adhesive on both sides.

Tested and approved for products from: Tarkett, Gerflor, Tretford, etc.

### **i** PROPERTIES

- Plasticizer migration resistant
- Immediately accessible
- No flash-off times
- Free of solvents and therefore replacement according to TRGS 610
- General building inspectorate approval

### **SAFETY & CERTIFICATES**



Item-No.	Width x Length	Packaging Unit
172550	500 mm x 25 m	8 ro. (= 100 m <sup>2</sup> )
172510	1000 mm x 25 m	4 ro. (= 100 m <sup>2</sup> )

Tests should be directly on site, installation instructions should always be adhered to.

## LAY-Brush EVO „1 man installation tool“, enables standing floor installation

**Patented by D-TACK!**  
Saves knees, back and time!



Ergonomic, installation tool for the easy application of all D-TACK dry-fitting layers.

The special bristles ensure an even pressure distribution and therefore guarantee the application without bubbles and creases. The lift device to hook the roll guarantees effortless unwinding.

Material: Durable materials, easy transport due to the removable handle.

- Easy transportation thanks to the removable handle
- Even pressure distribution due to the special bristles
- Saves time and effort, as the roll is unrolled without floor contact

Item-No.	Width x Length	Packaging Unit
990011	1 m x 1,25 m	1 pc.

## DUO-LAY® Tape for the reinforcement of edges from DUO-LAY®



For the use at edges when installing floor coverings with DUO-LAY®. Ideal for the fixation of textile- and CV coverings. Also perfectly suitable for trade fairs and exhibitions.

Material: Special foil, high adhesion on the upper side, lower adhesion on the bottom side.

- Removable without residues
- Plasticizer migration resistant
- High tear resistance
- Suitable for underfloor heating
- With general building inspectorate approval (DiBt - institute for Building Technology)
- EC1<sup>PLUS</sup> certified (for additional information, visit [www.emicode.com/en/](http://www.emicode.com/en/))

Item-No.	Width x Length	Packaging Unit
162550	50 mm x 25 m	36 ro.
1625100	100 mm x 25 m	18 ro.

## Cloth Installation Tape EXTRA for the fixation of carpet and CV coverings



For the use at edges when installing coverings with EXTRA-LAY®.

Also ideal for the reinforcement of seams during the installation of Dry-Fitting Mesh SOFT, as well as for the fixation of different materials on floor and wall area.

Material: High quality mesh, self-adhesive on both sides.

- Removable without residues
- Plasticizer migration resistant
- With general building inspectorate approval (DiBt - institute for Building Technology)
- EC1<sup>PLUS</sup> certified (for additional information, visit [www.emicode.com/en/](http://www.emicode.com/en/))

Item-No.	Width x Length	Packaging Unit
125035	35 mm x 50 m	48 ro.
122550	50 mm x 25 m	36 ro.
122510	100 mm x 25 m	18 ro.

## REMOVE film-forming system pre-coat, prior to bonding with EXTRA-LAY®



The specifically developed pre-coat protects the subfloor in the case of a later removal of the floor covering. Suitable subfloors: chipboards, filler as well as leveled cement floor and concrete, drywall boards, calcium sulfate screed, fiberboard, OSB and MDF.

Material: Film-forming, ready-to-use dispersion pre-coat, free of solvents.

- Enables the residue-free removal of EXTRA-LAY®
- Avoids a later subfloor renovation
- Coverage depending on subfloor, approx. 50–100 ml/m<sup>2</sup>
- Processing with a roller or pressure spray pump

Item-No.	Content	Packaging Unit
Z140425	2,5 l	4 pcs.
Z140410	10 l	2 pcs.
Z140527	Pressure spray pump PREMIUM for 5 l, up to 3 bar	1 pc.
Z140528	Pressure spray pump PREMIUM spare nozzle	1 pc.
Z140529	Pressure spray pump PREMIUM spare spray pipe	1 pc.

## FLOOR-LAY CONNECT LVT PU-underlay with self-adhesive upper side

For dry-back-LVT-coverings

High-performance product on PU-basis for the installation on mineral subfloors and preexisting floor coverings.

Self-adhesive upper side, perfectly suited for the installation of dry-back-LVT-coverings of a thickness of 2 mm and more.

This footfall sound insulation was designed especially for heavily frequented rooms.

Material: Reinforced PU-underlay with 1444 kg/m<sup>3</sup>, Equipped with dry-fitting adhesive coating and covering film on the upper side.

- Footfall sound reduction 15 dB / Room sound reduction 6 %
- Ideal for underfloor heating (R= 0,010 m<sup>2</sup> k/W)
- Extremely pressure resistant (CC = 45 kPa), shock-absorbing (RLB = 750 mm)
- Early corrections in the adhesive bed possible, room is accessible immediately after
- For heavily frequented areas



**HYBRID:**  
Dry-fitting and footfall sound insulation all in one!



★★★★ PREMIUM ★★★★★

Item-No.	Width x Length, Thickness	Packaging Unit
1926510	1000 mm x 6,5 m, 1,8 mm	130 m <sup>2</sup> (20 ro.)

# BONDING OF STAIR COVERINGS



# BONDING OF STAIR COVERINGS

STAIR ADHESIVE TAPES



## Step-FLOOR for the installation of textile and CV coverings



Recommended for the installation of materials from the following manufacturers: Anker, Dura, Girloon, HTP, etc.

Special adhesive tape for the permanent installation of CV- and textile coverings (SDR-, TR-, PES- backings) onto wooden and leveled stairs.

During the whole installation a barrier of the staircase is not necessary. No unpleasant odours develop during and after installation.

Material: Special acrylic adhesive with reinforcing polyester thread, with double-sided adhesion.

- Staircase is accessible during the installation
- Odourless and free of solvents, therefore approved both for private as well as public interiors
- Adhesive coating: 230 g/m<sup>2</sup>

Item-No.	Width x Length	Packaging Unit
131524	240 mm x 15 m	6 ro.
131550	500 mm x 15 m	6 ro.



Staircase is accessible during the installation



Installing the textile covering onto the area covered with Step-FLOOR



Full area CV-covering that is applied on primed stairs

## Step-TACspezial for the installation of rubber stair treads and linoleum



Recommended for the installation of materials from the following manufacturers: Nora, Saarfloor, linoleum of many manufacturers, etc.

Adhesive tape for the installation on wooden and leveled stairs. Suitable for rubber stair treads and rubber layer products. Due to the high adhesive coating also suitable for stair treads with structured backing.

Also perfectly usable for homogeneous PVC coverings up to 2 mm, linoleum coverings up to 2,5 mm and needle felt.

Material: Special acrylic adhesive with reinforcing polyester thread, with extremely strong, double-sided adhesion.

- Staircase is accessible during the installation
- Odourless and free of solvents, therefore approved both for private as well as public interiors
- Adhesive coating: 330 g/m<sup>2</sup>

Item-No.	Width x Length	Packaging Unit
152515	150 mm x 25 m	12 ro.
152524	240 mm x 25 m	6 ro.



Full area application of the adhesive tape



Installation of a linoleum covering



Rubber stairs on a primed surface



# FLOOR PROTECTION

PROTECTION FOILS

PROTECTION FLEECES



## teboPROTECT UV self-adhesive protection foil for textile coverings



One-sided self-adhesive protection foil for textile coverings during renovation works. The robust foil prevents the penetration of humidity, dirt and paint towards the textile flooring. Due to the UV resistance and the special glue there are no residues left when removing the foil.

For rolls with 1000 mm width, the use of the D-TACK EASY-Roller is recommended.

Material: Semi-transparent protection foil with low tack glue on the lower side and slip-resistant upper side.



- Easy to roll off because the self-adhesive side faces outwards
- Extremely durable
- Slip-resistant upper side even under humid conditions
- Highly UV-resistant
- Suitable for private and public interiors

Extra strong variant for public interiors: 100 running meters + 100 µm

Item-No.	Width x Length, Strength	Packaging Unit
215060	600 mm x 50 m, 50 µm	12 ro.
215010	1000 mm x 50 m, 50 µm	8 ro.
211010	1000 mm x 100 m, 100 µm	6 ro.

## EASY-Roller for the fast application of teboPROTECT UV and Protection Foil

High quality application tool for the fast and large-scale installation of teboPROTECT UV and protection foil up to a width of 1000 mm. In just one step, the protection foil is unrolled and pressed onto the surface.

Material: High quality, stainless materials.

- Easy handling and transport due to the removable handle
- Time-saving, wrinkle- and bubble-free application

Ideal for large areas!  
Suitable for D-TACK teboPROTECT UV and Protection Foil up to a width of 1000 mm



Item-No.	Width x Length	Packaging Unit
990010	1 m x 1,50 m	1 pc.

## Protection Foil self-adhesive on hard surfaces



Ideal for the protection of hard surfaces like tiles, laminate and parquet in the interior. Optimal application with the D-TACK EASY-roller.

Material: Robust, transparent foil (50 µm), with one-sided low adhesion.

- No tripping hazards because of full-area adhesion
- Can be removed easily
- Plasticizer migration resistant
- UV resistant
- Suitable for private and public interiors



Item-No.	Width x Length, Strength	Packaging Unit
361050 T	500 mm x 100 m, 50 µm	6 ro.
361010 T	1000 mm x 100 m, 50 µm	4 ro.

## Stair Fleece PREMIUM with two self-adhesive strips



For the protection of cantilever staircases. Also suitable for the protection of door frames, radiators, sanitary installations and window sills during renovation works.

Material: White high-quality- fleece made of sterilized cotton-/ synthetic fiber hybrid with watertight PE-foil and two adhesive strips.

- With self-adhesive strips for a safe grip
- Perfect protection without tripping hazards
- Watertight, high absorbency
- Reusable

Item-No.	Width x Length	Packaging Unit
Z602533	33 cm x 25 m	6 ro.

## Protection Fleece SAFE with self-adhesive foil on the lower side



Ideal protection fleece for the use on stairs during renovation works. Best suitable for the full-area application on hard surfaces like parquet, laminate and tiles.

Material: Slip-resistant, high absorbent, white fleece with self-adhesive, watertight foil on the lower side.

- Can be removed without residues
- Prevents leakage of water or paints, binds dirt and dust
- No tripping hazards
- Slip-resistant on flat surfaces
- Clean look due to the white fleece
- Fire classification B2 according to DIN 4102-1



Item-No.	Width x Length	Packaging Unit
Z602565	650 mm x 25 m	6 ro.
Z602510	1000 mm x 25 m	6 ro.

# PERMANENT



The premium quality of our products is supported through system warranties, and test certificates:



In cooperation with various floor covering manufacturers we develop solutions that are proven and tested in practice, permanent and easy to process. To emphasize the **high quality**, we grant a **warranty of 10 years** on the items marked with this logo.



Products are tested and certified according to the specifications of the Association for Emission-controlled Installation Materials (Gemeinschaft Emissionskontrollierte Verlegewerkstoffe, Klebstoffe und Bauprodukte e. V.) and are certified as “very low-emission”.

**For more information visit**  
[www.emicode.com/home](http://www.emicode.com/home)



The Blue Angel is the ecolabel of the federal government of Germany since 1978. Products and services that have been awarded the Blue Angel ecolabel are more environmentally-friendly than other comparable, standard products and services.

**For more information visit**  
[www.blauer-engel.de/en](http://www.blauer-engel.de/en)



Products with this logo fulfil the high requirements of the German institute for building technique (Deutsches Institut für Bautechnik, DIBt) and have received the national technical approval (allgemeine bauaufsichtliche Zulassung, abZ and the corresponding Ü-sign.

**For more information visit**  
<https://www.dibt.de/en/we-offer/approvals-et-as-and-more>

## That's why we take permanent responsibility!

---

Therefore we set our focus on products, that are designed with absolute longevity in mind.

One thing is clear: Our customers can only satisfy their clients when delivering the best results. This requires the use of products of prime quality.

Our goal is to work together with our customers on a long-term basis.




# PRIVATE LABEL - OUR PRODUCTS IN YOUR DESIGN

Most of our adhesive tapes are available in custom widths and / or with your own design.

## PRIVATE LABEL IN 8 EASY STEPS:

- 1.** Approach your contact person at D-TACK to discuss availability and first details.
- 2.** D-TACK designs the layout-drafts according to your corporate design-guidelines
- 3.** Confirmation of those drafts by you or your employees
- 4.** Printing of the labels in high quality and colour fastness
- 5.** Labeling of the ordered products with your custom labels
- 6.** Order picking of your goods for a delivery on time
- 7.** Delivery of the goods to your preferred delivery address
- 8.** Satisfied customers!

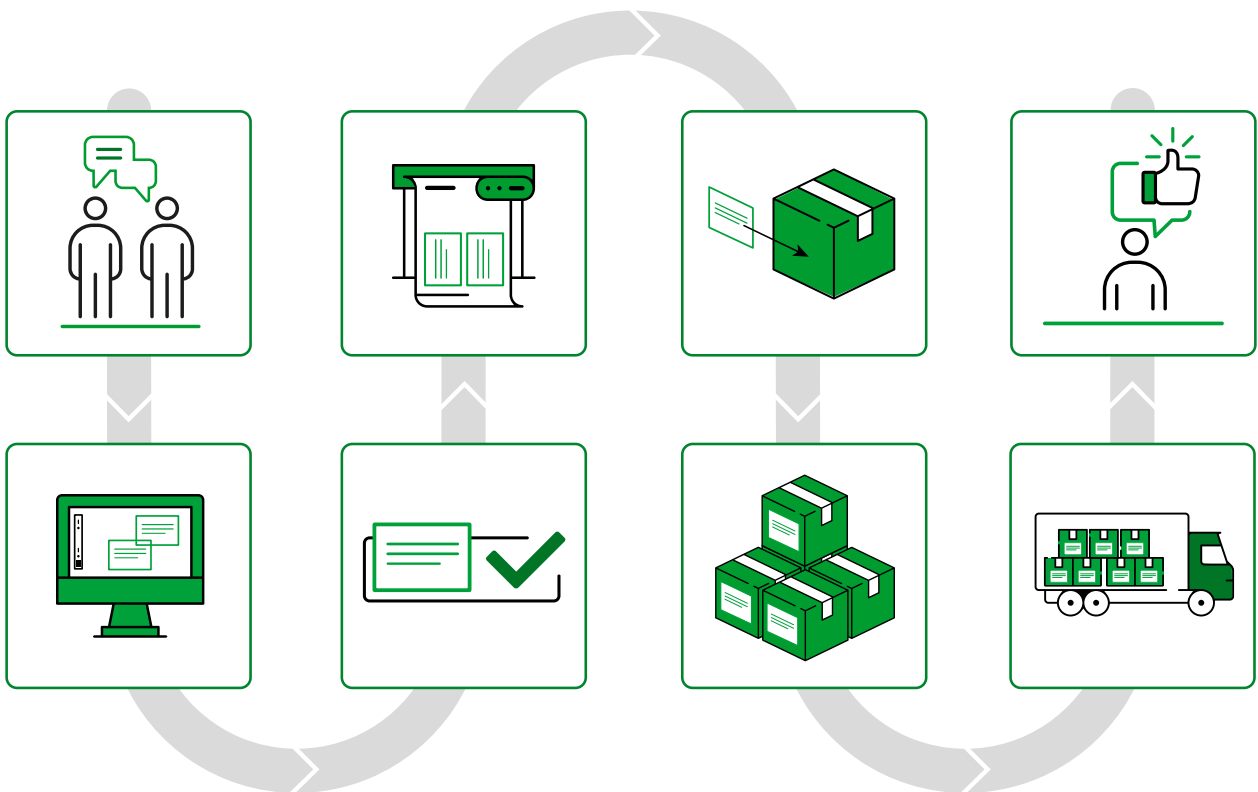

**IN ADDITION TO THE PRODUCTS SHOWN IN THIS BROCHURE,** WE HAVE MANY OTHER ITEMS IN THE FOLLOWING AREAS:

**FLOORING  
ABRASIVES**

**SAFETY +  
PROTECTION  
AT WORK**

**PAINTING / MASKING**

**GROUTING +  
MOUNTING**

**CUTTING +  
SEPARATING**

**FLOORING  
INSTALLERS TOOLS**

**PAINTERS TOOLS**

**PROFESSIONAL  
WASTE DISPOSAL  
+ CLEANING**

**CONSTRUCTION  
SITE EQUIPMENT**

If you are interested in any of these product lines, please do not hesitate to contact your D-TACK contact person, either via phone or E-Mail.

**Tel.: +49 (0) 73 61 / 63 37-262**

**E-Mail: [sales@d-tack.com](mailto:sales@d-tack.com)**

**FURTHERMORE WE OFFER  
FULL PRODUCT CATALOGUES  
FOR THE FOLLOWING BRANCHES:**




**ROOFERS AND  
CARPENTERS**



**PAINTERS AND  
PLASTERERS**



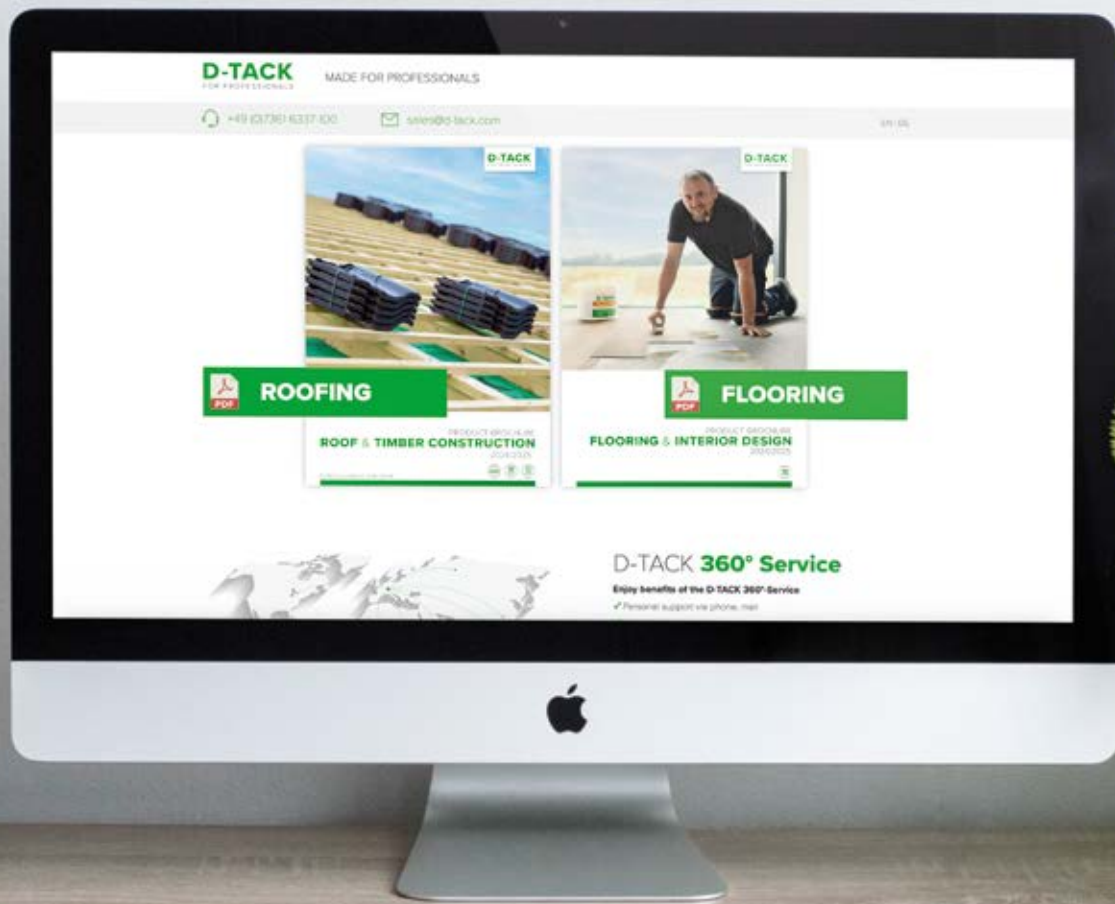

VISIT US ONLINE!

**WWW.D-TACK.COM**

## **D-TACK**

FOR PROFESSIONALS

Handwerkerstr. 1  
73460 Hüttlingen / Germany  
Tel: +49 (0)7361 6337-100  
Fax: +49 (0)7361 6337-101

E-Mail: [sales@d-tack.com](mailto:sales@d-tack.com)  
Web: [www.d-tack.com](http://www.d-tack.com)

## **SOCIAL MEDIA**

News & glimpses behind the scenes of D-TACK on our social media pages.

