

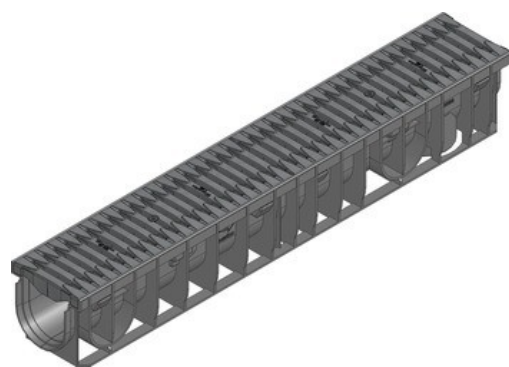


RECYFIX®PRO 100

RECYFIX®PRO 100, class C 250, Type 01 with FIBRETEC design slotted grating in the colour Black, SW 9 mm, locked

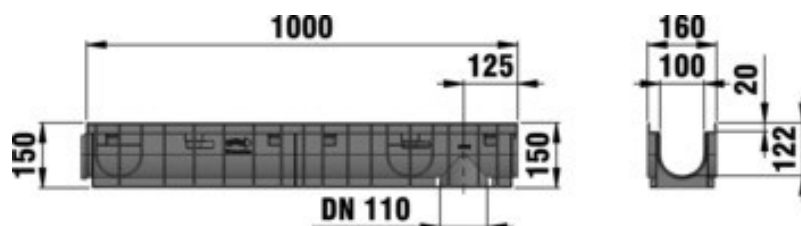

C 250



■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	160	150	4,595	372	92	20	47055

■ Product description:

RECYFIX PRO 100 Type 01 - channel made of modified PP, with integrated angle housing, with vertical connection possibility DN/OD 110, with FIBRETEC slotted grating, slot width 9 mm, black, with horizontal thrust resistance and locking device, loading capacity from A 15 - C 250 according to EN 1433, L/W/H 1000x160x150 mm, item no. 47055

■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** reinforced Polyamide

■ Type acc. DIN EN 1433:


M

■ Set of rules:

DIN 19580/EN 1433

■ Application areas:

- Railway platform
- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones
- Gardening and landscaping



- Multi storey car parks
- Market squares, markets
- Public areas and squares
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Access drives private

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!