










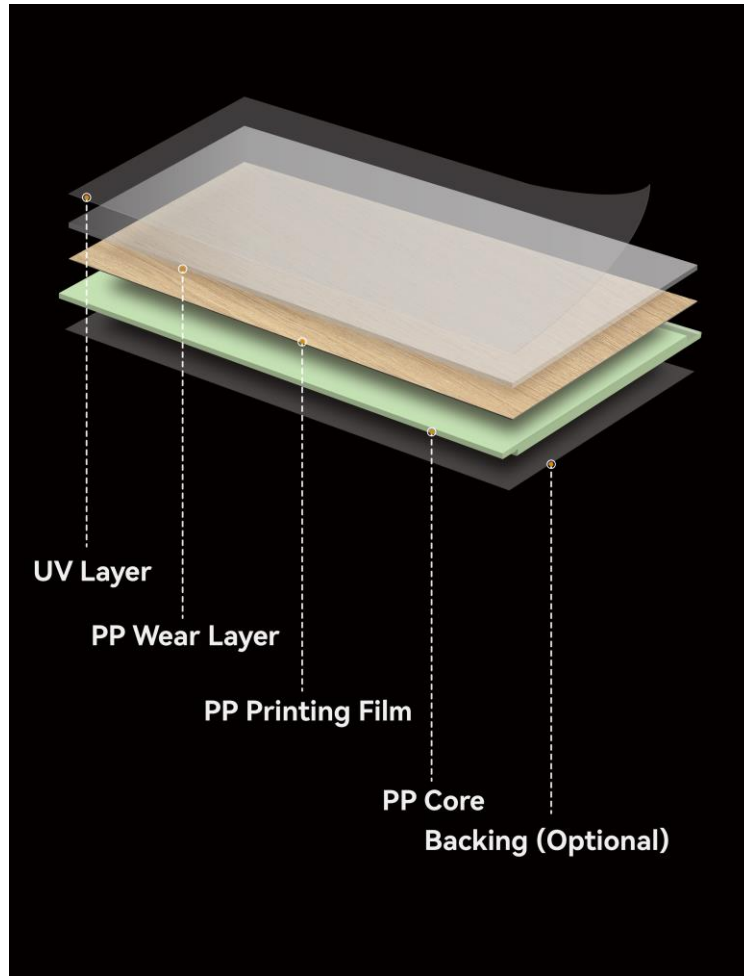

HALEAD PP FLOORING

HALEAD
海利得

Stock Code: 002206



◆ Product Advantages:

-  Zero Formaldehyde, non-Phthalate
-  Recyclable eco-friendly product
-  Not react with water, detergents, acids, or alkali
-  Higher Wear Resistant
-  Bfl-S1/Cf1-S1 fire retardance
-  Resistant to cracking, stress, impact
-  water-proof and anti-slip
-  relatively light density



Innovative Product

PP Flooring Specification



◆ PP Dry Back:

PP flooring is an innovative flooring that is 100% PVC free it contains neither chlorine nor plasticizer.



◆ PP Click

Since for special property of PP material, it's wearing resistance going toward to next level .



Innovative Product

PP Flooring Technical data



Stock Code: 002206

Name	Test Item	Requirement	Specification PP 2.5mm	Specification PP 6.0mm
Length	ISO 24342	±0.5mm	0.10mm	0.30mm
Width	ISO 24342	±0.12mm	0.08mm	0.10mm
Tatol Thickness	ISO 24346	±0.15mm	0.08mm	0.10mm
Wear Layer thickness	EN ISO 24340	N+13%, -10%	7%	8%
Abrasion Resisitance	EN 13329	≥4000r	4500	4500
Residual Indentation	ISO 24343-1	≤0.1mm	0.05mm	0.08mm
Dimensional Stability/Shrinkage	EN ISO 23999	Length≤0.25% Width≤0.25%	Length:0.06% Width:0.05%	Length:0.08% Width:0.07%
Dimensional Stability/Curling	EN ISO 23999	≤2mm	0.8mm	1.1mm
Anti-Microscratch	EN 16094 B	≤MSR-B2	MSR-B2	MSR-B2
Slip Resisitance	DIN 51130	≥R9	R10	R10
Colour fastess to light	ISO 105-B02:Method 3A	≥6 grade	6	6
Castor Chair Resistance(Type W)	EN ISO 4918	No damage	25000r, No damage	25000r, No damage