

Non-sag fairing coat *light*

STL 39

Fields of application



- For indoor use.
- Prior to the installation of
 - textile flooring and resilient flooring
 - parquet flooring or laminate flooring to be bonded.
- Cementitious fairing coat for leveling hollows, holes, irregular substrates and for producing inclined surfaces on
 - cementitious substrates
 - calcium sulfate screeds
 - magnesite screeds
 - mastic asphalt screeds
 - particle boards
- wooden floors
- ceramic tiles
- coatings.
- For repairing treads and risers.
- For layer thickness from 0.5 to 50 mm.
- Suitable for
 - underfloor heating
 - exposure to chair castors (from 1 mm minimum layer thickness).
- Suitable as filling base coat on timber floors, particle boards and ceramic tiles when adding PCI VG 2 multi-use primer during the mixing process.

Features and benefits

- Very low emissions PLUS, GEV-EMICODE EC 1 PLUS.
- Awarded the environmental label "Blauer Engel" due to low emissions (RAL UZ 113).
- Low in chromates; Giscode ZP 1.
- Creamy consistency, non-sag properties.
- Fast curing, grindable and able to be covered after approx. 1 hour.
- High yield, low consumption.

Packaging size

- 20 kg heavy duty PE lined paper bag
stock no. 4220/5

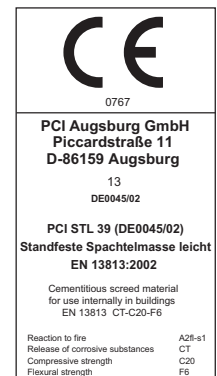

www.blauer-engel.de/uz113



Technical data

Material

Material base	special cement, mineral fillers, redispersible polymer powder, additives
Components	single component
Consistency	powder
Color	grey
Shelf life	min. 6 months; store dry, no permanent storage over +30°C. Be sure that open sacks are tightly sealed, use up within a short period.

Application

Consumption	approx. 1.2 kg of powder per m ² and mm layer thickness
Layer thickness	0.5 to 50 mm
Ambient and substrate temperature	+10°C to +25°C
Mixing ratio	20 kg of PCI STL 39 + approx. 6.2 l of water For partial quantities: 1 kg of PCI STL 39 + approx. 310 ml of water for mechanical mixing and/or 360 ml for manual mixing
Consistency	creamy
Processing time*	approx. 15 minutes
Curing time*	
– walkable after	approx. 45 minutes
– grindable after	approx. 1 hour
– ready to take vapor-permeable flooring after	approx. 1 hour
– ready to take parquet flooring or laminate flooring after	approx. 2 hours
– ready to take vapor-inhibiting flooring after	approx. 2 hours
Suitable for exposure to chair castors	from 1 mm minimum layer thickness

* At +23°C and 50% relative humidity. Higher temperatures reduce, lower temperatures increase the times given. Higher humidity increases the times given.

Preparation of substrate

- The requirements in accordance with the German standards DIN 18365 and/or DIN 18356 apply.
- The substrate must be clean, dry, structurally sound, able to bear weight, free from oil and grease, old paint and other residues which could impair adhesion.
- Remove heavy contamination and residues and/or surfaces which could impair adhesion by mechanical means (shotblasting, grinding).
- Fill existing cracks with suitable PCI cast resins.
- The tensile strength of the prepared surface must not fall below an average of 1.0 N/mm² when subsequently sulfate parquet flooring or laminate flooring.

Priming

- Prime substrates with PCI VG 2 multi-use primer. Follow drying times of primer! See technical data sheets for detailed information.
- PCI STL 39 can be applied to cementitious substrates without priming.

Application procedure of PCI STL 39

- 1 Fill cold gauging water in a clean mixing bucket, add PCI STL 39 and mix until lump free using a suitable paddle (e.g. from Collomix). Small quantities can also be mixed by hand, e.g. using a trowel.
- 2 Apply PCI STL 39 to the dry primer and spread to the required layer thickness. **It is not necessary to add aggregates to the fairing coat within the given range of layer thickness!**

Please note

- In case of increased residual moisture in cementitious substrates use PCI VG 5 PU primer or PCI Epoxigrund 390 or PCI Epoxigrund Rapid and contact the PCI technical help-line.
 - Only mix as much material as can be applied within the given processing time.
 - Never add water or moist PCI STL 39 to reconstitute a mortar mix which has already begun to set.
 - It is important to adhere to the indicated amount of gauging water when mixing PCI STL 39. Additives are not allowed.
 - Manual mixing requires a higher amount of water compared to mechanical mixing.
 - If PCI STL 39 is to be covered with a cementitious floor leveler it must be applied while still moist. Prime with PCI VG 2 multi-use primer if the first layer has already cured.
 - Suitable tools are available from e.g. Collomix GmbH, Horchstraße 2, 85080 Gaimersheim/Germany, www.collomix.de.
 - Clean tools, machinery and mixing equipment with water immediately after use; the cured product can no longer be removed with water.
 - PCI STL 39 mixed with PCI VG 2 can be used as fast setting, flexible and filling base coat.
- Field of application: For filling joints or small voids and simultaneously priming or smoothing wooden floors, particle boards and ceramic tiles before applying floor levelers and subsequently bonding textile floorings and resilient floorings.
- Mixing ratio: As gauging water for PCI STL 39: dilute 1 part of PCI VG 2 with 2 parts of water. Instead of gauging water, fill mixing water in a clean bucket, add PCI STL 39 and mix until lump free.
- Processing: Apply mixed material to the prepared substrate using a trowel, work into joints or voids and scrape off right away to produce a smooth surface (layer thickness up to 1 mm). Be sure that joints or voids are filled flush with the surface. Processing time approx. 12 minutes (at +23°C and 50% rel. humidity). A floor leveler, e.g. PCI HSP 34, can be applied as soon as the primer coat is walkable (approx. 40 minutes).

Declaration of Performance

The Declaration of Performance can be downloaded as pdf file under www.pci-augsburg.eu/dop.

Information on the safe use

Product contains cement. Causes serious eye damage. Causes skin irritation.

Keep out of reach of children. Store cool and dry. Ensure thorough ventilation during application and drying. Avoid eating, drinking and smoking while processing the product. Wear protective goggles, waterproof, robust gloves and long trousers when processing. IF IN EYES OR ON SKIN:

Rinse cautiously with water. IF IN EYES: Get immediate medical advice/attention. The longer fresh material remains on your skin, the greater the risk of serious skin damage. Take off contaminated clothing and wash it before reuse. Keep children away from fresh material. Clean tools with water immediately after use. Do not empty into drains, bodies of water or ground. Reseal open units tightly

immediately after use. Only empty containers for recycling. Cured material residues can be disposed of as household waste. Uncured material must be taken to the hazardous waste disposal point. The European waste code numbers (EAK) can be requested from the manufacturer.

Giscode ZP 1

For further information: see PCI Material Safety Data Sheet.

Disposal of product residues

Do not empty product/residues of material into drains, bodies of water or ground. Mix residues of powder with water and allow to cure. Cured material

residues can be disposed of as construction waste (European waste disposal number 170107).

Disposal of emptied PCI sales packaging

Only completely emptied containers should be returned for recycling. PCI participates in an area-wide waste disposal system for sales packaging completely emptied. DSD – Duales System Deutschland (Dual System Germany, contract number 1357509) is our partner for waste disposal. PCI sales packaging completely emptied

can be disposed of via DSD in accordance with the symbol printed on the packaging. For further information on disposal see the safety and environmental information in the price list and also on the Internet at <http://www.pci-augsburg.eu/en/services/disposal-instructions.html>.

Services for architects and designers

Consultations at the workplace, supplementary information, testing certificates and sample descriptions can

be requested from professional advisors and at the company headquarters.

The working conditions on construction sites and the areas of application of our products are highly diverse. In the technical data sheets, we can only give general instructions for the use of our products. These are in accordance with the information currently available to us. Architects, engineers and the users of our products are under an obligation to verify the suitability of our products and the feasibility of using them for their specific applications. For applications not explicitly referred to under "Area of applications" in the technical data sheet, architects, engineers and users of our products are under an obligation to obtain technical advice from PCI. In the event that the product is used outside the scope of applications defined in the technical data sheet without obtaining the advice of PCI, the user of the product will be liable for any loss or damage arising as a result of the use of the product. All the descriptions, drawings, photographs, data, conditions, weights, etc. stated in the technical data sheet may be changed without notice and do not represent the agreed properties of the product. Recipients of our products are under an obligation to comply with any proprietary rights and any applicable laws and regulations under their own responsibility. If trade names used by other companies are referred to in this technical data sheet, such references do not represent a recommendation for the use of such products and do not exclude the use of other comparable products. The information which we provide only describes the characteristics of our products and services and does not represent any guarantee. A guarantee of specific properties or the fitness of the product for a specific purpose cannot be derived from the information which we provide. We will not be liable for any incomplete or incorrect information in our information material except in the case of wilful act or omission or gross negligence. This disclaimer does not affect any claims under the Produkthaftungsgesetz (Product Liability Act).



PCI Augsburg GmbH
 Piccardstr. 11 · 86159 Augsburg
 Tel. +49 (8 21) 59 01-0
 Fax +49 (8 21) 59 01-372
www.pci-augsburg.de



certified quality management system

PCI STL 39,
 Last revised in November 2021
 (German edition February 2021)
 This version will become invalid immediately upon the publication of a later version; you will always find the latest version on the Internet at www.pci-augsburg.de.