

Skirting tape thread scrim for PVC-free skirtings

# UZIN GOMAN 50

Dry adhesive for materials made of rubber, linoleum and chlorine-free materials for flooring strips, cove skirting, support profiles and stair angles

**MAIN APPLICATION FIELD:**

- ▶ Rubber flooring strips
- ▶ Coved rubber skirting
- ▶ Rubber skirting (e.g. nora S 1023 U)
- ▶ Rubber stair profiles
- ▶ Linoleum flooring strips
- ▶ Pre-made coved linoleum skirting
- ▶ Flooring strips made of PVC-free flooring (e.g. Enomer or PUR flooring)
- ▶ Skirting made of PVC-free materials

**SUITABLE ON / FOR:**

- ▶ Plaster
- ▶ Brickwork
- ▶ Metal (untreated)
- ▶ Painted surfaces
- ▶ Plastics
- ▶ Wood
- ▶ Concrete
- ▶ Ceramics
- ▶ Gypsum (primed)
- ▶ Wallpaper\*
- ▶ Levelling compound (primed)

**Note:** Obtain technical advice for additional combinations of floor covering and skirtings

\*see note for preparation



**PRODUCT BENEFITS/FEATURES:**

Special acrylic adhesive tape for the fast and secure installation of rubber skirting boards. Goman 50 allows quick and clean working without solvents. For interior applications.

- ▶ avoids use of solvent based contact adhesives
- ▶ no prior fitting and priming

**TECHNICAL DATA:**

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Packaging                       | carton                            |
| Pack size                       | 4 rolls or 24 rolls               |
| Shelf life                      | min. 24 months                    |
| Color                           | transparent with green laid scrim |
| Open time                       | unlimited                         |
| Setting time / cure time        | none                              |
| Ready for foot traffic          | immediately after installation    |
| Roll width                      | 50 mm                             |
| Roll length                     | 50 m                              |
| Minimum application temperature | 15 ° C at ground level            |
| Loadable                        | immediately after installation    |
| Joint sealing                   | immediately after installation    |

\*At 20 °C and 65% relative humidity.



for <span style="font-size: 2em; color: #90EE90;">PVC-free coverings or skirting

ON >span style="font-size: 2em; color: #90EE90;">Substrates up to 1 mm structure

## SUBSTRATE PREPARATION:

- ▶ The substrate must be permanently dry, hard, load-bearing, flat, free from grease, dust and silicon, in accordance with the respective national standards (EN, DIN, VOB, OE, SIA).
- ▶ Wallpaper must be firmly bonded or cut / removed for the height covered by the skirting.
- ▶ Bind dust with a solvent-free primer (e. g. UZIN PE 260).
- ▶ For the best adhesion clean the rubber skirting board with water and allow to dry.
- ▶ Ensure the floor covering and Goman are free from con-tortions before installing. Allow the floor covering (and Goman) to acclimatise sufficiently according to the man-ufacturers recommendations.

## APPLICATION:


1)

- ▶ Put the adhesive-repellent paper washer on the dispensing plate
- ▶ Place Goman 50 on the paper washer
- ▶ With the help of the dispensing plater, apply Goman 50 to the wall, 4 mm from the floor covering
- ▶ Rub down well



2)

- ▶ Pull off the protective paper in stages up to approx. 20 cm before the corner
- ▶ Fit the rubber skirting up to approx. 20 cm before the corner without stressing and twisting

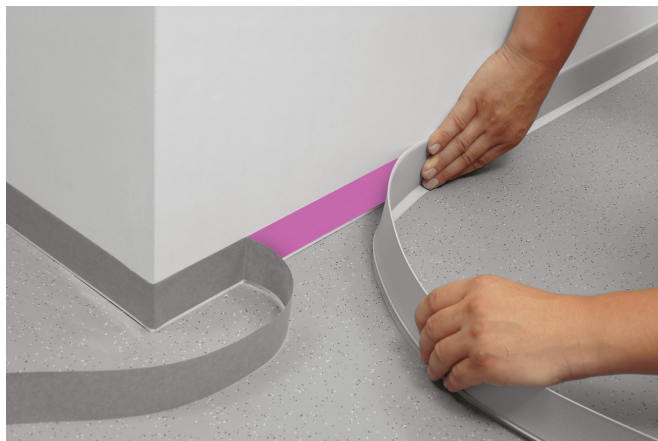

3)

- ▶ Immediately after installing, tap along the rubber skirting board with a rubber hammer -> doubles the adhesive strength




4)

- ▶ Heat the rear sides of the inner / outer corners of the rubber skirting board and pre-shape them
- ▶ Remove the protective paper, fit the rubber skirting board without twisting and tap along with the rubber hammer



5)

- ▶ Bind joints together using instant glue, avoiding any open joints

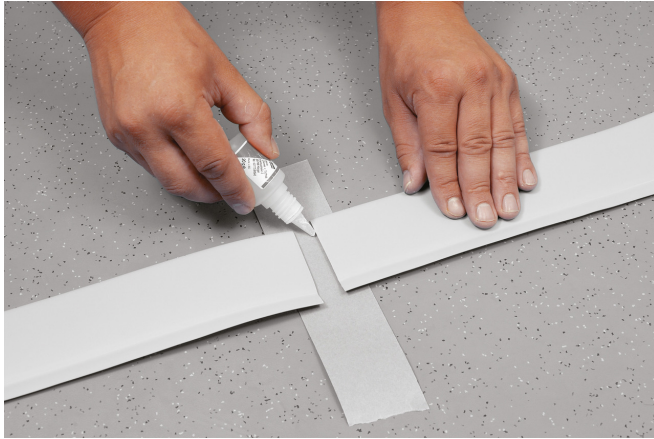

## DISPOSAL:

Empty shells and the cardboard packaging can be recycled. Material remnants can be disposed of as household waste.

## IMPORTANT NOTES:

### Storage:

Store on protected cut area, in a dry, cool area without exposure to direct sunlight.

### UZIN grants a 5-year warranty for all properties claimed in the installation instructions.

- ▶ Follow the generally acknowledged rules of the trade and of technology for the installation of floor covering of the respective applicable standards (EN, DIN, VOB, OE, SIA). In all cases, some adhesion tests must be carried out on-site before carrying out the installation.

The warranty becomes void if:

- ▶ the front and back of rubber profiles were not cleaned with water before installing.
- ▶ unusual influences, and in particular those of a chemical or mechanical nature, affect the product.
- ▶ used or processed differently than stated in the installation instructions.
- ▶ moisture affects Goman 50.
- ▶ installation was performed below 15 °C (on the wall).
- ▶ Goman is used in areas with increased humidity or thermal exposures (e. g. conservatories).

## SEALS OF QUALITY & ECOLABELS:

- ▶ EMICODE EC 1 PLUS / Very low emission
- ▶ DE-UZ 113 / Environmentally friendly because of low emissions

## COMPOSITION:

Acrylic copolymers, wetting and defoaming agents, laid scrim, paper.

## PROTECTION OF THE WORKPLACE AND THE ENVIRONMENT:

The product does not require any special labour protection measures. For reasons of working hygiene, we recommend avoiding eating, drinking and smoking during processing of this product. Store out of the reach of children. For more information refer to [www.uzin.com](http://www.uzin.com) or contact +49 731 4097-0.