Xerox[®] VersaLink[®] B625 Multifunction Printer






Xerox® VersaLink® B625 Multifunction Printer is built on Xerox® ConnectKey® Technology. For more information, go to **ConnectKey.com**.

System Specification	
Speed ¹	
Black-and-White	Up to 65 ppm
Monthly Duty Cycle ²	Up to 300,000 pages
Hard Drive/Processor/ Memory	TBD/ Optional : 500+ GB HDD/Intel Atom® Quad Core 1.91 GHz ARM Quad Core 1.2GHz /4 GB system memory
Connectivity	Ethernet 10/100/1000 Base-T, High-speed USB 2.0 direct print, Optional: WiFi/WiFi Direct with Xerox® Duar Band Wireless Kit, Bluetooth (iBeacon)
Controller Features	Unified Address Book, Remote Control Panel, Configuration Cloning, Fleet Orchestrator, Configuration Watchdog
Copy and Print	
Copy and Print Resolution	Copy: Up to 600 x 600 dpi; Print: Up to 1200 x 1200 dpi
First-Print-Out Time (as fast as)	TBD seconds black-and-white
First-Copy-Out Time (as fast as) (from platen/ warmed-up state)	BD seconds black-and-white
Page Description Language	Adobe® PostScript® 3™, Adobe® PDF, PCL® 5c/PCL® 6
Print Features	Print from USB, Print from Cloud Repositories (Dropbox, OneDrive, and Google Drive), Encrypted Secure Print, Xerox® WorkCentre® Earth Smart, Job Identification, Booklet Layout, Store and Recall Driver Settings, Bi-directional Real-time Status, Scaling, Job Monitoring, Application Defaults, Two-sided Printing (as default), Hold All Jobs, Print Around, Print on Alternate Paper; Optional: Print from and Scan to Xerox® DocuShare® Go content management
Mobile and Cloud Ready	
Universal Print Ready	Universal Print is a cloud print service, available to Microsoft 365 subscribers. It removes the need for on-site print servers and leverages the built-in drivers included in the Windows 10 and 11 PCs. You can enjoy the benefits of cloud hosting with a driverless setup for all Windows 10 and 11 clients.
Mobile Connectivity	Optional: Wi-Fi Direct, Wi-Fi (802.11 b/g/n/ac), (Beacon (Bluetooth) for AirPrint Discovery)
Mobile Printing	Mopria® Print, Apple AirPrint, Xerox® Print Service (Android), @PrintByXerox App; Optional: Xerox® Workplace App (iOS/Android), iBeacon (Bluetooth) for AirPrint Discovery
Mobile Scanning	Mopria® Scan, Apple AirPrint Scan, Optional: Xerox® Workplace Mobile App (iOS/Android) Optional Scan to Microsoft OneDrive, Google Drive and DropBox
Mobile Apps and Xerox App Gallery	Automate everyday processes with apps that translate, redact, eSign, personalize, print, convert, route, collaborate, and communicate. Visit xerox.com/WorkplaceApps to find apps by industry or workflow. Software and services: Xerox® DocuShare® (xerox.com/ecm), XMPie® (xerox.com/XMPie), Xerox® Workplace Solutions (xerox.com/WorkplaceSolutions)
Xerox® Workplace Central Platform	One-platform consistency for seamless productivity across computers, mobile devices and printers. With Workflow Central's ever-expanding suite of cloud-based workflows you can change documents into audio files for easy listening, convert PDF or image files to popular Microsoft formats for shareability with a wider audience, turn handwriting into legible, editable and shareable text, translate to/from over 40 different languages, and automatically redact Personal Identifiable Information using set words or phrases

Xerox® Workplace Suite and Xerox® Workplace Cloud	Optional: Xerox® Workplace Suite is a modular set of workflows designed to save customers time and money by providing effective control over their print fleet, while enabling worker productivity and mobility through a set of robust workflows. Xerox enables ultimate customer flexibility by offering these capabilities in both an on-premises server version (Workplace Suite) and with a cloud based-version (Workplace Cloud) of this solution
Cloud Identity Provider (IdP) Integration	Use your desktop, laptop, or mobile login credentials to log in to your VersaLink® MFPs with direct connections to popular cloud identity providers Okta, Ping Identity, and Microsoft® Azure
Scan	
Standard Features	Destinations: Scan to USB/Email/Network SFTP, SMB, HTTP, HTTPS, FTP destinations; File Formats: PDF, PDF/A, JPEG, TIFF; Convenience Features: Scan to Home, Single/Multi-Page PDF/TIFF, Password-protected PDF, Unified Address Book, Scan to Folder, 1-Touch Apps, TWAIN Support, Touchless Workflow Accelerators
Optional Features	Scan to Cloud Repositories (Dropbox, OneDrive, and Google Drive). Xerox® Scanning App for DocuShare®, other solutions available through various Xerox® Business Innovation Partners at xerox.com/Software-Solutions, Print from and Scan to Xerox® DocuShare® Go content management
Fax	
Standard Features	Fax Build Job, Network Server Fax Enablement, Fax Build Job, Secure Fax Receive, Fax Forward to server
Optional Features	Walk-up Fax (one-line option available; includes LAN Fax, Direct Fax, Fax Forward to Email, or SMB Share)
Security	
Standard Features	802.1x, IPsec, HTTPS, SFTP and Encrypted Email, Firmware Verification, LogRhythm SIEM, Splunk SIEM, Network Authentication, SNMPv3, SHA-256 Hash Message Authentication, TLS1.1/1.2/1.3, Security Certificates utilizing ECDSA, Automatic Self-signed Certificate, Cisco® Identity Services Engine (ISE) integration, Local Authentication (Internal Database), FIPS 140 User Access and Internal Firewall, Port/IP/Domain Filtering, Audit Log, Access Control, User Permissions, Configuration Watchdog, TPM, Trusted Boot, AES 256-bit, FIPS 140, Job Level Encryption via HTTPS and Drivers, Signed Email, Common Criteria Certification, Encrypted Secure Print, Immediate Image Overwrite for hard disks and Secure Erase for SSDs
Optional Features	Smart Card Enablement Kit (CAC/PIV/.NET) ³ , Xerox [®] Integrated RFID Card Reader, Hard Disk (AES 256-bit, FIPS 140) with multi-pass Image Overwrite ⁹ , Xerox [®] Workplace Cloud/Suite Print Management and Content Security; learn more at xerox.com/WorkplaceSolutions
Print Management	
Standard Features	Xerox® Standard Accounting Feature (Copy, Print, Scan, Fax, Email), Network Accounting Enablement
Optional Features	Xerox® Workplace Cloud/Suite, other network accounting solutions available through various Xerox® Business Innovation Partners. Xerox® Virtual Print Management Service; learn more at xerox.com/PrintManagement

Features and Accessories





The intuitive, tablet-like, tiltable touch screen allows you to personalize your experience to get more done in fewer taps. Gain access to 100+ productivity apps through the Xerox App Gallery.

The 100 Sheet Bypass Tray handles media sizes from 76 x 127 mm to 216 x 356 mm, SEF.



OPTIONAL PAPER FEEDING



550-sheet Tray

Add up to 3 additional 550-sheet trays for a total paper capacity of 2,300 pages.







2,100-sheet Tray

Add up to two optional 550-sheet trays along with one optional 2,100-Sheet tray.



OPTIONAL ACCESSORIES

The Caster Base allows for easy moving of floor-standing configurations.



Adjustable Stand



Printer Stand



XEROX® EASY ASSIST APP

With businesses moving to a more flexible work environment, workers need the right technology in place to keep productive and get back to what really matters. Xerox Easy Assist App allows you to easily and securely manage $your\ device\ on\ the\ go\ right\ from\ your\ mobile\ phone,\ with\ real-time\ monitoring\ of\ printer\ performance\ and\ instant$ access to self-support services - all without the need for any IT support. Learn more at xerox.com/EasyAssist.



Device Specification	Device Specification	
Control Panel Languages	US English, International English, International French, Italian, German, International Spanish, Dutch, Brazilian Portuguese, Swedish, Norwegian, Danish, Finnish, Turkish, Greek, Russian, Czech, Polish, Hungarian, Romanian, Catalan, Arabic, Croatian, Ukranian	
Accessories		
Optional	Convenience Stapler Smart Card Enablement Kit3 Scan To Cloud Enablement Kit Unicode Font Kit Walk up Fax (One-line option, includes LAN Fax) Wi-Fi/Wi-Fi Direct (Beacon (for AirPrint Discovery) with Dual Band Wireless + Bluetooth kit 500GB HDD	
Electrical Requirements		
North America	Voltage: 110-127 VAC +/-10% Frequency: 50/60Hz +/- 3 %, 10A	
Europe	Voltage: 220-240 VAC +/-10% (Frequency: 50/60Hz +/- 3 %, 5A)	
Power Consumption		
Running (Average)	(115V: 8.4A, 110-127V) (230V: 4.03A, 220-240V)	
Standby Mode	(115V: 32 watts) (230V: 32 watts)	
Auto Off/Sleep Mode	(115V: 1.2 watts) (230V: 1.2 watts) ((Default time to sleep mode = 15 minutes))	
Warm-up (from Off)	As fast as 69.4 seconds	
Recovery from Sleep	As fast as TBD seconds	
Operating Environment		
Required Temperature Range	(50 to 90°F/ 10 to 32.2°C)	
Required Relative Humidity	15 to 80% RH	
Sound Power Levels	Operating: 7 db(A) or less Standby: 3 db(A) or less	
Dimensions and Weight	Dimensions and Weight	
(Base Configuration)	Width: 22.0 in/558.8 mm (Depth: 22.8 in/578.4 mm) (Height: 29.1 in/739.1 mm) (Weight: 97.2 lb/44.1 kg)	
System Certifications/Regul	atory Compliance	
Certifications	To view the latest list of certifications, go to xerox.com/OfficeCertifications	

Paper Handling	
Duplex Automatic Document Feeder (DADF)	
Capacity ⁴	100 sheets
Speed (Up to)	Letter: 75 ppm simplex, 150 ppm duplex A4: 72 ppm simplex, 144 ppm duplex
Paper Sizes Sensed	4.13 x 5.83 in to 8.5 x 14 in/105 x148 mm to 215.9 x 355.6 mm
Weights	14 to 32 lb bond/52 to 120 gsm
Bypass Tray (Standard)	
Capacity ⁴	100 sheets
Sizes	Custom Sizes: 3.9 x 7.5 in to 8.5 x 14 in/98.4 x 191 mm to 216 x 356 mm
Weights	16 to 47 lb bond//60 to 176 gsm
Media Types	Bond Card Stock Custom Envelopes Glossy Card Stock Hole Punched Labels Letterhead Lightweight Lightweight Card Stock Lightweight Glossy Card Stock Plain Preprinted Recycled
Trays 1 (Standard)	
Capacity ⁴	550 sheets
Sizes	Tray 1: Custom Sizes: 3.9 x 7.5 in to 8.5 x 14 in/98.4 x 191 mm to 216 x 356 mm
Weights	16 to 47 lb bond/60 to 176 gsm
Mediα Types	Bond Card Stock Custom Envelopes Glossy Card Stock Hole Punched Labels Letterhead Lightweight Lightweight Card Stock Lightweight Glossy Card Stock Plain Preprinted Recycled

Paper Handling (continued)	
Additional Trays (Optional)	
Capacity ⁴	550-sheet Tray: Add up to 3 additional 550-sheet trays 2,100-sheet Tray: Add up to two optional 550-sheet trays along with one optional 2,100-sheet tray
Sizes	3.9 x 7.5 in to 8.5 x 14 in/98.4 x 191 mm to 216 x 356 mm
Weights	16 to 47 lb bond/60 to 176 gsm
Media Types	Bond Card Stock Custom Envelopes Glossy Card Stock Hole Punched Labels Letterhead Lightweight Lightweight Card Stock Lightweight Glossy Card Stock Plain Preprinted Recycled
Total Capacity	
Device Total Capacity ⁴	Base Model: 650 sheets 550-sheet Tray: Add up to 3 additional 550 sheets trays for each tray module 2,100-sheet Tray: Add up to two optional 550-sheet trays along with one optional 2,100-sheet tray Max (with 3 optional trays) = 330

Сору	
First-Copy-Out Time (from platen/warmed up/ Black-and-White)	As fast as TBD seconds
Sides (input-output)	1-1, 1-2, 2-2, 2-1
Quantity	1 to 9,999
Resolution (max)	Up to 600 x 600 dpi
Reduction/Enlargement	Variable zoom from 25% to 400% in 1% increments
Concurrency	Program-ahead to allow job to be queued while initial job is processed (Copy, Print, Fax, and Scan)
Copy Features	Annotation and Bates™ stamping (with font size adjustment) Authentication for Services Auto Paper Select Auto Reduction & Enlargement (to fit selected paper size) Auto Tray Switching Automatic 2-sided/Duplex Booklet Creation Build Job (Enables page-level programming) Build Job is supported for all Copy (Productivity Kit is required) and ScanTo/Email/Workflow Scanning/Server Fax/Embedded Fax (Productivity Kit is not required) Collation Covers (Front only, front and back, back only, printed inside and out: Blank or Printed) Edge Erase Features Help (Intuitive text and graphic descriptions) ID Card Copy Image Quality Adjustments Image Shift (with Auto Center option) Invert Image (negative or mirror image) Large Job Interrupt Multi-up (up to 15 columns by 15 rows) Sample Set Save Job Settings Touchless Workflow Accelerators

Print		
Resolution (up to)	1200 x 1200 dpi	
Print Features	Application Defaults Banner Sheet Enable/Disable Booklet Layout Cover Selection Delay Print (specific time) User Permissions Fit to New Paper Size Hold All Jobs Image Options (Resolution (Enhanced, High)) Job Identification (Print ID or Banner, Print ID in margins on first page only or all pages) LAN Fax (requires optional Fax Kit) Layout/Watermark N-up (up to 16 pages per sheet) Paper Selection by Attribute Sample Set Print From Cloud Repositories (Dropbox, OneDrive, and Google Drive) Saved Job Secure Print with Timed Deletion Special Pages (exception page programming: covers, inserts, exception pages) Store and Recall Driver Settings Sustainability Features (Xerox® Earth Smart Settings, Duplex, N-up, Turn-off Banner and Print ID, Smart Sample Set, Hold All Jobs) Two-sided Printing (as default)	
Print from USB	Allows walk-up printing from Type A USB port on front panel Supports direct printing from computer via Type B USB port Supported file formats: PDF, JPEG, TIFF, PS, PCL	
Operating Systems	Windows Server 2008 SP2 (32- and 64-bit) Windows Server 2012 and R2 (64-bit) Windows Server 2012 and R2 (64-bit) Windows Server 2019 (64-bit) Windows Server 2019 (64-bit) Windows 7 (32- and 64-bit) Windows 8 (32- and 64-bit) Windows 8.1 (32- and 64-bit) Windows 10 (32- and 64-bit) Windows 11 (32- and 64-bit) Mac OS 10.13, 10.14, 10.15 Fedora® Care Ubuntu®	
Network Protocols	TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6, WSD Microsoft Windows Networking over IP Support for Microsoft Universal Print Bonjour®/AirPrint™ IPv6 Most protocols not in use can be disabled	
Font Capability	PCL: 93 scalable fonts, line printer, and bitmap font (including Cyrillic font support) PostScript 3: 173 Type 1 fonts, 2 Multiple Master fonts	
Xerox® Global Print Driver®	A truly universal print driver that lets IT administrators install, upgrade, and manage Xerox® Devices and non-Xerox devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls and simplifying print services management	
Xerox® Pull Print Driver	Makes it easy for IT managers to qualify, deploy, and manage all print devices using a single driver in a Pull Print environment. Uses a single queue and single driver. The Xerox® Pull Print Driver extends convenience across a broad range of printing assets. IT administrators no longer need to manage and configure multiple drivers. Used in conjunction with Equitrac Office®, Ysoft® SafeQ®, Pharos®, and others	
Unified Address Book for Fax	Unified Address Book for Fax, Internet Fax, Email and Scan to	
Features	Services supported: Fax, Internet Fax, Email, Scan to Maximum contacts: 5,000 Contacts: Supports 1 or more destinations Favorites for quick access of all services supported	

Scan	
Concurrency	Scan while the system is printing, copying, or while it is transferring scan to network or fax jobs (priority is for return of scanned originals and printing concurrent jobs)
Input Speed (up to)	TBD ppm black-and-white and color (simplex) TBD ipm black-and-white and color (duplex)
Resolution	75 x 75 dpi to 600 x 600 dpi
Bit Depth	1-bit (black-and-white), 8-bit (grayscale), 24-bit (color)
Maximum Scan Area	8.5 x 14 in (215.9 x 355.6 mm), Legal
Scan Template Management	Support 250 scan templates Create Xerox® CentreWare® IS scan templates and share via device cloning to other multifunction printers' confirmation sheet options
Network Protocols	SFTP, FTP, SMB, HTTP, HTTPS
File Compression	Color TIFF (TIFF 6.0 or TTN2 with JPEG, LZW) Black-and-white TIFF (G3MH, G4 MMR compression – single or multiple pages) PDF/A-1b (MRC, JPEG, G3 MH, G4 MMR, JBIG 2 Huffman, JBIG Arithmetic Compression, Deflate (for black-and-white and within MRC)) Linearized PDF/PDF/A
Document Management Fields (Metadata)	Features only available in Network Scan to File Templates: • 1 to 6 user programmable metadata fields per network scan to file templates and unlimited fields within the template – Metadata field consists of field name, default value, and other configurations • Customized fields viewed on user interface for variable data input
Scan Features	Auto Background and Shadow Suppression Bound Originals Compression Quality/File Size Control Edge Erase Mixed Size Originals Scan Build Job Original Type (Photo and Text, Photo, Text, Map, Newspaper/Magazine) Reduction/Enlargement Single Touch Scan buttons (up to 10) Size for Size (for mixed size originals) Touchless Workflow Accelerators TWAIN Support/WIA 2.0 Support
Scan to Email (Standard)	
Scan Features	Auto send to self Email signatures (6 lines each of 128 character max), email message body (user configurable), email Embedded Web Server confirmation sheet options Email signing (requires Smart Card option) Scan to Email S/MIME Encryption Touchless Workflow Accelerators
Directory Access	Address list via LDAP (Windows Active Directory, Exchange, Notes, Domino), Device Address Book
Scan To	
Standard Features	Scan to Email Scan to Home Scan to Mailbox Scan to Network (using Secure FTP/HTTP/HTTPS) Scan to Network Folder (using Secure FTP/HTTP/HTTPS) Scan to PC/Server Client (SMB or FTP) Scan to USB
Optional Features	(Native Scan to Cloud Repositories (Dropbox, OneDrive, and Google Drive) ³
Workflow Scanning (Optional features)	
Scanning Software	Autostore v7 eCopy-ScanStation v5.2 ecopy-ShareScan v5.2
Scanning Apps and Xerox App Gallery	Scan to: Dropbox, Google Drive, Microsoft OneDrive, Microsoft Office 365, Box, Xerox® Workplace Mobile App (iOS/Android) See the full list of apps available in the Xerox App Gallery: xerox.com/AppGallery

Security

Features


- Audit Log
- Cisco® Identity Services Engine (ISE) compatible • Configuration Watchdog (Monitors and remediates 75 security settings in the following areas):
- 802.1x
- Admin Password Reset
- Audit Log
- Automatic Software Upgrade
- Email Alerts
- Hold All Jobs
- Immediate Job Overwrite9
- Installation Policies
- PII Login Name
- PostScript Passwords
- Remote Services Enablement
- Remote Start (Mopria(R) or AirPrint™)
- Remote Start (TWAIN)
- Reprint Saved Jobs
- Scan to Mailbox (Internal storage)
- Scheduled Disk Overwrite9
- Secure Passcode Length
- Secure Print Device Policies
- SIEM
- SNMP
- System Timeout
- USB (Print from USB)
- USB (Scan to USB)
- USB Port Management
- User Data Encryption
- Expanded Authentication
- Digitally signed PDF (when using Smart Card authentication) Encrypted and authentication to SMTP server for Scan to Email
- Encrypted/Password Protected PDF (when using Email and Network Scan Templates only)
- FIPS 140-2 256 bit Hard Disk Encryption, TLS 1.1/1.2/1.3, IPPS, HTTPS, SFTP, SNMPv3
- Immediate Image Overwrite/Securely delete jobs using approved algorithms9
- Local Authentication (internal database)
- Network authentication to access device and/or device services via Kerberos (UNIX/Windows Server 2008), SMB (Windows Server 2008,
- Windows server 2012), NDS, LDAP authentication
- On Demand Image Overwrite (Scheduled, Manual), includes sanitation of unused area of disk⁹
- Smart Card authentication 144k CAC/PIV Card Support (2048 bit certificate key)/.NET
- Secure Data
- Secure Print (up to 10 digit PIN or Network Authentication)
- Expanded Authorization
- Authorization per user per service
- SA access based on network credentials
- User Permissions required to access Print and Print Features (e.g., time restrictions) reflects in the print driver
- Full System Common Criteria certified by NIAP under HD Protection Profile for Hardcopy Devices v1.0 (HCD-PP v1.0)
- Hide Print Job Names
- IP Filter, IPsec, IPv6, TLS V1.0, V1.2, V1.3, SNMP V1/V2/V3, HTTPs, 802.1X, SFTP
- Port disablement including USB ports
- LogRhythm, and Splunk

Fax	
Network Server Fax Features	
Compatibility	ITU (CCITT) group 3/ECM; Various Xerox® Business Innovation Partner Solutions
Maximum Scan Area	8.5 x 14 in (215.9 x 355.6 mm), Legal
Fax Send Features	One-or Two-sided Scanning (up to TBD) Add to Send List (200 numbers maximum) Build Job, Favorites, Delay Send (specific time) Original Type (photo, text or photo and text)
Fax Print Features	One- or Two-sided Printing, Staple, Secure Print
Transmission Resolution	Mono-Resolution Standard 200 x 100 dpi (Send) 200 x 100 dpi, 204 x 98 dpi (Receive) Fine 200 x 200 dpi (Send) 200 x 200 dpi, 204 x 196 dpi (Receive) SuperFine 300 x 300 dpi (Send) 300 x 300 dpi, 204 x 391 dpi (Receive) UltraFine 600 x 600 dpi (Send) 600 x 600 dpi, 400 x 400 dpi, 408 x 391 dpi (Receive) Color-Resolution Fine 200 x 200 dpi (Send) 200 x 200 dpi (Receive) SuperFine 300 x 300 dpi (Send) 300 x 300 dpi, 400 x 400 dpi (Receive)
Walk-up Fax Features (Custo	mer-Installable – 1 line)
Compatibility	ITU (CCITT) Group 3
Speed/Modems	Single V.34 modem. V.34 33600 – 2400 BPS. Less than 4 seconds per page transmission time
Compression/Speed	MH/G3, MR/G3, MMR/SG3, JBIG/SG3
Resolution	Walkup Send: Mono Resolution Standard 200 x 100 dpi (Send) 200 x 100 dpi, 204 x 98 dpi (Receive) Fine 200 x 200 dpi (Send) 200 x 200 dpi, 204 x 196 dpi (Receive) SuperFine 300 x 300 dpi (Send) 300 x 300 dpi, 204 x 391 dpi (Receive) UltraFine 600 x 600 dpi (Send) 600 x 600 dpi, 400 x 400 dpi, 408 x 391 dpi (Receive) Color Resolution Fine 200 x 200 dpi (Send) 200 x 200 dpi (Receive) SuperFine 300 x 300 dpi (Send) 300 x 300 dpi, 400 x 400 dpi (Receive) Receive: Accepts all sizes
Fax Send Features	LAN Fax (fax from print driver) Auto Fax Transmission Reduction Page-by-page Job Status at the Machine Delay Start, Build Job, Favorites Automatic Memory Resend Automatic Cover Sheets PSTN Fax Batch Send (up to memory capacity) Device Address Book (up to 5,000 contacts) Touchless Workflow Accelerators
Fax Receive Features	One- or Two-sided Printing Receive Print Mode – Manual (size, margin, stock, header)/Auto Output Tray Selection Up to 200 Password-protected Mailboxes Secure Receive Receive Timestamp Auto Answer Delay
Fax Forward	Forward to Email or SMB Location Fax Forward on Receive Only
Fax Reports	Activity, Dial Directory, Group Directory, Transmission Confirmation, Pending Fax, Options Report, On Demand Overwrite ⁹ Report, Mailbox Report, Broadcast Report
Directory Access	Utilizes the Unified Address Book Group fax available
Auto Redial	Up to 14 attempts (per country requirements) 1 to 25 minute intervals
Auto Resend	Up to 5 attempts

Device Management	
Administrative Protocols	DHCP, BOOTP, SNMP, SLPv2, HTTP, HTTPS, AutoIP (Self Assigned Address), TLS, NTP, DNS, SMB, SMTP/POP3, WSD, LDAP, Multicast DNS, Bonjour,
Administrative Protocols	syslog (for SIEM)
Management Support	SNMP Version 1. SNMP Version 2c and SNMP Version 3 trap over TCP/IP and IP MIB access (IETF-MIBII RFC 1213)
	Host Resources MIB RFC 2790, Printer MIB RFC 3805, PWG-Imaging-System-Power MIB, Fleet Orchestrator, Configuration Watchdog
Xerox® CentreWare® Web Software	A Web-based server application for network administrators that permits Web browser-based device management from any workstation, whether running on Windows, UNIX, or any other operating system: • Works with any SNMP-managed printer from any manufacturer • Remote configuration of SNMP v3 • Provides help with device discovery and installation, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management • Auto-detect Xerox® CentreWare® Web server and download configurations files for touchless remote install
Xerox® Device Manager	Xerox® Device Manager collects and manages the data that drives fact-based decisions for your enterprise device management environment. It is a single tool to install print queues and configure, manage, monitor, and report on both networked and locally connected devices – regardless of vendor – across your enterprise. Xerox® Device Manager provides: • Device monitoring and troubleshooting • Remote configuration of SNMP v3 • Extensive reporting and discovery of new devices • Usage collection, chargeback, and billing capabilities • Auto-detect Xerox® Device Manager server and download configurations files for touchless remote install
Xerox® Workplace Cloud	Remote management to set and audit device configuration data with Xerox® Workplace Cloud, eliminating the need for an on-site server
Fleet Orchestrator	Fleet Orchestrator feature offers the ability to create a group of devices that share information with each other via a secure peer-to-peer connection. The following data can be shared: Software update files, clone files, and 1-Touch App files. Auto-assembly feature allows a new VersaLink® to automatically set itself up on the network to be automatically configured
Xerox® Device Types for SAP Environment	Xerox, together with SAP through our Gold-level membership in the SAP Printer Vendor Program, provides seamless connectivity between SAP systems and your Xerox® Printers and Multifunction Printers. As an SAP customer, you benefit from having SAP-certified Xerox® Device types available right from SAP's online delivery model. SAP-certified device types for Xerox® Printers and Multifunction Printers are available to download. office.xerox.com/Software-Solutions
Xerox® Device Types for SAP R/3 Intelligent Barcode Utility (optional)	Provides built-in process intelligence that allows the printing of barcodes on any appropriately configured PostScript printer in specific versions of SAP environment and within Latin-1 (ISO8859-1) SAP system code pages only. Used in conjunction with Xerox® PostScript Device Types for SAP environment and Xerox® Font Center Barcode Fonts. Information available at office.xerox.com/Software-Solutions
Xerox® Embedded Web Serve	er – Integrated Device Web Pages Provided by the Device
Device Status	Web server embedded in Network Controller: • Tray status/contents • Consumables status • Alerts • Remote Control Panel
Job Submission	Print-ready files: PS, PCL, TIFF, PDF, JPG, TXT, PRN Output feature selection (2-sided, collate, orientation, output destination) Delivery options (Immediate, sample set, delay, secure, save job for reprint)
Device Administration	Allows simple, remote installation setting of configuration options and management of the device, Fleet Orchestrator
Browsers	Internet Explorer 10.x, 11.x Safari 10.x, 11.x Mozilla Firefox 45.x through 53.x Opera 25.x through 53.x Chrome 48.x through 72.x
Support	Install print/scan drivers and online support available via support.xerox.com
Languages Supported	International English, International French, Italian, German, International Spanish, Dutch, Brazilian Portuguese, Swedish, Norwegian, Danish, Finnish, Russian, Simplified Chinese, Korean, Japanese, Arabic, Ukranian, Croatian
Remote Services	
Xerox® Automatic Meter Readings (AMR)	Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® Device usage. Eliminates the need for time-consuming end-user involvement and ensures that meter reads are submitted to Xerox on time
Xerox® Automatic Supplies Replenishment (ASR)	Automatically orders supplies for Xerox® Devices based on actual usage, eliminating the need to manually manage supplies inventory





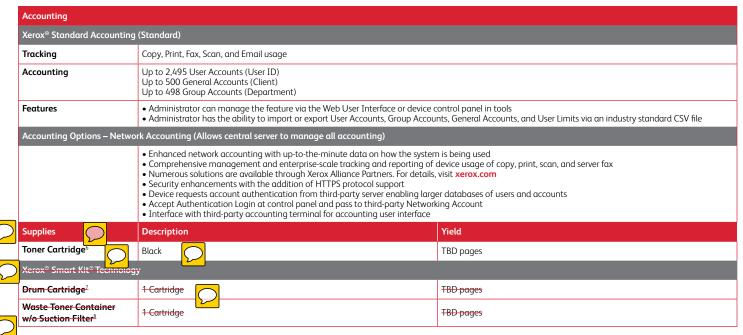

Declared in accordance with ISO/IEC 24734.

- ⁹ Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.
- Not available in all geographies.
- ⁴ Paper capacities are based on 20 lb/75 gsm stock; capacities will vary with different weight stocks.
- ⁵ Sold separately in some geographies.
- ⁶ Average standard pages. Declared in accordance with ISO/IEC 19798. Toner yield can vary due to many factors, including but not limited to, image area coverage, image content, media size, media orientation, run mode, application types, monthly print volumes, and image quality set-points.
- 7 Average drum yield is based on a run length of 5 pages of 8.5 x 11 in/A4 LEF
- 8 Waste Toner Container yield will vary depending on type of image, area coverage %, and Job run length.



Return spent imaging supplies through the Xerox® Green World Alliance® collection/reuse/recycling program. Visit xerox.com/About-Xerox/Recycling.

For more information, visit us at xerox.com/Office.

