

wineo

THAT'S FLOORING

NEW



wineo 1000

PURLINE ORGANIC FLOORING

**BEST INGREDIENTS
FOR HEALTHY LIVING**

_CERTIFIED SUSTAINABILITY
_PROVEN HEALTHY LIVING
_STATE OF THE ART MATERIAL QUALITY
_FUTURE-PROOF DESIGN
_LIFETIME GUARANTEE
_HIGH DURABILITY
_EASY INSTALLATION
_MADE IN GERMANY
_WITHOUT THE ADDITION OF CHLORINE
_WITHOUT PLASTICISERS
_WITHOUT SOLVENTS

**THAT'S
FLOORING**

CONTENT

Healthy living	05
Best ingredients	06
Healthy homes	09
NEW Trends	10
Product advantages	15
Product composition	16
NEW NatureSurface	21
NEW Premium and Basic	22
wineo 1000 wood XL	25
wineo 1000 wood L stone L	31
PERFECT FIT accessories	40
Service	41
Certifications	42
Technical data	44





**NATURALLY
SUSTAINABLE**

Rustic Oak Nougat
wineo 1000 wood XL | Elastic | PL315R
wineo 1000 wood XL | Elastic | PLC315R
wineo 1000 wood XL Multi-Layer | Rigid | MLP315R

BEST INGREDIENTS FOR HEALTHY LIVING

Living in harmony with health and nature, feeling safe and secure within our homes, that is our aspiration. That is why we attach so much importance to the best ingredients for the best-ever ambience in the home.

Our comfortable, elastic PURLINE organic flooring is manufactured to our own formulations. We use the best raw materials for it. You can breathe freely indoors and be sure that you are doing the best for your family.

THE QUALITY SEAL FOR MODERN LIVING



PURLINE organic flooring is a specialist polyurethane flooring with the best natural ingredients such as plant oils and mineral components.

It is based on ecuran, the innovative high-performance composite material which takes environmental aspects into consideration as well as being sustainable and satisfying modern demands.

PURLINE organic flooring combines all the benefits that modern floors need to have: it is especially high-performance, the authentic designs are impressive and it is natural. Based on mainly natural and renewable raw materials, it is produced entirely in the Eastern Westphalia region of Germany **without the addition of chlorine, plasticisers or solvents.**

MADE IN GERMANY

CASTOR OIL

Plant oils replace the majority of petrochemical polyols in the polyurethane formulation. Castor oil, extracted from castor beans, mostly comes from India and is typically grown by small-scale farmers who also use it as a protective plant for agricultural land. Castor oil plant cultivation is socially responsible; it is not grown in monocultures or on cleared land and does not compete with food farming. Similarly high criteria apply to alternative plant oils. Windmüller processes over 7,000 tonnes of castor oil every year. wineo has recently joined the first global programme for the sustainable cultivation of castor beans.

Find out more at en.wineo.de

DID YOU KNOW?



SUSTAINABILITY

because that's what we believe in

- with the high-performance composite material ecuran
- usage of renewable raw materials and natural fillers
- easy to dispose of
- environmentally award-winning (see pages 42/43)
- completely odour-neutral and promotes wellbeing



HIGH-PERFORMANCE

for everyday use

- lifetime guarantee **NEW**
- tested resilience
- for domestic through to light industrial use
- low lifecycle costs
- UV-resistant and temperature-stable
- outstanding residual indentation performance



DESIGN DIVERSITY

eye-catching aesthetics

- over 150 decors in four collections
- 15 different formats
- for gluing and clicking in
- on the roll or as planks
- modern, colourful and creative designs
- authentic-looking surface
- brushed surface to match **NEW**
- all-round V4 joint



**NATURALLY
HARMLESS**

Calm Oak Ash
wineo 1000 wood XL | Elastic | PL308R
wineo 1000 wood XL | Elastic | PLC308R
wineo 1000 wood XL Multi-Layer | Rigid | MLP308R

THE BEST INGREDIENTS FOR HEALTHY HOMES

Live everyday life with materials that are harmless in every respect. Allowing you to always breathe easily – this is what healthy homes are all about. PURLINE organic flooring makes an important contribution as it does not emit any harmful substances into the indoor air, it is odourless, quiet and gentle on the joints. Its properties make it perfect and safe for family homes. It can be used without hesitation as a healthy floor from children's rooms to kitchens.



80–90% of our lives are spent in enclosed spaces.



An adult takes 20,000 breaths every day, a child even more.



1/3 of all Europeans suffer with asthma or allergies.



Only 28% of all people have sufficient ventilation during winter.

**DID YOU
KNOW?**

NEW


THE BEST INGREDIENTS FOR A COORDINATED INTERIOR

Taking into account current design and colour trends based on the very latest trend research, four central themes have been created, for which a large assortment of matching surface designs have been developed. Discover our interior colour recommendations.



FEEL IT
SENSUAL LIFE

MUTED
DISCERNING
CALM



GO UP
FOUND CREATION


FRESH
OPTIMISTIC
COLOURFUL



MID-CENTURY
STYLE NEO-CLASSICAL
GENEROUS

LOOK BACK

REPEAT THE PAST

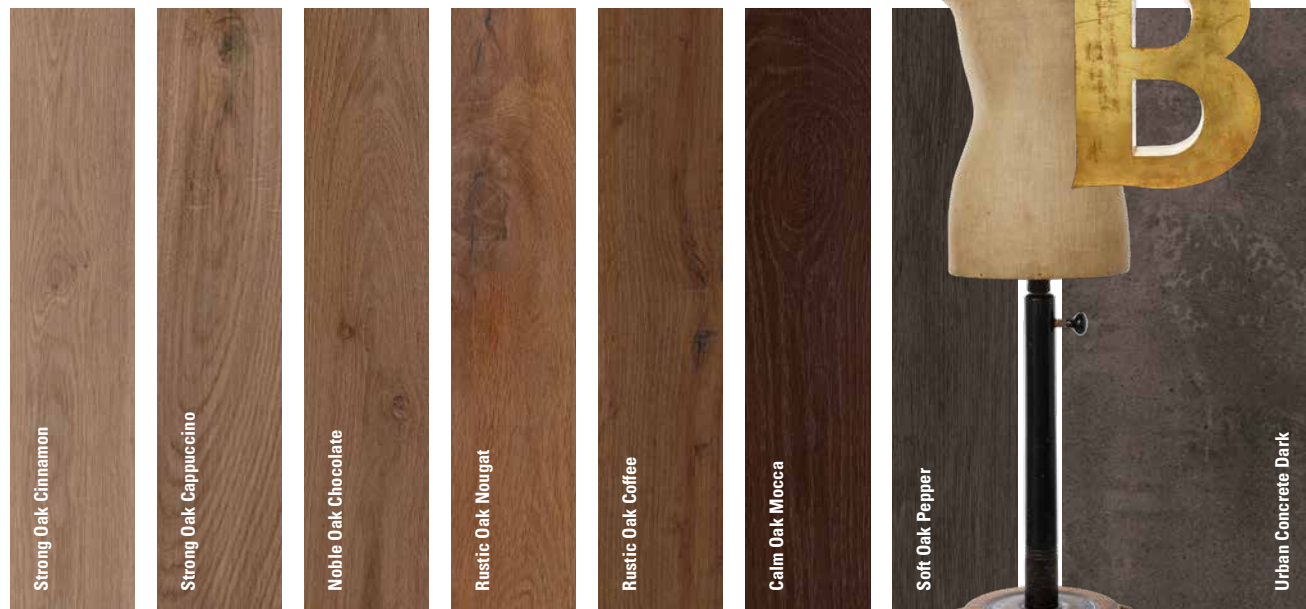

TALK ABOUT
ART OF TRADITION

AUTHENTIC
RUSTIC
NATURAL



Find out more about the trends.





**NATURALLY
RESILIENT**

Natural Pine Beach
wineo 1000 wood L | Elastic | PL297R
wineo 1000 wood L | Elastic | PLC297R
wineo 1000 wood L Multi-Layer | Rigid | MLP297R



DURABLE

wineo organic flooring is **stain resistant** and scores well with high resilience.



EASY CARE

The polyurethane surface makes the organic flooring **easy to clean** and maintain.



UV-RESISTANT

Ready for summer: PURLINE organic flooring has a high light fastness and **an excellent UV resistance**.



NON-SLIP

The tested surface ensures **safety with every step**.



SUITABLE FOR HIGH HUMIDITY AREAS

In the **kitchen or bathroom**: PURLINE organic flooring performs in every situation.



UNDERFLOOR HEATING

The organic flooring quickly warms up on top of underfloor heating, **saving lots of energy**.



LOW-EMISSION

Take a deep breath: PURLINE organic flooring emits **no harmful substances** into the atmosphere.



ODOUR NEUTRAL

PURLINE gives off **no unpleasant odours**.



MINIMAL SMOKE

Even in the event of fire: **low smoke emission**. Escape routes remain more visible.



QUIET

The soft surface ensures **pleasantly quiet acoustics**.



WARM TO THE FEET

The organic flooring **feels pleasantly warm** and is perfect for everyday life at home.



GENTLE ON THE ANKLES

Health-conscious: The elastic surface is gentle on the joints.


PRODUCT COMPOSITION

ELASTIC ORGANIC FLOORING FOR GLUING



Perfect solution for:

- even subsurfaces (new buildings)
- prepared subsurfaces (renovations)
- existing floor coverings (DIN 18202)
in combination with silentPREMIUM underlay mat

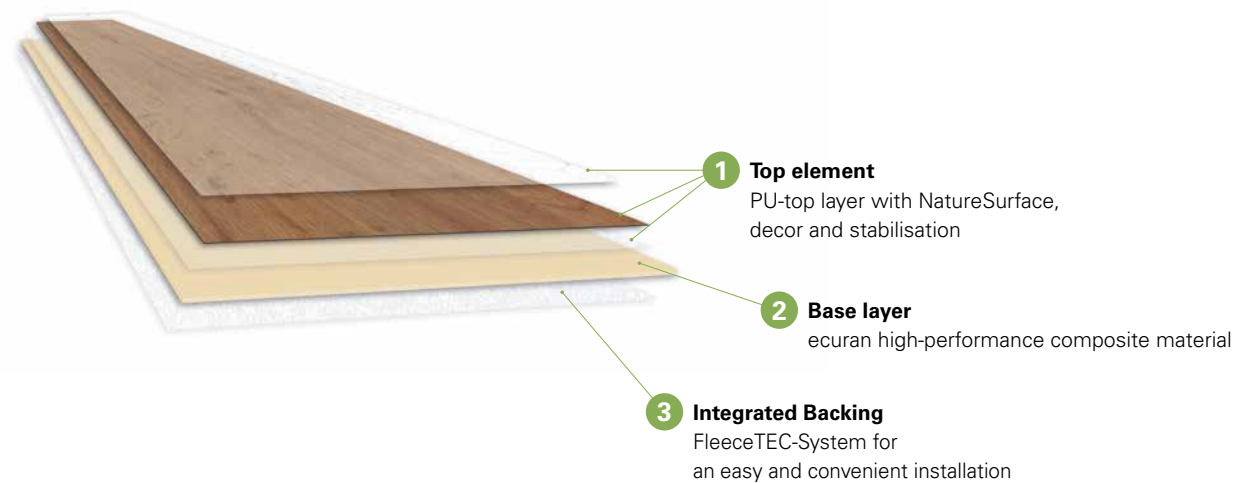


ELASTIC ORGANIC FLOORING FOR CLICKING IN



Perfect solution for:

- even subsurfaces (new buildings)
- prepared subsurfaces (renovations)

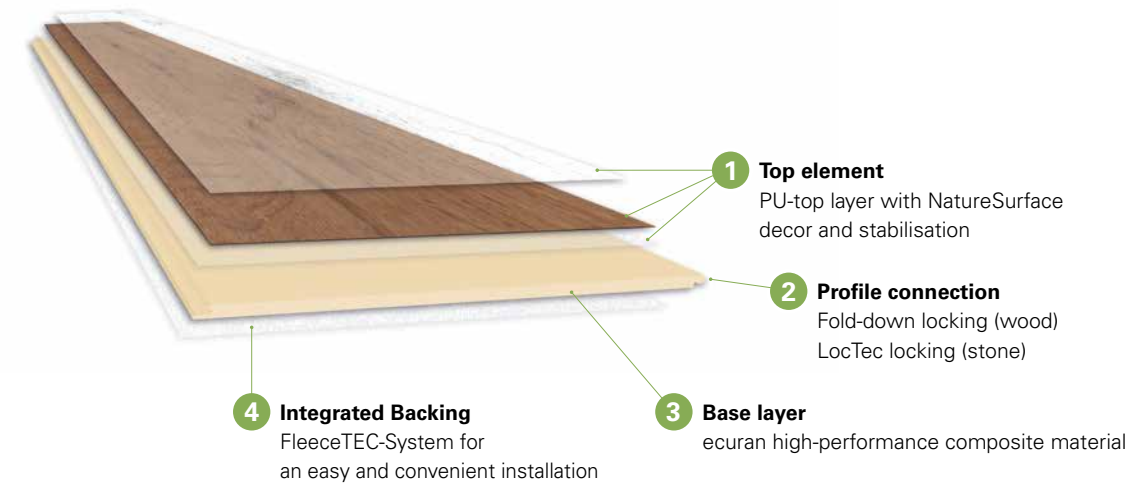

i

SPECIAL PRODUCT FEATURES

- low installation height of 2 mm
- perfect heat distribution when used over underfloor heating
- simple cutting to size with a cutter knife

INSTALLATION OPTIONS

1. STANDARD GLUING

- 1.1 firm bond with the existing subsurface
- 1.2 bonds to the double-sided, self-adhesive silentPLUS underlay mat

2. REMOVABLE DIY GLUING

- installation on silentPREMIUM self-adhesive underlay mat
- no gluing to the subsurface
- easy, fast and clean to install without liquid adhesives
- can be walked on immediately and is easy to remove

i

SPECIAL PRODUCT FEATURES

- low installation height of 5 mm
- perfect heat distribution when used over underfloor heating
- quick and easy installation thanks to proven click connection
- simple cutting to size with a cutter knife

INSTALLATION OPTIONS

1. FLOATING


- directly onto the prepared subsurface
- installation on stabilising silentComfort underlay mat
- can be walked on immediately and is easy to remove

MULTI-LAYER | RIGID ORGANIC FLOORING FOR CLICKING IN



Perfect solution for:

- subsurfaces with slight unevenness (renovations)
- bridging height differences (new buildings)

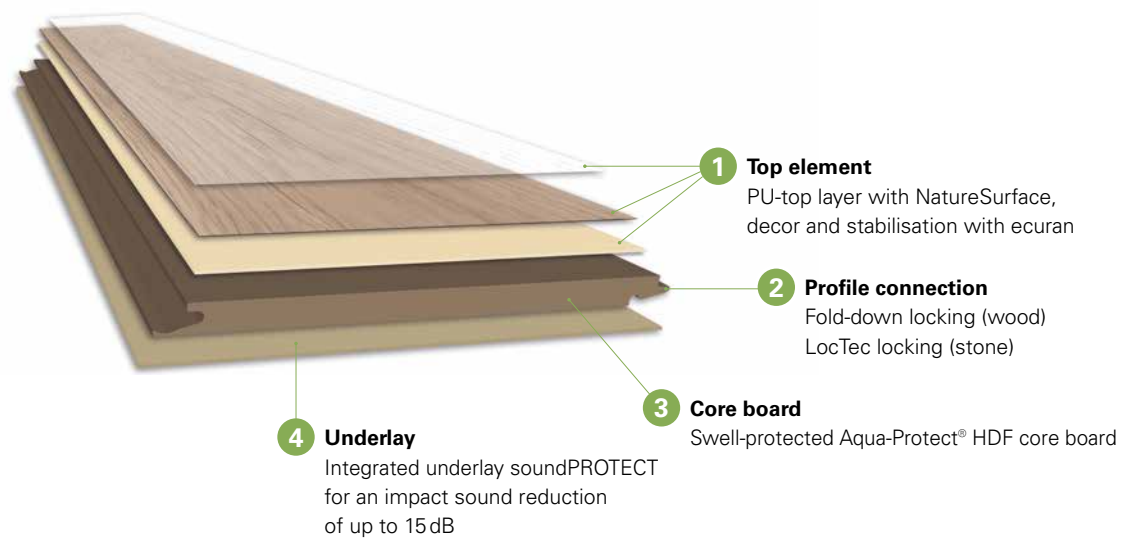

i

SPECIAL PRODUCT FEATURES

- practical installation height of 9 mm
- Tele-Stop: Minor irregularities in the subfloor will not show up
- Install-Ready: integrated underlay mat cuts refurbishment times and reduces walking and impact sounds by up to 15 dB
- quick and easy installation thanks to proven click connection
- cutting to size with a saw or laminate cutter

INSTALLATION OPTIONS

1. FLOATING


- direct installation on the subsurface
- PE vapour barrier for installation on mineral subsurfaces
- can be walked on immediately and is easy to remove

More information is available in our installation guides: see en.wineo.de



**NATURALLY
VERSATILE**

Rustic Oak Ginger
wineo 1000 wood XL | Elastic | PL314R
wineo 1000 wood XL | Elastic | PLC314R
wineo 1000 wood XL Multi-Layer | Rigid | MLP314R

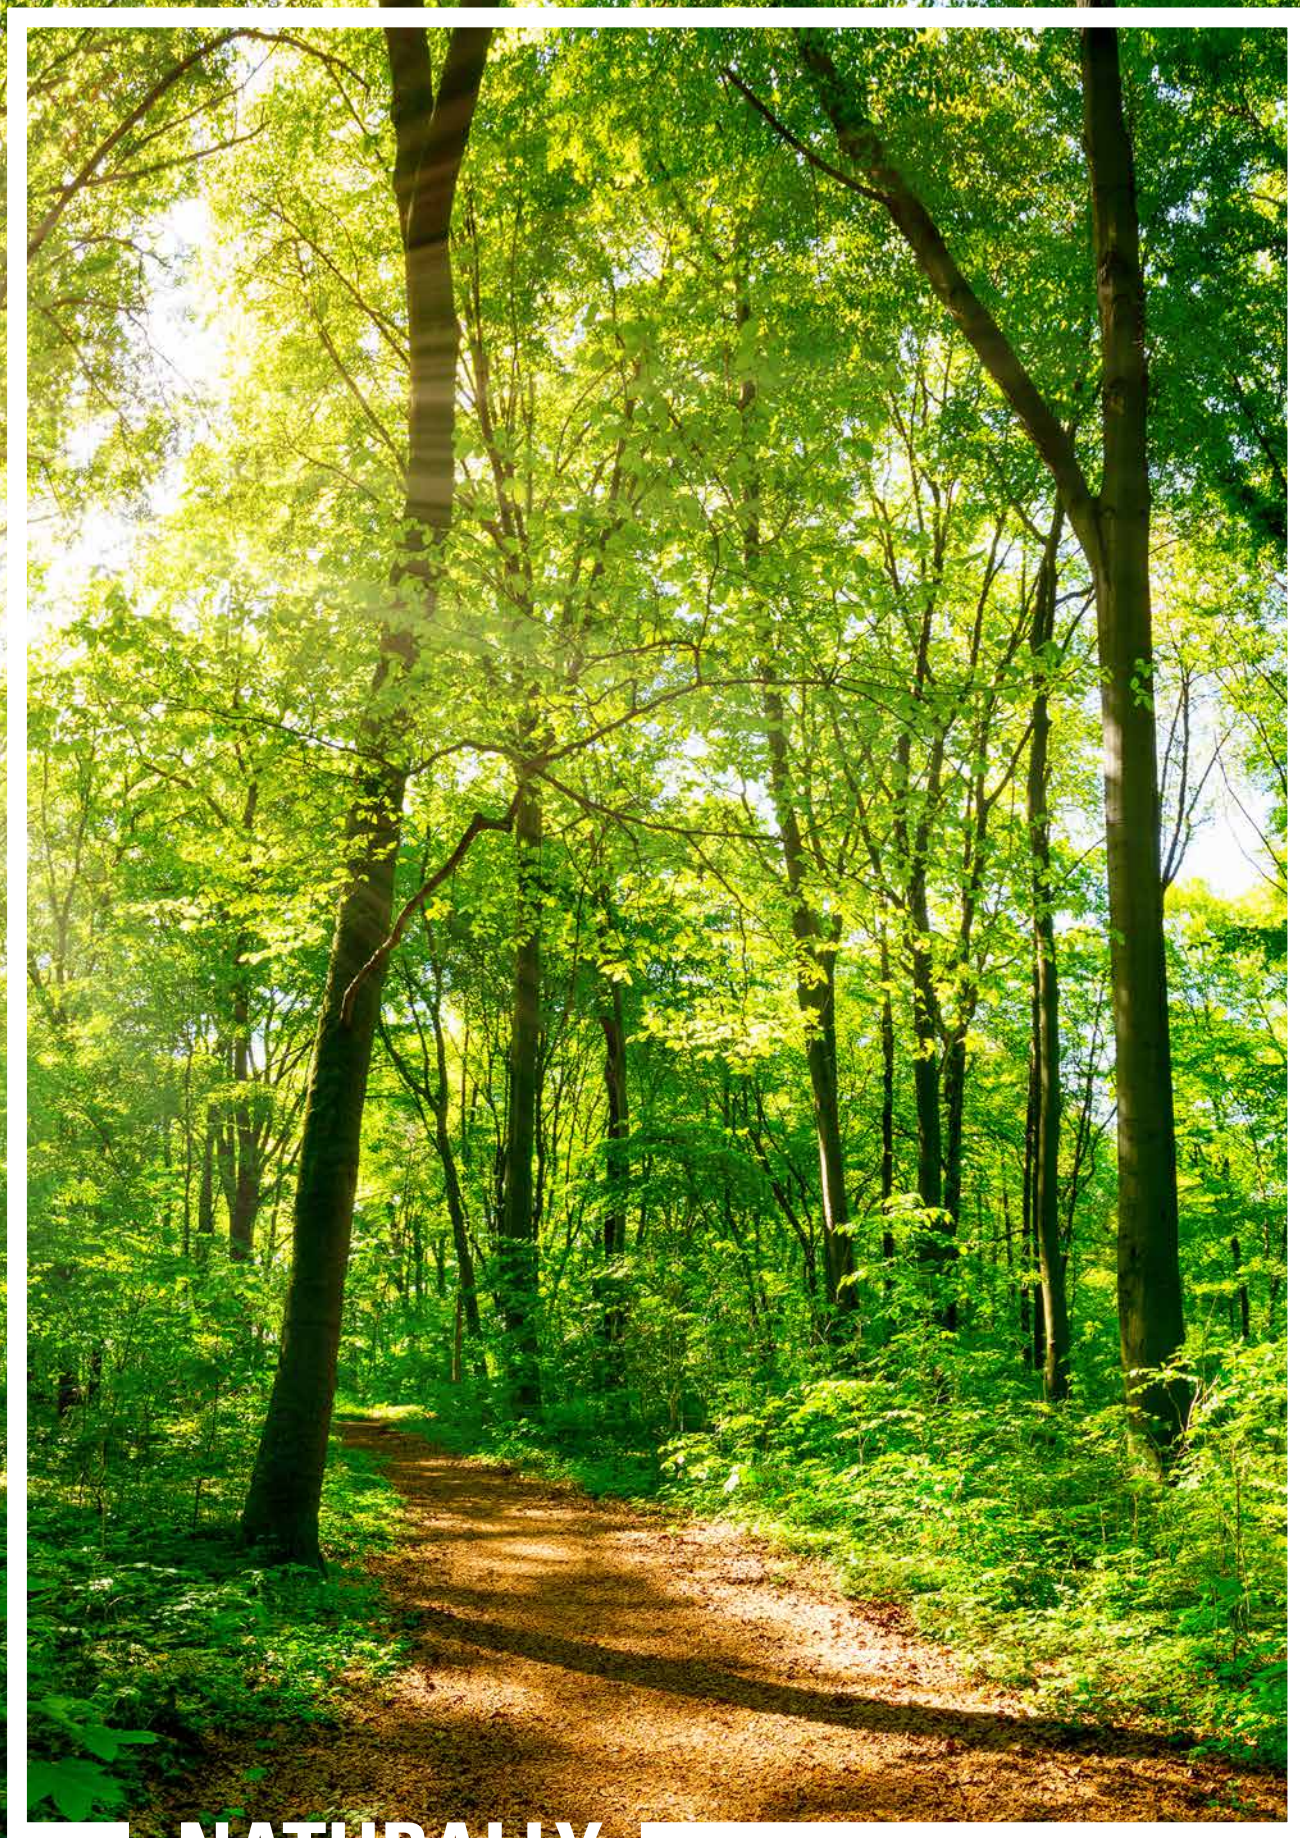

**NATURALLY
AUTHENTIC**

NEW

INSPIRED BY NATURE

The distinguishing feature of wineo 1000 is the **NatureSurface** texture. The special finish on this flooring recreates the traditional brushing technique and therefore belongs in the premier class of natural elastic floor coverings.

The various textures are matched to the individual designs and have an impressive ultra-matt finish. The result is organic flooring with an exceptional look and feel, and an authenticity as never seen before.



brushed surface to match
PREMIUM



elegant brushed texture
BASIC



fine brushed texture
BASIC



brushed concrete texture
BASIC



NatureSurface

The innovative technology

NEW

ONE PRODUCT TWO VERSIONS

Two product lines, Premium and Basic, have been created to introduce PURLINE organic flooring for healthy homes in a natural look. Each version has its own persuasive features.

WOOD XL

- brushed NatureSurface to match
- high-quality 1-strip wide plank in an XL-format
- striking, milled V-joint to emphasise the plank format
- 21 different planks for each decor
- no noticeable repeats
- supremely authentic wood effects



PREMIUM

WOOD L | STONE L

- brushed matt NatureSurface
- planks and tiles in classic L-format
- micro-bevel all round for a smooth overall look
- 10 different planks/tiles per decor



BASIC



NATURALLY INDIVIDUAL

Rustic Oak Ginger
wineo 1000 wood XL | Elastic | PL314R
wineo 1000 wood XL | Elastic | PLC314R
wineo 1000 wood XL Multi-Layer | Rigid | MLP314R



**NATURALLY
UNIQUE**

Calm Oak Ash
wineo 1000 wood XL | Elastic | PL308R
wineo 1000 wood XL | Elastic | PLC308R
wineo 1000 wood XL Multi-Layer | Rigid | MLP308R



wineo 1000 wood XL

SIMPLY FIRST CLASS

The high-performance, natural PURLINE organic flooring is now available for the first time with an authentic brushed surface to match finish. Wood grain, knots and cracks are emphasised by elevations and indentations in the surface texture – the overall effect is really impressive.

Closer to nature than ever before – the Premium version is available in 12 oak decors in the popular XL format with all-round V4 joints.

PREMIUM

wineo 1000 wood XL

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	1500 × 250mm	1507 × 246mm	1520 × 238mm
Product thickness:	2mm	5mm	9mm
Planks / Box:	14/5.25m ²	6/2.22m ²	6/2.17m ²



Installed area **Calm Oak Bright** | [PL305R](#) – [PLC305R](#) – [MLP305R](#) | brushed surface to match | lacquered, all-round joint (V4)



Calm Oak Bright | [PL305R](#) – [PLC305R](#) – [MLP305R](#) | brushed surface to match | lacquered, all-round joint (V4)

FEEL IT



Calm Oak Shell | [PL306R](#) – [PLC306R](#) – [MLP306R](#) | brushed surface to match | lacquered, all-round joint (V4)

FEEL IT



Calm Oak Mocca | [PL307R](#) – [PLC307R](#) – [MLP307R](#) | brushed surface to match | lacquered, all-round joint (V4)

LOOK BACK



Calm Oak Ash | [PL308R](#) – [PLC308R](#) – [MLP308R](#) | brushed surface to match | lacquered, all-round joint (V4)

GO UP

wineo 1000 wood XL

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	1500 × 250mm	1507 × 246mm	1520 × 238mm
Product thickness:	2mm	5mm	9mm
Planks / Box:	14/5.25m ²	6/2.22m ²	6/2.17m ²



Installed area **Noble Oak Powder** | [PL309R](#) – [PLC309R](#) – [MLP309R](#) | brushed surface to match | lacquered, all-round joint (V4)



Noble Oak Powder | [PL309R](#) – [PLC309R](#) – [MLP309R](#) | brushed surface to match | lacquered, all-round joint (V4)

FEEL IT



Noble Oak Vanilla | [PL310R](#) – [PLC310R](#) – [MLP310R](#) | brushed surface to match | lacquered, all-round joint (V4)

TALK ABOUT



Noble Oak Toffee | [PL311R](#) – [PLC311R](#) – [MLP311R](#) | brushed surface to match | lacquered, all-round joint (V4)

TALK ABOUT



Noble Oak Chocolate | [PL312R](#) – [PLC312R](#) – [MLP312R](#) | brushed surface to match | lacquered, all-round joint (V4)

LOOK BACK

wineo 1000 wood XL

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	1500 × 250 mm	1507 × 246 mm	1520 × 238 mm
Product thickness:	2 mm	5 mm	9 mm
Planks / Box:	14/5.25 m ²	6/2.22 m ²	6/2.17 m ²



Installed area Rustic Oak Taupe | PL313R – PLC313R – MLP313R | brushed surface to match | lacquered, all-round joint (V4)



Rustic Oak Taupe | PL313R – PLC313R – MLP313R | brushed surface to match | lacquered, all-round joint (V4)

GO UP



Rustic Oak Ginger | PL314R – PLC314R – MLP314R | brushed surface to match | lacquered, all-round joint (V4)

TALK ABOUT



Rustic Oak Nougat | PL315R – PLC315R – MLP315R | brushed surface to match | lacquered, all-round joint (V4)

LOOK BACK



Rustic Oak Coffee | PL316R – PLC316R – MLP316R | brushed surface to match | lacquered, all-round joint (V4)

LOOK BACK



NATURALLY HARMONIOUS

Rustic Oak Nougat
 wineo 1000 wood XL | Elastic | PL315R
 wineo 1000 wood XL | Elastic | PLC315R
 wineo 1000 wood XL Multi-Layer | Rigid | MLP315R



**NATURALLY
TRENDY**

Strong Oak Cappuccino
wineo 1000 wood L | Elastic | PL303R
wineo 1000 wood L | Elastic | PLC303R
wineo 1000 wood L Multi-Layer | Rigid | MLP303R

wineo 1000 wood L | stone L

SIMPLY STRAIGHTFORWARD

The 10 popular wood designs and 4 stone decors form a timeless basis for any current home interior trend.

Complete with a micro-bevel and brushed matt finish, this flooring will captivate with its tranquil overall effect and natural look. A classic for any room!

BASIC

wineo 1000 wood L

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm
Product thickness:	2 mm	5 mm	9 mm
Planks / Box:	22/5.68 m ²	8/2.02 m ²	8/1.93 m ²



Installed area **Light Maple Cream** | [PL296R](#) – [PLC296R](#) – [MLP296R](#) | elegant brushed texture | micro-bevel all round



Light Maple Cream | [PL296R](#) – [PLC296R](#) – [MLP296R](#) | elegant brushed texture | micro-bevel all round

FEEL IT



Installed area **Natural Pine Beach** | [PL297R](#) – [PLC297R](#) – [MLP297R](#) | elegant brushed texture | micro-bevel all round



Natural Pine Beach | [PL297R](#) – [PLC297R](#) – [MLP297R](#) | elegant brushed texture | micro-bevel all round

GO UP

wineo 1000 wood L

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm
Product thickness:	2 mm	5 mm	9 mm
Planks / Box:	22/5.68 m ²	8/2.02 m ²	8/1.93 m ²



Installed area **Comfort Oak Sand** | [PL298R](#) – [PLC298R](#) – [MLP298R](#) | elegant brushed texture | micro-bevel all round



Comfort Oak Sand | [PL298R](#) – [PLC298R](#) – [MLP298R](#) | elegant brushed texture | micro-bevel all round

GO UP

wineo 1000 wood L

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm
Product thickness:	2 mm	5 mm	9 mm
Planks / Box:	22/5.68 m ²	8/2.02 m ²	8/1.93 m ²



Installed area Intensive Oak Honey | PL299R – PLC299R – MLP299R | fine brushed texture | micro-bevel all round



Intensive Oak Honey | PL299R – PLC299R – MLP299R | fine brushed texture | micro-bevel all round

TALK ABOUT



Intensive Oak Caramel | PL300R – PLC300R – MLP300R | fine brushed texture | micro-bevel all round

TALK ABOUT



**NATURALLY
INVITING**

Intensive Oak Honey
 wineo 1000 wood L | Elastic | PL299R
 wineo 1000 wood L | Elastic | PLC299R
 wineo 1000 wood L | Multi-Layer | Rigid | MLP299R

wineo 1000 wood L

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm
Product thickness:	2 mm	5 mm	9 mm
Planks / Box:	22/5.68 m ²	8/2.02 m ²	8/1.93 m ²



Installed area Strong Oak Cinnamon | [PL301R](#) - [PLC301R](#) - [MLP301R](#) | fine brushed texture | micro-bevel all round



Strong Oak Cinnamon | [PL301R](#) - [PLC301R](#) - [MLP301R](#) | fine brushed texture | micro-bevel all round

LOOK BACK



Strong Oak Cappuccino | [PL303R](#) - [PLC303R](#) - [MLP303R](#) | fine brushed texture | micro-bevel all round

LOOK BACK

wineo 1000 wood L

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm
Product thickness:	2 mm	5 mm	9 mm
Planks / Box:	22/5.68 m ²	8/2.02 m ²	8/1.93 m ²



Installed area Soft Oak Salt | [PL295R](#) - [PLC295R](#) - [MLP295R](#) | fine brushed texture | micro-bevel all round



Soft Oak Salt | [PL295R](#) - [PLC295R](#) - [MLP295R](#) | fine brushed texture | micro-bevel all round

GO UP



Soft Oak Pepper | [PL304R](#) - [PLC304R](#) - [MLP304R](#) | elegant brushed texture | micro-bevel all round

LOOK BACK



Soft Oak Silver | [PL302R](#) - [PLC302R](#) - [MLP302R](#) | fine brushed texture | micro-bevel all round

FEEL IT

wineo 1000 stone L

Installation type:	Glue Elastic	Click Elastic	Click Multi-Layer Rigid
Format:	645 × 335 mm	642 × 330.5 mm	636 × 319 mm
Product thickness:	2 mm	5 mm	9 mm
Planks / Box:	24/5.19 m ²	10/2.12 m ²	9/1.83 m ²



Urban Concrete Light | PL317R – PLC317R – MLP317R
brushed concrete texture | micro-bevel all round

FEEL IT



Urban Concrete Smoke | PL318R – PLC318R – MLP318R
brushed concrete texture | micro-bevel all round

GO UP



Urban Concrete Steel | PL319R – PLC319R – MLP319R
brushed concrete texture | micro-bevel all round

TALK ABOUT



Urban Concrete Dark | PL320R – PLC320R – MLP320R
brushed concrete texture | micro-bevel all round

LOOK BACK



Urban Concrete Light
wineo 1000 stone L | Elastic | PL317R
wineo 1000 stone L | Elastic | PLC317R
wineo 1000 stone L Multi-Layer | Rigid | MLP317R

**NATURALLY
ROBUST**

PERFECT FIT ACCESSORIES

UNDERLAYS

We recommend using our polyurethane underlay material with wineo 1000.

The basis is provided by ecuran, a high-performance composite material that is manufactured primarily from plant-based oils such as canola oil or castor oil and naturally-occurring mineral components such as chalk.

- fast, energy-efficient distribution of ground heat
- excellent noise reduction with hard and soft floor coverings
- long-life performance of at least 30 years
- outstanding residual indentation behaviour
- sustainable raw materials
- without chlorine, plasticisers or solvents

Made with



www.blauer-engel.de/uz156



Detailed information can be found in our accessories brochure. (Art.-no. 20091021)

Download now:



SKIRTINGS

- decor matching MDF skirtings for all wineo floors
- universally usable skirtings in MDF as well as plastic/aluminium
- installation heights from 60 mm to 100 mm
- plastic mounting clips included in the range of accessories; alternatively glue or tack
- self-adhesive corner elements for easy installation




PROFILES

- Comfort Profiles (self-adhesive profiles) for DIYers
- Premium Profiles (screwable profiles) for professionals
- profile types for different applications: Transition, Adjustment and End profiles, L-End profiles, expansion joint profile, Angle profiles and stair nosing profiles



SERVICE

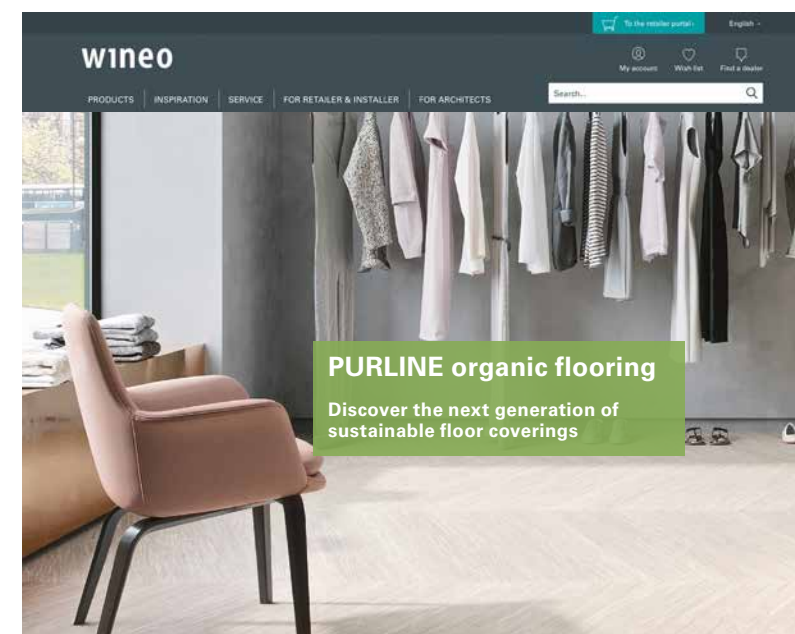

WINEO WORKSPACE & VIRTUAL SHOWROOM

Discover the whole world of wineo flooring on 2,000 square metres of our workspace, the showroom at our Augustdorf site. Every wineo floor covering is available here to discover and touch. Or go on a virtual voyage of discovery from the comfort of your own home and marvel at our new products in our virtual showroom.



EN.WINEO.DE

Even more information is available on our website:

- dealer portal with direct ordering option
- our top reference projects
- tender specifications
- technical data sheets
- cleaning and installation instructions
- find a dealer
- video portal with lots of tips
- newsletter registration

WINEO FLOOR VIEWER









Any wineo floor can be simulated in your own home in an instant with our wineo Floor Viewer. The ideal way to choose the perfect flooring for you.

Test the wineo Floor Viewer now at floorviewer.wineo.de or by QR code.









GUARANTEED HEALTHY LIVING

Environmental certifications

	<p>cradle to cradle®</p> <p>The cradle to cradle® certification confirms the utilisation of environmentally safe, healthy and reusable materials (technical reutilisation) and the use of solar power or other regenerative sources of energy, together with responsible water stewardship and strategies adopted by a company to embrace its responsibility to society.</p>	✓
	<p>Blue Angel (Blauer Engel)</p> <p>The “Blue Angel” guarantees that our products and services fulfil high requirements placed on environmental, health and usage properties. Criteria are compiled for each product group, which are checked every three to four years by the Federal Environment Agency.</p> <p>www.blauer-engel.de/uz120 www.blauer-engel.de/uz156 www.blauer-engel.de/uz176</p>	✓
	<p>Austrian eco-label (Österreichisches Umweltzeichen)</p> <p>The “Österreichisches Umweltzeichen” (Austrian eco-label) assesses products from quality, health-related and ecological standpoints. Basically, products can only be certified if they are harmless health-wise. The fulfilment of the criteria is checked every four years.</p>	✓
	<p>Greenguard</p> <p>The Greenguard certificate ensures that a product fulfils the strictest and most comprehensive requirements for emissions of Volatile Organic Compounds (VOCs) into the air.</p>	✓
	<p>M1</p> <p>Just like the “Blue Angel” quality mark in Germany, the M1 seal in the Finnish market labels our products as environmentally friendly, health-friendly and consumer-friendly. The focus is on emissions of Volatile Organic Compounds (VOCs).</p>	✓
	<p>A+</p> <p>Just like the “Blue Angel” in Germany, the A+ seal identifies our products as ecological, healthy and user-friendly in the French market.</p>	✓
	<p>TFI-TÜV PROFICERT PREMIUM for Multi-Layer</p> <p>The TFI (Textiles & Flooring Institute GmbH) and the TÜV Hessen evaluate products based on qualitative, health and ecological principals. Fundamentally, only products that are considered harmless to health can be certified.</p>	✓
	<p>FloorScore®</p> <p>With SCS Global Services' FloorScore® certificate program manufacturers of floor coverings can clearly assess the conformity of their products with the emission requirements in the U.S. but also worldwide utilized building evaluation systems, such as LEED.</p>	✓

Building certification/Product declaration

	<p>BREEAM</p> <p>The British sustainability certificate for development projects is used in 15 other countries.</p>	✓
	<p>DGNB</p> <p>Certification system of the German Sustainable Building Council and the Federal Ministry of Transport, Building and Urban Affairs. Evaluates a building's quality over its entire life cycle and is internationally applicable.</p>	✓
	<p>LEED</p> <p>Rating system of the US Green Building Council. It considers the regional and local criteria according to global standards. The use of building materials with cradle to cradle proof is evaluated with bonus points.</p>	✓
	<p>WELL</p> <p>The WELL Building Standard (WELL) focuses on health and wellbeing of the people within the building.</p>	✓
Information platforms		
	<p>Sentinel Haus Institut</p> <p>The Sentinel Haus Institut is a leading engineering service provider and knowledge leader for more healthy building, refurbishment and renovation.</p>	✓
	<p>Heinze</p> <p>Germany's leading information platform for building products, company profiles and architectural projects.</p>	✓

**SUSTAINABLE FOR NATURE.
WELLBEING FOR PEOPLE.**

NATURALLY HIGH-PERFORMANCE

	PREMIUM			BASIC					
wineo 1000	wood XL Elastic	wood XL Elastic	wood XL Multi-Layer Rigid	wood L Elastic	wood L Elastic	wood L Multi-Layer Rigid	stone L Elastic	stone L Elastic	stone L Multi-Layer Rigid
Installation type	to glue	to click	to click	to glue	to click	to click	to glue	to click	to click
Locking	-	Fold-Down	Fold-Down	-	Fold-Down	Fold-Down	-	LocTec	LocTec
Embossed in register	✓	✓	✓	-	-	-	-	-	-
Joint	V4	V4	V4	-	-	-	-	-	-
Format	1500 × 250 mm	1507 × 246 mm	1520 × 238 mm	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm	645 × 335 mm	642 × 330.5 mm	636 × 319 mm
Product thickness	2 mm	5 mm	9 mm	2 mm	5 mm	9 mm	2 mm	5 mm	9 mm
Content / box	14/5.25 m ²	6/2.22 m ²	6/2.17 m ²	22/5.68 m ²	8/2.02 m ²	8/1.93 m ²	24/5.19 m ²	10/2.12 m ²	9/1.83 m ²
Boxes / pallet	56/294.00 m ²	48/106.56 m ²	48/104.16 m ²	52/295.36 m ²	56/113.12 m ²	44/84.92 m ²	60/311.40 m ²	52/110.24 m ²	60/109.80 m ²
Weight	~ 3 kg/m ²	~ 9 kg/m ²	8.7 kg/m ²	~ 3 kg/m ²	~ 8.7 kg/m ²	8.7 kg/m ²	~ 3 kg/m ²	~ 8.9 kg/m ²	8.7 kg/m ²
Utilization classes EN ISO 10874	23/32	23/32	23/32	23/32	23/32	23/32	23/32	23/32	23/32
Staining / chemical resistance EN ISO 26987	very good resistance with regards to concentration and exposure time								
Reaction to fire EN 13501-1	C _{ii} - s1	C _{ii} - s1	C _{ii} - s1	C _{ii} - s1	C _{ii} - s1	C _{ii} - s1	C _{ii} - s1	C _{ii} - s1	C _{ii} - s1
Anti slip category DIN 51130	R9	R9	R9	R9	R9	R9	R9	R9	R9
Light fastness EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Residual indentation EN ISO 24343-1	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm
Dimensional stability EN ISO 23999	≤ 0.15 %	≤ 0.15 %	-	≤ 0.15 %	≤ 0.15 %	-	≤ 0.15 %	≤ 0.15 %	-
Underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C.								
Thermal resistance EN 12667	0.01 (m ² K)/W	0.01 (m ² K)/W	0.06 (m ² K)/W	0.01 (m ² K)/W	0.01 (m ² K)/W	0.06 (m ² K)/W	0.01 (m ² K)/W	0.01 (m ² K)/W	0.06 (m ² K)/W
Castor chair test EN 425 / ISO 4918	type W								
Impact sound reduction EN ISO 10140	~ 7 dB	~ 5 dB	~ 15 dB	~ 7 dB	~ 5 dB	~ 15 dB	~ 7 dB	~ 5 dB	~ 15 dB
Effect of a furniture leg EN 424	Foot Type 2 – no damage								
Anti-static properties EN 1815	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
*Guarantee	en.wineo.de/service/guarantee								

NEW Windmüller GmbH offers a manufacturer's lifetime warranty for PURLINE organic flooring in the residential sector. If an underlay material is used, the warranty is only valid if a recommended wineo PERFECT FIT underlay mat is used. For more information, please visit: en.wineo.de/service/guarantee

wood XL

- Elastic 1500 × 250 × 2 mm
- Elastic 1507 × 246 × 5 mm
- Multi-Layer | Rigid 1520 × 238 × 9 mm

Utilisation class 23: Domestic area with intensive usage

Utilisation class 32: Normal use in the commercial sector

wood L

- Elastic 1298 × 199 × 2 mm
- Elastic 1295 × 195 × 5 mm
- Multi-Layer | Rigid 1288 × 187 × 9 mm

stone L

- Elastic 645 × 335 × 2 mm
- Elastic 642 × 330,5 × 5 mm
- Multi-Layer | Rigid 636 × 319 × 9 mm

All decors shown in this brochure are reproductions. Windmüller GmbH provides no guarantee with regard to mistakes, printing errors and technical changes.



FORWARD THINKING. ALWAYS.

That is why we are constantly working on innovations and products that can do more. In recent years, we have been able to bring several new products to market which can now be found in many households and public buildings. Worldwide.

For generations, Windmüller has been known for its dedication to future development and collaborative partnerships. We impress people, companies and markets all over the world with our flooring ideas, materials and technologies.



"Our products are always as sustainable as current technology allows. And we are getting better at it every day. Because striving for sustainability is what drives us."

Matthias Windmüller
CEO Windmüller GmbH



MADE IN GERMANY

Windmüller GmbH

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de

Handed over by:

Product no. 20096160 | 03/2022

Member of

FEB ERFMI. DGNB m
m
f
a

wineo