

THE PERFECT FIT.





CONTENT

Underlay material	04
Skirting boards	16
Profiles	26
Stair nosing	30
Skirting boards	
External corners Inside corners	
Weld rods	34
Flash Coving Feature strips	36
Installation	
Cleaning & Repair	38



UNDERLAY MATERIAL PRODUCT FINDER

FOR PURLINE ORGANIC FLOORING OR DESIGN FLOORING

UNDERLAY MATERIAL PRODUCT FINDER

FOR LAMINATE FLOORING AND PARQUET FLOORING

Installation of	Installation type	Installation	Product
PURLINE	for gluing	floating	silentPREMIUM
organic flooring or		glued	silentPLUS
design flooring	for clicking in	floating	silentCOMFORT

Installation of	Requirement	Substrate	Product
Laminate flooring	Underfloor heating	mineral based	soundPROTECT PROFI SD
or parquet flooring			soundPROTECT SD
parquot nooring			noisePROTECT SD
		non-mineral based	soundPROTECT PROFI
			soundPROTECT
			noisePROTECT
	Heat insulation	mineral based	noiseREDUCT SD
		non-mineral based	noiseREDUCT
		mineral based	insulationBOARD
			PE vapour barrier
		non-mineral based	insulationBOARD



PU UNDERLAYS

6

FOR PURLINE ORGANIC FLOORING & DESIGN FLOORING







silentPREMIUM | Art. no. UPU1010



THE PREMIUM CLASS FOR THE FLOATING INSTALLATION OF ELASTIC FLOOR COVERINGS FOR GLUING

- self-adhesive top surface, floating installation, ultra-fast
- perfect solution for underfloor heating

Fits perfectly for PURLINE organic flooring & design flooring for gluing: wineo 400 | 600 | 1000 and all comparable elastic dryback floor coverings

silentPREMIUM is an underlay with a self-adhesive top surface. The underlay is rolled out in a floating arrangement, i.e. loose on the screed. Once the protective film has been removed, the flooring can be stuck on top. Working without adhesive is extremely clean and installation is very quick.

Technical characteristics	
Base material:	ecuran (bio-polyurethane)
Rolls/pallets:	40
Roll:	6.5 m ²
Thickness:	1.8 mm
Width:	1 m
Length:	6.5 m
Weight:	2.6 kg/m ²
Impact sound reduction:	~ 15 dB
Thermal resistance:	0.01 (m ² K)/W

silentCOMFORT | Art. no. UCT1000



THE CONVENIENT MAT FOR STABLE CLICKING INSTALLATION OF ELASTIC FLOOR COVERINGS

- adhesive top surface, floating installation, ultra-stable
- perfect solution for underfloor heating

Fits perfectly for PURLINE organic flooring & design flooring for clicking in: wineo 400 | 600 | 800 | 1000 and all comparable elastic dryback floor coverings

silentCOMFORT is the best choice for floating installation of click flooring. The adhesive surface ensures the click connections of the flooring are stable so that the flooring does not slip on the underlay. silentCOMFORT is therefore the most stable underlay for comfortable click installation of elastic flooring.

Technical characteristics	
Base material:	ecuran (bio-polyurethane)
Rolls/pallets:	40
Roll:	10 m²
Thickness:	1.5 mm
Width:	1 m
Length:	10 m
Weight:	1.5 kg/m²
Impact sound reduction:	~ 16 dB
Thermal resistance:	0.01 (m ² K)/W

PU UNDERLAYS

FOR PURLINE ORGANIC FLOORING & DESIGN FLOORING





silentPLUS | Art. no. UPU1020



THE PLUS IN QUIETNESS FOR FULL-SURFACE BONDING OF ELASTIC FLOOR COVERINGS FOR GLUING

- self-adhesive below, full-surface bonding above, ultra-quiet
- perfect solution for underfloor heating

Fits perfectly for PURLINE organic flooring & design flooring for gluing: wineo 400 | 600 | 800 | 1000 | 1500 and all comparable elastic dryback floor coverings

silentPLUS is an underlay with a self-adhesive lower surface. Once the protective film has been removed, the underlay is stuck to the substrate. The flooring is then fitted with an additional adhesive on the entire upper surface. This double adhesive method reduces impact noise up to 17 dB and guarantees that special bonus of very low noise.

ecuran (bio-polyurethane)
40
8 m²
2 mm
1 m
8 m
2 kg/m²
~ 17 dB
0.01 (m ² K)/W

BEST INGREDIENTS FOR BEST RESULTS

The basis of wineo PU underlays is ecuran, the unique bio-polyurethane from Windmöller. ecuran is based on plant oils such as canola or castor oil and naturally occurring mineral components such as chalk.



Canola or castor oil

Chalk



PU underlays made of ecuran

- fast, energy-efficient distribution of ground heat
- excellent noise reduction with hard and soft floor coverings
- long-life performance of at least 30 years
- recovery almost 100 %
- sustainable raw materials
- without the addition of chlorine, plasticisers or solvents

PU UNDERLAYS

FOR LAMINATE FLOORING







upgrade www.blauer-engel.de/Uz156

soundPROTECT | Art. no. UPU200



THE ALL-ROUNDER WITH LONG-LIFE PERFORMANCE

- ultra-quiet, efficient, for a stable click connection
- perfect solution for underfloor heating, suitable for non-mineral subsurfaces
 (a vapour barrier must be used with mineral subsurfaces)

Fits perfectly for laminate flooring:

wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

soundPROTECT is the perfect 2mm underlay for laminate and parquet flooring. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

Technical characteristics	
Base material:	ecuran (bio-polyurethane)
Rolls/pallets:	40
Roll:	8 m²
Thickness:	2 mm
Width:	1 m
Length:	8 m
Weight:	1.7 kg/m²
Impact sound reduction:	~19dB BEST
Reflected walking sound:	~ 28 % COMBI
Thermal resistance:	0.01 (m ² K)/W

soundPROTECT SD | Art. no. UPU200SD



- ultra-quiet, efficient, for a stable click connection
- suitable for mineral subsurfaces (such as screed) thanks to integrated vapour barrier
- perfect solution for underfloor heating

Fits perfectly for laminate flooring:

wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

soundPROTECT SD is the perfect 2 mm underlay for laminate and parquet flooring with integrated vapour barrier. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

Technical characteristics	
Base material:	ecuran (bio-polyurethane)
Rolls/pallets:	40
Roll:	8 m²
Thickness:	2 mm
Width:	1 m
Length:	8 m
Weight:	1.7 kg / m²
Impact sound reduction:	~ 19 dB BEST
Reflected walking sound:	~28% COMBI
Thermal resistance:	0.01 (m ² K)/W
SD value:	> 75 m

PU UNDERLAYS

FOR LAMINATE FLOORING







soundPROTECT PROFI | Art. no. UPU100



THE ALL-ROUNDER FOR PROFESSIONALS WITH LONG-LIFE PERFORMANCE 3 mm

- ultra-quiet, efficient, for a stable click connection
- perfect solution for underfloor heating, suitable for non-mineral subsurfaces (a vapour barrier must be used with mineral substrates)

Fits perfectly for laminate flooring:

wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

soundPROTECT PROFI is the perfect 3 mm underlay for laminate and parquet flooring. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

Technical characteristics Base material: ecuran (bio-polyurethane) 40 Rolls/pallets: 5.5 m² Roll: Thickness: 3 mm Width: 1 m Length: 5.5 m Weight: $2.8 \, kg / m^2$ Impact sound reduction: ~ 20 dB BEST COMBI Reflected walking sound: ~ 31 % Thermal resistance: 0.01 (m²K)/W

soundPROTECT PROFI SD | Art. no. UPU100SD



- ultra-quiet, efficient, for a stable click connection
- suitable for mineral subsurfaces (such as screed) thanks to integrated vapour barrier
- perfect solution for underfloor heating

Fits perfectly for laminate flooring:

wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

soundPROTECT PROFI SD is the perfect 3 mm underlay for laminate and parquet flooring with integrated vapour barrier. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

Technical characteristics	
Base material:	ecuran (bio-polyurethane)
Rolls/pallets:	40
Roll:	5.5 m²
Thickness:	3 mm
Width:	1 m
Length:	5.5 m
Weight:	2.8 kg/m²
Impact sound reduction:	~ 20 dB BEST
Reflected walking sound:	~31% COMBI
Thermal resistance:	0.01 (m ² K)/W
SD value:	> 75 m

PE UNDERLAYS

FOR LAMINATE FLOORING

noisePROTECT | Art. no. UPE100



THE RELIABLE PROTECTION FOR NOISE REDUCTION

quiet, lightweight, for use with underfloor heating

Fits perfectly for laminate flooring:

wineo 300 and all comparable standard laminate and parquet products

noisePROTECT is the entry level underlay for laminate and parquet flooring. This underlay is suitable for underfloor heating, is easy to handle and has good impact and reflected walking sound reducing characteristics.

Technical characteristics	
Material:	Polyethylen (PE)
Rolls/carton:	6
Roll:	15 m²
Thickness:	2 mm
Width:	1 m
Length:	15 m
Weight:	0.2 kg/m²
Impact sound reduction:	~ 19 dB
Reflected walking sound:	20 %
Thermal resistance:	0.038 (m ² K)/W

noisePROTECT SD | Art. no. UPE100SD



- quiet, lightweight, for use with underfloor heating
- suitable for mineral subsurfaces (such as screed) thanks to integrated vapour barrier

Fits perfectly for laminate flooring:

wineo 300 and all comparable standard laminate and parquet products

noisePROTECT SD is the entry level underlay for laminate and parquet flooring with integrated vapour barrier. This underlay is suitable for underfloor heating, is easy to handle and has good impact and reflected walking sound reducing characteristics.

Technical characteristics	
Material:	Polyethylen (PE)
Rolls/pallets:	20
Roll:	15 m²
Thickness:	2.2 mm
Width:	1 m
Length:	15 m
Weight:	0.32 kg / m²
Impact sound reduction:	~ 19 dB
Reflected walking sound:	15 %
Thermal resistance:	0.038 (m ² K)/W
SD value:	> 75 m

XPS UNDERLAYS

FOR LAMINATE FLOORING

oiseREDUCT | Art. no. UXPS100



THE SIMPLE MAT FOR NOISE REDUCTION

quiet, lightweight, for use as heat insulation (not suitable for underfloor heating)

noiseREDUCT SD | Art. no. UXPS100SD



- quiet, lightweight, for use as heat insulation (not suitable for underfloor heating)
- suitable for mineral subsurfaces (such as screed) thanks to integrated vapour barrier

Fits perfectly for laminate flooring:

wineo 300 and all comparable standard laminate and parquet products

noiseREDUCT is the entry level underlay for laminate and parquet flooring. This underlay is suitable for heat insulation (not for underfloor heating), is easy to handle and has good impact and reflected walking sound reducing characteristics.

Technical characteristics	
Material:	Polystyrol (XPS)
Rolls/carton:	24
Roll:	16.5 m²
Thickness:	2 mm
Width:	1.1 m
Length:	15 m
Weight:	0.09 kg/m²
Impact sound reduction:	~ 20 dB
Reflected walking sound:	14 %
Thermal resistance:	0.075 (m ² K)/W

Fits perfectly for laminate flooring:

wineo 300 and all comparable standard laminate and parquet products


noiseREDUCT SD is the entry level underlay for laminate and parquet flooring with integrated vapour barrier. This underlay is suitable for heat insulation (not for underfloor heating), is easy to handle and has good impact and reflected walking sound reducing characteristics.

Technical characteristics	
Material:	Polystyrol (XPS)
Rolls/carton:	24
Roll:	16.5 m ²
Thickness:	2 mm
Width:	1.1 m
Length:	15 m
Weight:	0.09 kg/m ²
Impact sound reduction:	~ 20 dB
Reflected walking sound:	14 %
Thermal resistance:	0.075 (m ² K)/W
SD value:	> 75 m

FIBREBOARD

FOR LAMINATE FLOORING

insulationBOARD | Art. no. UHF100



THE STRONG INSULATION BOARD FOR PROFESSIONALS

very good heat insulation, height compensation up to approx. 3 mm, high durability

Fits perfectly for laminate flooring: wineo 300 | 500 | 550 and all comparable

wineo 300 | 500 | 550 and all comparable standard laminate and parquet products

insulationBOARD has a proven track record with installation professionals as a heat insulation underlay. The insulating board has very good compensation characteristics and is very durable.

Technical characteristics			
Material:	Fibreboard		
Boxes/pallets:	24		
Quantity/box:	7 m² (15 pieces)		
Thickness:	5 mm		
Width:	0.59 m		
Length:	0.79 m		
Weight:	1.65 kg/m²		
Impact sound reduction:	~ 22 dB		
Reflected walking sound:	11 %		
Thermal resistance:	0.1 (m ² K)/W		



PE FILM & MULTI-PURPOSE SEALING TAPE

FOR LAMINATE FLOORING

PF vanour harrier | Art no 11711R200



- thin PE film for use under all hard flooring (not required for wood substrates)
- provides a separating layer between screed and underlay materials
- certified to B2

Fits perfectly for:

soundPROTECT, soundPROTECT PROFI, noisePROTECT, noiseREDUCT, insulationBOARD

Technical characteristics

Rolls/pallets:	100
Roll:	30 m²
Thickness:	0.125 mm
Width:	1 m
Length:	30 m

Multi-purpose sealing tape | Art. no. UZUB100



- special adhesive tape for sealing the edges of underlay
- required for all underlays with integrated vapour barrier

Fits perfectly for:

soundPROTECT SD, soundPROTECT PROFI SD, noisePROTECT SD, noiseREDUCT SD

Technical characteristics

Roll:	1
Width:	50 mm
Length:	50 m

PRODUCT RANGE COMPARISON

	silentPREMIUM	silentPLUS	silentCOMFORT	soundPROTECT	soundPROTECT SD	soundPROTECT PROFI	soundPROTECT PROFI SD	noisePROTECT	noisePROTECT SD	noiseREDUCT	noiseREDUCT SD	insulationBOARD
Pressure stability	****	****	****	****	****	****	****	**	**	***	***	****
Thermal conductivity	****	****	****	****	****	****	****	***	***	**	**	*
Recovery	****	****	****	_	_	_	_	_	_	_	_	_
Impact sound reduction	***	****	****	***	***	***	***	***	***	***	***	****
Reflected walking sound	_	_	_	****	****	****	****	***	**	**	**	*
Floor levelling properties	**	**	**	***	***	***	***	***	***	***	***	****
Service life	****	****	****	****	****	****	****	**	**	*	*	****
Sustain- ability	****	****	****	****	****	****	****	*	*	*	*	****
Energy saving for underfloor heating	****	****	****	****	****	****	****	***	***	*	*	*
	Fo	r elastic floor coveri	ings				F	or hard floor coveri	ngs			







 also available in a decor to match your wineo flooring, see next page



MDF material | Unit = 4



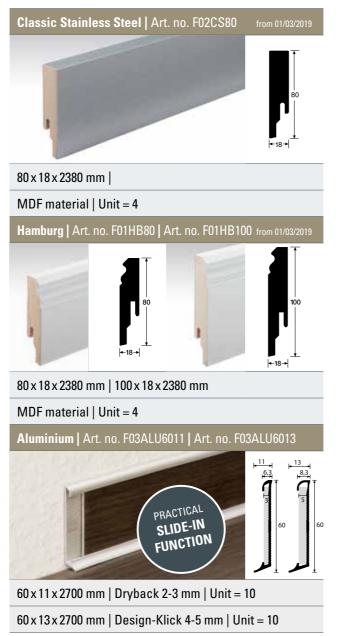

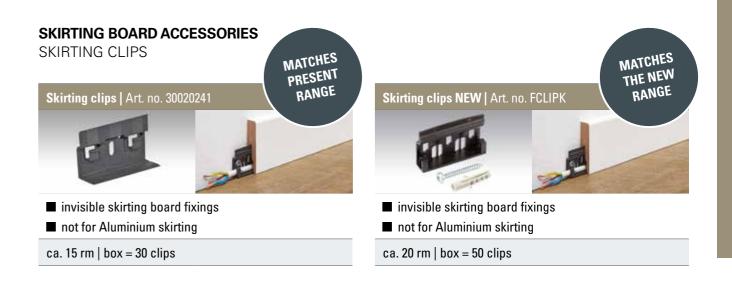

INSIDE AND EXTERNAL CORNERS | END CAPS | CONNECTION PIECES

	Fits perfectly for	Type (self-adhesive)	Unit	Colour	Art. no.
	0	Inside corners	4	White	FIE01-60
	Contrast and	External corners	2	White	FAE01-60
	Waterproof skirting board	End caps	2	White	FAK01-60
	Skirting board	Connection pieces	2	White	FCP01-60
		Inside corners	4	Stainless steel	FIE02-60
	Unity	External corners	2	Stainless steel	FAE02-60
	skirting board	End caps	2	Stainless steel	FAK02-60
Contrast		Connection pieces	2	Stainless steel	FCP02-60
		Inside corners	4	White	FIE01-80
	Classic and Design skirting board	External corners	2	White	FAE01-80
		End caps	2	White	FAK01-80
		Connection pieces	2	White	FCP01-80
	Classic	Inside corners	4	Stainless steel	FIE02-80
		External corners	2	Stainless steel	FAE02-80
	Stainless Steel skirting board	End caps	2	Stainless steel	FAK02-80
Design		Connection pieces	2	Stainless steel	FCP02-80
		Inside corners	4	White	FIE01-80H
	Hamburger 80	External corners	2	White	FAE01-80H
	skirting board	End caps	2	White	FAK01-80H
		Connection pieces	2	White	FCP01-80H
		Inside corners	4	White	FIE01-100H
	Hamburger 100	External corners	2	White	FAE01-100H
ANGELOW PORTON	skirting board	End caps	2	White	FAK01-100H
Hamburg		Connection pieces	2	White	FCP01-100H

FOR PURLINE ORGANIC FLOORING







Design		Fits perfectly for (Decor art. no.)	14.5/50 Art. no.	16/60 Art. no. NEW
Arctic Oak		MLP008R PL008R PLC008R	30060414	F56002UY60
Ascona Pine Nature	Control	PL052R PLC052R	30060515	F58020UY60
Calistoga Cream		PLEW10004 PL054R PLC054R	30060410	F54041UY60
Calistoga Grey		PLEW10003 PL003R PLC003R	30060409	F58010UY60
Calistoga Nature		PLEW10001 PL001R PLC001R	30060407	F54033UY60
Canyon Oak		PLEW10007 PL007R PLC007R	30060413	F54029UY60
Canyon Oak Honey	AND THE	PL076C	30060607	F54029UY60
Canyon Oak Sand		PL075C	30060606	F34009UY60
Carmel Pine		PL048R PLC048R	30060516	F54039UY60
Classic Oak Autumn	Acres to the second	PL073C	30060604	F74007UY60
Classic Oak Spring	S. F. B. C. S.	PL071C	30060602	F34011UY60
Classic Oak Summer	100	PL072C	30060603	F54044UY60
Classic Oak Winter	THE REAL PROPERTY.	PL074C	30060605	F76003UY60
Crafted Oak		PL080C	30060630	F54008UY60
Crystal Pine		PL098C	30060628	F11007UY60
Dacota Oak		PLEW20017 PL017R PLC017R	30060423	F74003UY60
Fashion Oak Cream	11	PL092C	30060622	F34012UY60
Fashion Oak Grey	-	PL093C	30060623	F36012UY60
Fashion Oak Natural		PL091C	30060621	F34016UY60
Garden Oak		PLEW10005 PL005R PLC005R	30060411	F34022UY60
Island Oak Honey		PL043R PLC043R	30060518	F58016UY60
Island Oak Moon	B 5 - 3 - 10	PL045R PLC045R	30060519	F56003UY60
Island Oak Sand		PL044R PLC044R	30060520	F58003UY60
Malmoe Pine	三年(1991)	PLEW20019 PL019R PLC019R	30060425	F34020UY60
Native Ash		PL099C	30060629	F34025UY60
Noble Elm		PL081C	30060611	F74006UY60
Nordic Pine Modern		PL050R PLC050R	30060521	F58019UY60
Nordic Pine Style		PL049R PLC049R	30060522	F11005UY60
Patina Teak		PL046R PLC046R	30060523	F58013UY60
Polar Pine		PL082C	30060612	F56009UY60
Pure Black		PL194C	30060598	F99999UY60

SKIRTING BOARDS

FOR PURLINE ORGANIC FLOORING







Design		Fits perfectly for (Decor art. no.)	14.5/50 Art. no.	16/60 Art. no. NEW
Pure Pine		PL079C	30060610	F11003UY60
Queen's Oak Amber		PL096C	30060626	F34003UY60
Queen's Oak Pearl	The season	PL097C	30060627	F58008UY60
Royal Chestnut Desert	THE REAL	PL085C	30060616	F54019UY60
Royal Chestnut Grey	The state of the s	PL084C	30060615	F78003UY60
Royal Chestnut Mocca	A STATE OF THE STATE OF	PL086C	30060617	F74004UY60
Summer Beech	3.1	PL047R PLC047R	30060524	F54002UY60
Supreme Oak Grey	377	PL070C	30060601	F76002UY60
Supreme Oak Natural		PL068C	30060599	F34006UY60
Supreme Oak Silver		PL069C	30060600	F56007UY60
Traditional Oak Brown		PL051R PLC051R	30060525	F34003UY60
Uptown Pine		PL083C	30060613	F34023UY60
Valley Oak Mud	1	PL042R PLC042R	30060526	F58023UY60
Valley Oak Soil		PL041R PLC041R	30060527	F58012UY60
Village Oak Brown		PL088C	30060619	F74016UY60
Village Oak Cream	6 3 5	PL087C	30060618	F34024UY60
Village Oak Grey	-	PL089C	30060620	F56010UY60
Western Oak Cream	-	PL094C	30060624	F58016UY60
Western Oak Desert	940 4	PL095C	30060625	F54014UY60
Wild Wood		PL100C	30060614	F54005UY60

Adventure Oak Rustic

Ambition Oak Calm

Aumera Oak Dark

Aumera Oak Grey

Aumera Oak Native

Aurelia Cream

Aurelia Grey

Aurelia Provence

Calm Oak Cream

Balearic Wild Oak

Calm Oak Nature

Chateau Brown

Chateau Grey

Chateau White Clay Calm Oak

Comfort Oak Mellow

Compasion Oak Tender

Corn Rustic Oak

Crete Vibrant Oak

Cyprus Dark Oak

Desire Oak Light

Embrace Oak Grey

Emotion Oak Rustic

Energy Oak Warm Eternity Oak Brown

Eternity Oak Grey

Fairytale Stone Pale

Fortune Stone Rusty

Glamour Concrete Modern

Courage Stone Grey

Copenhagen Frosted Pine

Design

FOR DESIGN FLOORING

DB00143 | DLC00143 | MLD00143

DB00141 | DLC00141 | MLD00141

Successive ASSORTMENT CHANGEOVER in 2019		
Fits perfectly for (Decor art. no.)	19/58 Art. no.	16/60 Art. no. NEW
DB00111 DLC00111 MLD00111	30060566	F58016UY60
DB00122 DLC00122 MLD00122	30060575	F36009UY60
DB00027 DLC00027	30060464	F74011UY60
DB00029 DLC00029	30060538	F76004UY60
DB00028 DLC00028	30060467	F58007UY60
DB00006 DLC00006	30060453	F54027UY60
DB00005 DLC00005	30060452	F76004UY60
DB00004 DLC00004	30060451	F58006UY60
DB00010 DLC00010	30060457	F54027UY60
DB00078 DLC00078	30060557	F58021UY60
DB00009 DLC00009	30060456	F34004UY60
DB00002 DLC00002	30060449	F54010UY60
DB00003 DLC00003	30060450	F58015UY60
DB00001 DLC00001	30060448	F34016UY60
DB00062 DLC00062	30060540	F58005UY60
DB00129 DLC00129 MLD00129	30060582	F54012UY60
DB00109 DLC00109 MLD00109	30060558	F74009UY60
DB00076 DLC00076	30060550	F38003UY60
DB00064 DLC00064	30060542	F54031UY60
DB00075 DLC00075	30060558	F74009UY60
DB00137 DLC00137 MLD00137	30060590	F56015UY60
DB00066 DLC00066	30060544	F74014UY60
DB00108 DLC00108 MLD00108	30060563	F58009UY60
DB00110 DLC00110 MLD00110	30060565	F74005UY60
DB00123 DLC00123 MLD00123	30060576	F36010UY60
DB00114 DLC00114 MLD00114	30060569	F54036UY60
DB00120 DLC00120 MLD00120	30060435	F54048UY60
DB00121 DLC00121 MLB00121	30060435	F36011UY60
DB00142 DLC00142 MLD00142	30060595	F56016UY60

30060596

30060594

F74017UY60

F76006UY60

SKIRTING BOARDS

FOR DESIGN FLOORING







21

Design		Fits perfectly for (Decor art. no.)	19/58 Art. no.	16/60 Art. no. NEW
Grace Oak Smooth	Contract of the	DB00106 DLC00106 MLD00106	30060561	F58002UY60
Harmony Stone Sandy		DB00134 DLC00134 MLD00134	30060587	F34030UY60
Helsinki Rustic Oak		DB00068 DLC00068	30060546	F36007UY60
Hero Stone Gloomy		DB00138 DLC00138 MLD00138	30060591	F76005UY60
Honey Warm Maple		DB00081 DLC00081	30060553	F54045UY60
Infinity Dark Solid		DB00073	30060548	F58017UY60
Infinity Light Solid		DB00074	30060549	F34007UY60
Inspiration Oak Clear		DB00113 DLC00113 MLD00113	30060568	F34027UY60
Intuition Oak Brown	7.	DB00130 DLC00130 MLD00130	30060583	F54044UY60
Joy Oak Tender	-	DB00126 DLC00126 MLD00126	30060579	F54016UY60
Kindness Oak Pure		DB00125 DLC00125 MLD00125	30060578	F34010UY60
Liberation Oak Timeless	a trains	DB00128 DLC00128 MLD00128	30060581	F54007UY60
Luck Oak Sandy		DB00127 DLC00127 MLD00127	30060580	F34010UY60
Lund Dusty Oak		DB00065 DLC00065	30060543	F58007UY60
Magic Stone Cloudy	Marine Control	DB00136 DLC00136 MLD00136	30060589	F34031UY60
Memory Oak Silver	COL	DB00132 DLC00132 MLD00132	30060585	F58007UY60
Miracle Oak Dry	3 L 3 18	DB00117 DLC00117 MLD00117	30060572	F76002UY60
Moonlight Pine Pale	Contraction of the second	DB00104 DLC00104	30060435	F36008UY60
Mud Rustic Oak		DB00063 DLC00063	30060541	F54043UY60
Paradise Oak Essential	-	DB00112 DLC00112 MLD00112	30060567	F58018UY60
Patience Concrete Pure	N. F. St.	DB00139 DLC00139 MLD00139	30060592	F38005UY60
Ponza Smoky Oak	LACK P	DB00067 DLC00067	30060545	F76004UY60
Riga Vibrant Pine	1000	DB00082 DLC00082	30060554	F56008UY60
Romance Oak Brilliant		DB00119 DLC00119 MLD00119	30060574	F54006UY60
Salt Lake Oak		DB00079 DLC00079	30060549	F34007UY60
Santorini Deep Oak		DB00061 DLC00061	30060539	F74002UY60
Sardinia Wild Walnut		DB00083 DLC00083	30060555	F74008UY60
Scandic Grey	1 2 - 5	DB00025 DLC00025	30060398	F78002UY60
Scandic White		DB00026 DLC00026	30060463	F34014UY60
Sicily Dark Oak		DB00069 DLC00069	30060547	F78005UY60
Silence Oak Beige		DB00124 DLC00124 MLD00124	30060577	F34008UY60

FOR DESIGN FLOORING







Design		Fits perfectly for (Decor art. no.)	19/58 Art. no.	16/60 Art. no. NEW
Soul Apple Mellow	19	DB00107 DLC00107 MLD00107	30060562	F54046UY60
Spirit Oak Silver		DB00115 DLC00115 MLD00115	30060570	F58013UY60
Starlight Oak Soft		DB00116 DLC00116 MLD00116	30060571	F56011UY60
Summer Oak Golden		DB00118 DLC00118 MLD00118	30060573	F54024UY60
Toscany Pine		DB00007 DLC00007	30060454	F58018UY60
Toscany Pine Grey	THE POPULAR	DB00008 DLC00008	30060455	F58014UY60
Valour Oak Smokey	CONTRACTOR OF THE PARTY OF THE	DB00133 DLC00133 MLD00133	30060586	F78004UY60
Venero Oak Beige		DB00013 DLC00013	30060458	F54014UY60
Venero Oak Brown	THE REAL PROPERTY.	DB00014 DLC00014	30060451	F54035UY60
Victoria Oak Grey		DB00030 DLC00030	30060467	F56004UY60
Victoria Oak Native		DB00031 DLC00031	30060458	F54032UY60
Victoria Oak White	Black of	DB00032 DLC00032	30060469	F36005UY60
Vision Concrete Chill		DB00135 DLC00135 MLD00135	30060588	F58024UY60
Wheat Golden Oak	A STATE OF THE PARTY OF THE PAR	DLC00080 DB00080	30060552	F54050UY60
Wisdom Concrete Dusky		DB00140 DLC00140 MLD00140	30060593	F36013UY60
Wish Oak Smooth		DB00131 DLC00131 MLD00131	30060584	F58010UY60
Woodstock Cream		DB00024 DLC00024	30060461	F34010UY60
Woodstock Honey	1	DB00023 DLC00023	30060460	F54036UY60

SKIRTING BOARDS

FOR LAMINATE FLOORING







Design		Fits perfectly for (Decor art. no.)	18.5/38.5 Art. no.	16/60 Art. no. NEW
Acacia		LA022M LA022MC	30030320	F56006UY60
Alaska Oak		LA054LV2	30030353	F56005UY60
Alder Romantic		LA033M LA033MC	30030331	F01CT60 (weiß)
American Pecan		LA055LV2	30030354	F54042UY60
Ascona Pine Grey		LA018 LA018C LA018MV2	30030383	F58014UY60
Ascona Pine Nature		LA036M LA036MC LA036MV2	30030334	F58018UY60
Avenue Oak		LA015 LA015C	30030380	F34004UY60
Beech Natural		LA003 LA003C	30030368	F34013UY60
Bergamo Oak		LA032M LA032MC	30030330	F54015UY60
Californian Oak	7 1 Sept 1	LA006 LA006C	30030371	F54031UY60
Canadian Maple		LA001 LA001C	30030366	F34005UY60
Classic Beech		LA004 LA004C	30030323	F54002UY60
Classic Cherry		LA011 LA011C	30030376	F54034UY60
Classic Oak		LA010 LA010C	30030375	F54008UY60
Coastal Oak		LA028M LA028MC	30030326	F58015UY60
Columbian Beech		LA056LV2	30030355	F34021UY60
Cornish Oak		LA030M LA030MC	30030328	F54020UY60
Country Oak		LA052LV2	30030351	F54008UY60
Denali Pine		LA063XLV4	30030362	F38002UY60
Garden Oak		LA027M LA027MC	30030325	F54029UY60
Globetrotter		LA023M LA023MC	30030321	F54037UY60
Husky Oak		LA038M LA038MC	30030336	F36003UY60
Kahlua Oak		LA029M LA029MC	30030327	F01CT60 (weiß)
Lumber Grey		LA035M LA035MC	30030333	F58010UY60
Lumber White		LA017 LA017C LA017MV2	30030382	F36004UY60
Malmoe Pine	-0-	LA064XLV4	30030363	F11006UY60
Mexican Oak	- W	LA031M LA031MC	30030329	F74012UY60
Michigan Oak		LA057LV2	30030356	F01CT60 (weiß)
Modern Hickory		LA013 LA013C	30030378	F74016UY60
Natural Walnut	1	LA012 LA012C	30030377	F74010UY60
Noble Maple		LA002 LA002C	30030367	F34017UY60

FOR LAMINATE FLOORING







Design		Fits perfectly for (Decor art. no.)	18.5/38.5 Art. no.	16/60 Art. no. NEW
Nordic Pine Modern		LA020 LA020C	30030385	F54003UY60
Nordic Pine Nature		LA019 LA019C	30030384	F34023UY60
Oak Champagne		LA051LV2	30030350	F54040UY60
Oak Grey		LA026M LA026MC	30030324	F58013UY60
Oak Wave Cream	1000	LA059LV2	30030358	F58008UY60
Ocean Beech	PALE	LA025M LA025MC	30030323	F34033UY60
Ocean Oak		LA079MV2	30030386	F34033UY60
Ontario Oak		LA053LV2	30030370	F01CT60 (weiß)
Oxford Oak		LA040M LA040MC	30030338	F54018UY60
Pepper Oak		LA060LV2	30030359	F76004UY60
Portuguese Oak		LA058LV2	30030357	F11002UY60
Salt Oak		LA047SV4	30030346	F38004UY60
Scottish Oak	1	LA005 LA005C LA005MV2	30030370	F54027UY60
Storm Oak		LA021M LA021MC	30030319	F58010UY60
Swedish Pine		LA049SV4	30030348	F34002UY60
Tennessee Oak Platinum	The state of the s	LA065XLV4	30030364	F74013UY60
Tennessee Oak Smoked	484	LA066XLV4	30030332	F74002UY60
Tirol Oak Cream		LA043SV4 LA043LV2 LA043XLV4 LA043MV2	30030386	F54032UY60
Tirol Oak Grey	The same of the sa	LA041SV4 LA041LV2 LA041XLV4 LA041MV2	30030340	F36006UY60
Tirol Oak Honey		LA044SV4 LA044LV2 LA044XLV4	30030343	F54038UY60
Tirol Oak Nature		LA042SV4 LA042LV2 LA042XLV4	30030341	F54016UY60
Tirol Oak Silver		LA045SV4 LA045LV2 LA045XLV4 LA045MV2	30030344	F58007UY60
Tirol Oak White		LA046SV4 LA046LV2 LA046XLV4 LA046MV2	30030345	F36002UY60
Traditional Oak Brown		LA024M LA024MC LA024SV4 LA024XLV4 LA024MV2	30030322	F34003UY60
Traditional Oak Grey		LA048SV4	30030347	F74005UY60
Virginia Oak		LA061LV2 LA061MV2	30030360	F54009UY60
Walnut Classic	137957	LA034M LA034MC	30030332	F74006UY60
Washed Oak	STATE OF THE PARTY	LA050LV2 LA050MV2	30030353	F56005UY60
Welsh Dark Oak		LA009 LA009C LA009SV4	30030333	F58010UY60
Welsh Pale Oak		LA008 LA008C LA008SV4	30030373	F54013UY60
White Desire		LA037M LA037MC	30030335	F34008UY60

SKIRTING BOARDS

FOR LAMINATE FLOORING







Design	Fits perfectly for (Decor art. no.)	18.5/38.5 Art. no.	16/60 Art. no. NEW
White Oak	LA007 LA007C	30030372	F11004UY60
Yale Oak	LA039M LA039MC	30030337	F54016UY60

SKIRTING BOARDS

FOR LAMINATE FLOORING







ROCK'N'SO

Design		Fits perfectly for (Decor art. no.)	15/70 Art. no.	16/60 Art. no. NEW
Born to be wild		LA151SYS	30040448	F01CT60 (weiß)
Dancing in the Dark		LA149SYSV4	30040440	F99999UY60
Here comes the sun		LA145SYSV4	30040444	F54049UY60
Hotel California	19 3	LA144SYSV4	30040443	F34005UY60
House of the rising sun	70	LA143SYSV4	30040442	F34028UY60
I was made for loving you	-	LA147SYSV4	30040446	F56013UY60
Knocking on heavens door		LA148SYSV4	30040439	F01CT60 (weiß)
London Calling		LA150SYSV4	30040447	F58022UY60
Man on the Moon	- 10	LA142SYSV4	30040441	F36011UY60
Paint it Black		LA153SYS	30040450	F99999UY60
Under Pressure		LA152SYS	30040449	F01CT60 (weiß)
Whiskey in the Jar		LA146SYSV4	30040445	F54030UY60

PREMIUM PROFILES

TRANSITION PROFILES & ADJUSTMENT PROFILES

TRANS	TRANSITION PROFILES												
Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.	Packers (up to 18 mm)					
To 1/2	Hard flooring/ multilayers (6 - 13 mm)	Transition	V>	Silver	1000	36	PPHA1Silb	PPEBlocSilb					
2000		profile	#	Silver	2700	36	PPHA27Silb	PPEBlocSilb					
201				Stainless steel	1000	36	PPHA1Edel	PPEBlocEdelMe					
1/4				Stainless steel	2700	36	PPHA27Edel	PPEBlocEdelMe					
				Brass	1000	36	PPHA1Mess	PPEBlocEdelMe					
- Mari				Brass	2700	36	PPHA27Mess	PPEBlocEdelMe					
Doorways/	Elastic	Transition	V> }	Silver	1000	27	PPEA1Silb						
thresholds same	flooring for clicking in	profile		Silver	2700	27	PPEA27Silb						
flooring height	(3.5 - 8.5 mm)			Stainless steel	1000	27	PPEA1Edel						
noight				Stainless steel	2700	27	PPE27Edel						
				Brass	1000	27	PPEA1Mess						
				Brass	2700	27	PPEA27Mess						
	Elastic	Expansion	(*)	Silver	2500	10	PPDD25Silb						
	flooring for gluing (3 mm)	joint											

ADJUSTMENT PROFILES												
Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.	Packers (up to 18 mm)				
	Hard	Adjustment	V> }	Silver	1000	44	PPHB1Silb	PPEBlocSilb				
	flooring/ multilayers	profile	#	Silver	2700	44	PPHB27Silb	PPEBlocSilb				
	(6 - 13 mm)			Stainless steel	1000	44	PPHB1Edel	PPEBlocEdelMe				
				Stainless steel	2700	44	PPHB27Edel	PPEBlocEdelMe				
				Brass	1000	44	PPHB1Mess	PPEBlocEdelMe				
				Brass	2700	44	PPHB27Mess	PPEBlocEdelMe				
Doorways/	Elastic	Adjustment	V> }	Silver	1000	34	PPEB1Silb					
thresholds different	for clicking in (3.5 - 8.5 mm)	profile	 	Silver	2700	34	PPEB27Silb					
flooring heights				Stainless steel	1000	34	PPEB1Edel					
neignis				Stainless steel	2700	34	PPEB27Edel					
				Brass	1000	34	PPEB1Mess					
				Brass	2700	34	PPEB27Mess					

PREMIUM PROFILES

END PROFILE

END PROFILES												
Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.	Packers (up to 18 mm)				
	Hard	End strip	V> >	Silver	1000	25	PPHC1Silb	PPEBlocSilb				
multi	flooring/ multilayers			Silver	2700	25	PPHC27Silb	PPEBlocSilb				
	(6 - 13 mm)			Stainless steel	1000	25	PPHC1Edel	PPEBlocEdelMe				
				Stainless steel	2700	25	PPHC27Edel	PPEBlocEdelMe				
				Brass	1000	25	PPHC1Mess	PPEBlocEdelMe				
				Brass	2700	25	PPHC27Mess	PPEBlocEdelMe				
Flooring	Elastic	End strip	V> }	Silver	1000	23	PPEC1Silb					
depth windows	flooring for clicking in			Silver	2700	23	PPEC27Silb					
	(3.5 - 8.5 mm)			Stainless steel	1000	23	PPEC1Edel					
				Stainless steel	2700	23	PPEC27Edel					
				Brass	1000	23	PPEC1Mess					
				Brass	2700	23	PPEC27Mess					
	Elastic	L-shaped	√	Silver	2500	23	PPDL25Silb					
	flooring for gluing (3 mm)	end strip										



Minimum order quantity = 1 Minimum order quantity = 1

COMFORT PROFILES
TRANSITION PROFILE SELF ADHESIVE | STAIR NOSING & ANGLED PROFILES

TRANSITION PROFILE SELF-ADHESIVE												
Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.					
	Hard	Transition		Silver	1000	30	PCHA1Silb					
	multilayers	profile (smooth)	*	Silver	2700	30	PCHA27Silb					
	(6 - 13 mm)			Stainless steel	1000	30	PCHA1Edel					
				Stainless steel	2700	30	PCHA27Edel					
				Brass	1000	30	PCHA1Mess					
100				Brass	2700	30	PCHA27Mess					
Doorways/	Elastic	Transition		Silver	1000	25	PCEA1Silb					
thresholds same	flooring for clicking in	profile (fluted)	₩	Silver	2700	25	PCEA27Silb					
flooring height	or gluing (0 - 10 mm)			Stainless steel	1000	25	PCEA1Edel					
noigni	(0 10111111)			Stainless steel	2700	25	PCEA27Edel					
				Brass	1000	25	PCEA1Mess					
				Brass	2700	25	PCEA27Mess					

STAIR	STAIR NOSING PROFILE & ANGLED PROFILE												
Application	Fits perfectly for	Product type	Fixing	Colour	Length (mm)	Width (mm)	Art. no.						
34	Hard flooring/ multilayers (7 - 15 mm)	Stair nosing profile	V> } ******	Silver	2500	30 x 25	PPHT25Silb						
Stair end piece	Elastic flooring for clicking in (6 - 6,5 mm)			Silver	2500	43,5	PPET25Silb						
	Elastic flooring for gluing (2,5 mm)			Silver	2500	39,5	PPDT25Silb						
1	Hard flooring/ multilayers	Angled profile		Silver	2700	15 x 8,5	PCW27Silb1						
Plinths/	Elastic flooring for clicking in			Silver	2700	24,5 x 15	PCW27Silb2						
	Elastic flooring for gluing												











STAIR NOSING

TYPE A FOR WINEO 400 AND WINEO 1000



Stair nose A has a single return, cannot be connected on the leading edge, and forms a closed, straight end piece.

■ non-slip thanks to R9 surface, durable, easy to clean

Ordering:


- When ordering, please provide the article number of the stair type and the decor code for the flooring.
- Delivery is approximately 2 weeks.

haracterist	tics						
wood Con	nect	wineo 400	wood XL (Connect	wineo 400	stone Con	nect
20080852		Art. no.:	0080855		Art. no.:	20080858	
4.5 mm		Thickness:	4.5 mm		Thickness:	4.5 mm	
1212 mm		Length:	1507 mm		Length:	1200 mm	
TYPE A	ca. 144 mm*	Width:	TYPE A	ca. 192 mm*	Width:	TYPE A	ca. 273 mm*
TYPE B	ca. 150 mm*		TYPE B	ca. 198 mm*		TYPE B	ca. 279 mm*
TYPE C	ca. 123 mm**		TYPE C	ca. 171 mm**		TYPE C	ca. 252 mm**
wood Mul	ti-Layer	wineo 400	wood XL I	Multi-Layer	wineo 400	stone Mul	ti-Layer
20080861		Art. no.:	20080864		Art. no.:	20080867	
9 mm		Thickness:	9 mm		Thickness:	9 mm	
1222 mm		Length:	1520 mm		Length:	1202 mm	
TYPE A	ca. 139 mm*	Width:	TYPE A	ca. 187 mm*	Width:	TYPE A	ca. 267 mm*
TYPE B	ca. 145 mm*		TYPE B	ca. 193 mm*		TYPE B	ca. 273 mm*
TYPE C	ca. 118 mm**		TYPE C	ca. 166 mm**		TYPE C	ca. 246 mm**
wood Co	nnect	wineo 1000	wood XXL	. Multi-Layer	wineo 1000	stone Co	nnect
20080873		Art. no.:	20080870		Art. no.:	20080876	
5 mm		Thickness:	9 mm		Thickness:	5 mm	
1295 mm		Length:	1845 mm		Length:	859 mm	
TYPE A	ca. 152 mm*	Width:	TYPE A	ca. 194 mm*	Width:	TYPE A	ca. 354 mm*
TYPE B	ca. 155 mm*		TYPE B	ca. 200 mm*		TYPE B	ca. 360 mm*
TYPE C	ca. 132 mm**		TYPE C	ca. 174 mm**		TYPE C	ca. 333 mm**
	20080852 4.5 mm 1212 mm TYPE A TYPE B TYPE C Wood Mu 20080861 9 mm 1222 mm TYPE A TYPE B TYPE C 20080873 5 mm 1295 mm TYPE A TYPE B	1212mm TYPE A	wood Connect wineo 400 w	wood Connect wineo 400 wood XL 0 20080852 Art. no.: 0080855 4.5 mm Thickness: 4.5 mm 1212 mm Length: 1507 mm TYPE A ca. 144 mm* Width: TYPE A TYPE B ca. 150 mm* TYPE B TYPE C ca. 123 mm** TYPE C wood Multi-Layer wineo 400 wood XL I 20080861 Art. no.: 20080864 9 mm Thickness: 9 mm 1222 mm Length: 1520 mm TYPE A ca. 139 mm* Width: TYPE A TYPE B ca. 145 mm* TYPE C 20080873 Art. no.: 20080870 5 mm Thickness: 9 mm 1295 mm Length: 1845 mm TYPE A ca. 152 mm* Width: TYPE A TYPE B ca. 155 mm* TYPE B	wood Connect wineo 400 wood XL Connect 20080852 Art. no.: 0080855 4.5 mm Thickness: 4.5 mm 1212 mm Length: 1507 mm TYPE A ca. 144 mm* Width: TYPE A ca. 192 mm* TYPE B ca. 150 mm* TYPE B ca. 198 mm* TYPE C ca. 123 mm** TYPE C ca. 171 mm** wood Multi-Layer wineo 400 wood XL Multi-Layer 20080861 Art. no.: 20080864 9 mm Thickness: 9 mm 1222 mm Length: 1520 mm TYPE A ca. 139 mm* Width: TYPE A ca. 187 mm* TYPE B ca. 145 mm* TYPE C ca. 166 mm** Wood Connect wineo 1000 wood XXL Multi-Layer 20080873 Art. no.: 20080870 5 mm Thickness: 9 mm 1295 mm Length: 1845 mm TYPE A ca. 152 mm* Width: TYPE A ca. 194 mm* TYPE B ca. 155 mm* TYPE B ca. 200 mm*	wood Connect wineo 400 wood XL Connect wineo 400 september 1000 wood XXL Connect wineo 400 september 1000 wood XXL Connect wineo 1000 wood XXL Connect	wood Connect wineo 400 wood XL Connect wineo 400 stone Con 20080852 Art. no.: 0080855 Art. no.: 20080858 4.5mm Thickness: 4.5mm Thickness: 4.5mm 1212mm Length: 1507 mm Length: 1200 mm TYPE A ca. 144 mm* Width: TYPE A ca. 192 mm* Width: TYPE A TYPE B ca. 150 mm* TYPE B ca. 198 mm* TYPE B TYPE B TYPE C ca. 123 mm** TYPE C ca. 171 mm** TYPE C TYPE C wood Multi-Layer wineo 400 wood XL Multi-Layer wineo 400 stone Multi-Layer Wineo 400 stone Multi-Layer Wineo 400 stone Multi-Layer 20080861 Art. no.: 20080864 Art. no.: 20080867 9mm Thickness: 9mm Thickness: 9mm TYPE A ca. 139 mm* Width: TYPE A TYPE B ca. 145 mm** TYPE B ca. 193 mm* TYPE B TYPE C ca. 166 mm** TYPE C vineo 1000 stone Co

STAIR NOSING

TYPE B FOR WINEO 400 AND WINEO 1000





Stair nose B has a single return and can be connected on both the leading and rear edges. This allows continuous installation on block stairs.

■ non-slip thanks to R9 surface, durable, easy to clean

Ordering:

- When ordering, please provide the article number of the stair type and the decor code for the flooring.
- Delivery is approximately 2 weeks.

Technical c	haracterist	tics							
wineo 400 v	wood Con	nect	wineo 400	wood XL (Connect	wineo 400	wineo 400 stone Connect		
Art. no.:	20080853		Art. no.:	20080856		Art. no.:	20080859		
Thickness:	4.5 mm		Thickness:	4.5 mm		Thickness:	4.5 mm		
Length:	1212 mm		Length:	1507 mm		Length:	1200 mm		
Width:	TYPE A	ca. 144 mm*	Width:	TYPE A	ca. 192 mm*	Width:	TYPE A	ca. 273 mm*	
	TYPE B	ca. 150 mm*		TYPE B	ca. 198 mm*		TYPE B	ca. 279 mm*	
	TYPE C	ca. 123 mm**		TYPE C	ca. 171 mm**		TYPE C	ca. 252 mm**	
wineo 400 v	wood Mul	ti-Layer	wineo 400	wood XL I	Multi-Layer	wineo 400	stone Mul	ti-Layer	
Art. no.:	20080862		Art. no.:	20080865		Art. no.:	20080868		
Thickness:	9 mm		Thickness:	9 mm		Thickness:	9 mm		
Length:	1222 mm		Length:	1520 mm		Length:	1202 mm		
Width:	TYPE A	ca. 139 mm*	Width:	TYPE A	ca. 187 mm*	Width:	TYPE A	ca. 267 mm*	
	TYPE B	ca. 145 mm*		TYPE B	ca. 193 mm*		TYPE B	ca. 273 mm*	
	TYPE C	ca. 118 mm**		TYPE C	ca. 166 mm**		TYPE C	ca. 246 mm**	
wineo 1000	wood Co	nnect	wineo 1000	wood XXL	. Multi-Layer	wineo 1000	stone Co	nnect	
Art. no.:	20080874		Art. no.:	20080871		Art. no.:	20080877		
Thickness:	5 mm		Thickness:	9 mm		Thickness:	5 mm		
Length:	1295 mm		Length:	1845 mm		Length:	859 mm		
Width:	TYPE A	ca. 152 mm*	Width:	TYPE A	ca. 194 mm*	Width:	TYPE A	ca. 354 mm*	
	TYPE B	ca. 155 mm*		TYPE B	ca. 200 mm*		TYPE B	ca. 360 mm*	
	TYPE C	ca. 132 mm**		TYPE C	ca. 174 mm**		TYPE C	ca. 333 mm**	

STAIR NOSING

TYPE C FOR WINEO 400 AND WINEO 1000 UP TO 5 MM THICKNESS



Stair nose C has a double return and is suitable for underlays up to 5 mm.

This variant cannot be connected on the leading edge, forming a closed, straight end piece.

■ non-slip thanks to R9 surface, durable, easy to clean

Ordering:

- When ordering, please provide the article number of the stair type and the decor code for the flooring.
- Delivery is approximately 2 weeks.

Technical o	haracterist	tics							
wineo 400	wood Con	nect	wineo 400	wood XL (Connect	wineo 400	wineo 400 stone Connect		
Art. no.:	20080854		Art. no.:	20080857	,	Art. no.:	20080860		
Thickness:	4.5 mm		Thickness:	4.5 mm		Thickness:	4.5 mm		
Length:	1212 mm		Length:	1507 mm		Length:	1200 mm		
Width:	TYPE A	ca. 144 mm*	Width:	TYPE A	ca. 192 mm*	Width:	TYPE A	ca. 273 mm*	
	TYPE B	ca. 150 mm*		TYPE B	ca. 198 mm*		TYPE B	ca. 279 mm*	
	TYPE C	ca. 123 mm**		TYPE C	ca. 171 mm**		TYPE C	ca. 252 mm**	
wineo 1000	wood Co	nnect	wineo 1000	stone Co	nnect				
Art. no.:	20080875		Art. no.:	20080878					
Thickness:	5 mm		Thickness:	5 mm					
Length:	1295 mm		Length:	859 mm					
Width:	TYPE A	ca. 152 mm*	Width:	TYPE A	ca. 354 mm*				
	TYPE B	ca. 155 mm*		TYPE B	ca. 360 mm*				
	TYPE C	ca. 132 mm**		TYPE C	ca. 333 mm**				
wineo 1000 Art. no.: Thickness: Length:	TYPE B TYPE C wood Co 20080875 5 mm 1295 mm TYPE A TYPE B	ca. 150 mm* ca. 123 mm** nnect ca. 152 mm* ca. 155 mm*	wineo 1000 Art. no.: Thickness: Length:	TYPE B TYPE C Stone Co 20080878 5 mm 859 mm TYPE A TYPE B	ca. 198 mm* ca. 171 mm** nnect ca. 354 mm* ca. 360 mm*		TYPE B	ca. 279 mm*	

STAIR NOSING

TYPE C FOR WINEO 400 AND WINEO 1000 UPTO 9 MM THICKNESS




Stair nose C has a double return and is suitable for underlays up to 9 mm. This variant cannot be connected on the leading edge, forming a closed, straight end piece.

■ non-slip thanks to R9 surface, durable, easy to clean

Ordering:

- When ordering, please provide the article number of the stair type and the decor code for the flooring.
- Delivery is approximately 2 weeks.

Technical characteristics										
wineo 400 wood Multi-Layer			wineo 400	wood XL I	Multi-Layer	wineo 400	wineo 400 stone Multi-Layer			
Art. no.:	20080863		Art. no.:	20080866		Art. no.:	20080869			
Thickness:	9 mm		Thickness:	9 mm		Thickness:	9 mm			
Length:	1222 mm		Length:	1520 mm		Length:	1202 mm			
Width:	TYPE A	ca. 139 mm*	Width:	TYPE A	ca. 187 mm*	Width:	TYPEA	ca. 267 mm*		
	TYPE B	ca. 145 mm*		TYPE B	ca. 193 mm*		TYPE B	ca. 273 mm*		
	TYPE C	ca. 118 mm**		TYPE C	ca. 166 mm**		TYPE C	ca. 246 mm**		
wineo 1000	wood XXL	Multi-Layer								
Art. no.:	20080872									
Thickness:	9 mm									
Length:	1845 mm									
Width:	TYPE A	ca. 194 mm*								
	TYPE B	ca. 200 mm*								
	TYPE C	ca. 174 mm**								

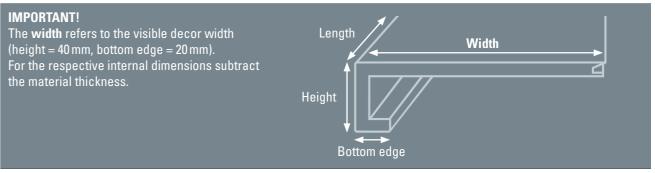

Skirting boards | External corner Inside corners | Weld rods

SKIRTING BOARDS | EXTERNAL CORNERS | INSIDE CORNERS | WELD RODS

- available for all wineo 1500 roll designs
- uniform rounding due to machine-finished reinforcement
- very robust no additional supporting profile
- high stability in corner area, no maintenance joint
- elastic material compensates screed sink
- practical skirting dimensions from 2.40 m long no customising of strips
- flush thresholds guaranteed
- materials do not need to be heated during installation
- also available as acoustic variant for PURLINE flooring with integrated underlay
- no additional templates required
- order-specific scope of delivery



Technical characteristics	Skirting boards	External corners	Inside corners	Welding rods
Height	100 mm	100 mm	100 mm	4 mm
Width	100 mm	100 mm	100 mm	4 mm
Length	2400 mm	230 mm je Seite	210 mm je Seite	60 m / Roll

Design	Fits perfectly	for	Skirting board	External corner	Inside corner	Welding rods
Apple Green	PLR185C	A SASTA	PH185	PEA185	PEI185	PS185
Apple Green Acoustic	PLR185CACT	The state of	PH185ACT	PEA185ACT	PEI185ACT	PS185
Bright.One	PLR115C		PH115	PEA115	PEI115	PS115
Bright.Two	PLR116C		PH116	PEA116	PEI116	PS116
Bright.Three	PLR117C	12000	PH117	PEA117	PEI117	PS117
Bright.Four	PLR118C		PH118	PEA118	PEI118	PS118
Cappuccino	PLR004C		PH004	PEA004	PEI004	PS004
Cool.One	PLR107C		PH107	PEA107	PEI107	PS107
Cool.Two	PLR108C		PH108	PEA108	PEI108	PS108
Cool.Three	PLR109C	4 12 13	PH109	PEA109	PEI109	PS109
Cool.Four	PLR110C	1	PH110	PEA110	PEI110	PS110
Cottage Oak	PLR038C	-	PH038	PEA038	PEI038	PS038
Denim Blue Stars	PLR132C		PH132	PEA132	PEI132	PS132
Denim Blue Stars Acoustic	PLR132CACT		PH132ACT	PEA132ACT	PEI132ACT	PS132
Floating Wood Sand	PLR134C		PH134	PEA134	PEI134	PS134
Floating Wood Snow	PLR133C		PH133	PEA133	PEI133	PS133
Halifax Oak	PLR036C		PH036	PEA036	PEI036	PS036
Halifax Oak Acoustic	PLR036CACT		PH036ACT	PEA036ACT	PEI036ACT	PS036
Honey Mustard	PLR128C		PH128	PEA128	PEI128	PS128
Jungle Green	PLR018C		PH018	PEA018	PEI018	PS018
Light Grey	PLR021C		PH021	PEA021	PEI021	PS021

Design	Fits perfectly	for	Skirting board	External corner	Inside corner	Welding rods
Light Grey Acoustic	PLR021CACT		PH021ACT	PEA021ACT	PEI021ACT	PS021
Melange	PLR003C		PH003	PEA003	PEI003	PS003
Midnight Grey	PLR024C		PH024	PEA024	PEI024	PS024
Midnight Grey Stars	PLR126C		PH126	PEA126	PEI126	PS126
Midnight Grey Stars Acoustic	PLR126CACT		PH126ACT	PEA126ACT	PEI126ACT	PS126
Missouri Oak	PLR039C	Contract of	PH039	PEA039	PEI039	PS039
Napa Walnut Brown	PLR136C		PH136	PEA136	PEI136	PS136
Napa Walnut Cream	PLR135C		PH135	PEA135	PEI135	PS135
Navi Blue	PLR129C		PH129	PEA129	PEI129	PS129
Navi Blue Stars	PLR131C		PH131	PEA131	PEI131	PS131
Pacific Oak	PLR037C		PH037	PEA037	PEI037	PS037
Pacific Oak Acoustic	PLR037CACT		PH037ACT	PEA037ACT	PEI037ACT	PS037
Pure Black Stars	PLR127C		PH127	PEA127	PEI127	PS127
Pure White	PLR025C		PH025	PEA025	PEI025	PS025
Pure White Stars	PLR123C		PH123	PEA123	PEI123	PS123
Pure.One	PLR111C		PH111	PEA111	PEI111	PS111
Pure.Two	PLR112C		PH112	PEA112	PEI112	PS112
Pure.Three	PLR113C		PH113	PEA113	PEI113	PS113
Pure.Four	PLR114C		PH114	PEA114	PEI114	PS114
Racing Green	PLR019C		PH019	PEA019	PEI019	PS019
Red Rubin	PLR011C		PH011	PEA011	PEI011	PS011
Silver Grey	PLR022C		PH022	PEA022	PEI022	PS022
Silver Grey Acoustic	PLR022CACT	3000	PH022ACT	PEA022ACT	PEI022ACT	PS022
Silver Grey Stars	PLR124C		PH124	PEA124	PEI124	PS124
Silver Grey Stars Acoustic	PLR124CACT		PH124ACT	PEA124ACT	PEI022ACT	PS124
Sinai Sand	PLR002C		PH002	PEA002	PEI002	PS002
Sinai Sand Acoustic	PLR002C		PH002ACT	PEA002ACT	PEI002ACT	PS002
Sinai Sand Stars	PLR130C		PH130	PEA130	PEI130	PS130
Steel Grey	PLR023C		PH023	PEA023	PEI023	PS023
Summer Sky	PLR014C		PH014	PEA014	PEI014	PS014
Terracotta Dark	PLR009C		PH009	PEA009	PEI009	PS009
Terracotta Dark Acoustic	PLR009CACT		PH009ACT	PEA009ACT	PEI009ACT	PS009
Warm.One	PLR119C		PH119	PEA119	PEI119	PS119
Warm.Two	PLR120C		PH120	PEA120	PEI120	PS120
Warm.Three	PLR121C		PH121	PEA121	PEI121	PS121
Warm.Four	PLR122C		PH122	PEA122	PEI122	PS122


FLASH COVING

36

The flash coving set makes installing the basin-like skirtings easier. These accessories ensure perfect and accurate external and inside corners.





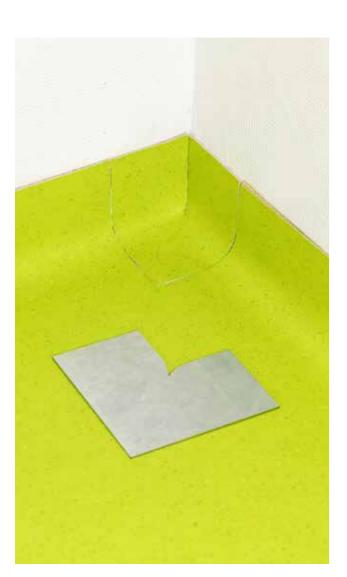

All products from the Flash Coving Set are also available individually:



Technical characteristics

Unit: 1 inside corner template,

1 template for relieving material tension

Hollow profile strip for flash coving | Art. no. 20080458



Technical characteristics

Format: B 15 mm x H 15 mm x L 2500 mm

Unit: 20 pieces

Sealant | Art. no. 20080793



Technical characteristics


Content: 300 g (1 cartridge contains approx. 10 rm)

Unit: 1 cartridge

available for all wineo 1500 roll decors

FEATURE STRIPS

When installed between the panels, the feature strips create outstanding effects from an authentic plank or tile look to optically extending the length of the room. Whether in discrete colours or sharp contrast, the feature strips must be glued with all elastic wineo flooring.

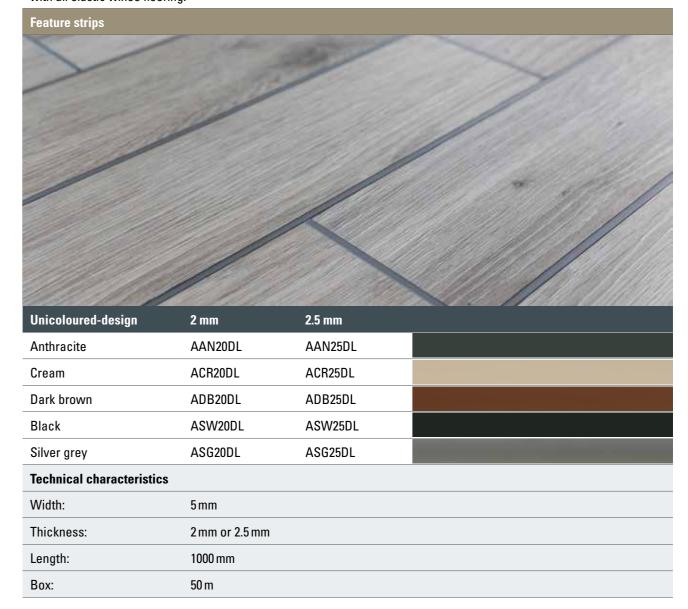

INSTALLATION TOOLS | CLEANING AND REPAIR

■ LAMINATE FLOORING ■ DESIGN FLOORING ORGANIC FLOORING

Rubber hammer | Art. no. 20021004

Blue Marlin knife | Art. no. 20021003



■ the essential tool for professionals – the rubber hammer

■ the professional knife for installing flooring (supplied without blade)

Round cord | Art. no. 20080300






 \blacksquare approx. 6 mm Ø, 10 m length, insert for expansion joints, for sealing with acrylic paste



contains: flooring wiper, microfibre mop, PU cleaner, spray bottle (empty)

Hard wax repair set, colour | Art. no. 10040063





■ 20 x 4 cm long hard wax sticks in a range of colours, can be blended




■ 4 cm long hard and soft wax sticks (3 of each) and 8 cm filler (2 pieces)

Assembly aid pro | Art. no. 10030652



■ with practical handle – makes installing click-in flooring easier





■ PU cleaner 750 ml – replacement order for the cleaning set

Gas soldering iron pro | Art. no. 10040101



■ professional gas soldering iron for heating up and working hard wax

Assembly aid | Art. no. 10030657



■ solid wood, improves installation of elastic flooring for clicking-in

Micro-fibre mop (separate) | Art. no. 10040066



■ replacement micro-fibre mop

Filler plane | Art. no. 10040061



■ for planing fillers – matt or polished finish for excess wax

Windmöller GmbH

Nord-West-Ring 21 D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0 Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de



Wineo